







**NORLYS is a Scandinavian company** with a 50 years history in the professional lighting business. We offer one of the largest product ranges in decorative outdoor lighting and we deliver highest quality all over the world.

**No secret:** our quality comes from the choice of excellent raw-material in combination with a perfectly controlled production process. All our products are made in Europe in our own ISO 9001 certified factory. On a surface of more than 15000m<sup>2</sup> we use most modern machines and equipment. Steady investment keeps us on the top of the industrial process. A good example is our foundry, one of the most modern installations in Europe.

**When we cannot do it alone,** we carefully choose our partners. This is especially important in the field of LED technology. We use the best LED quality from the very best suppliers. No compromise allowed!








**Good design, large choice, excellent quality:** indeed that's what our customers appreciate! In this world of quick exchange it is equally important to work on high delivery-speed. This is why we have several very large warehouses with thousands of finished products ready to be shipped. If something is not already in stock, we produce within days.

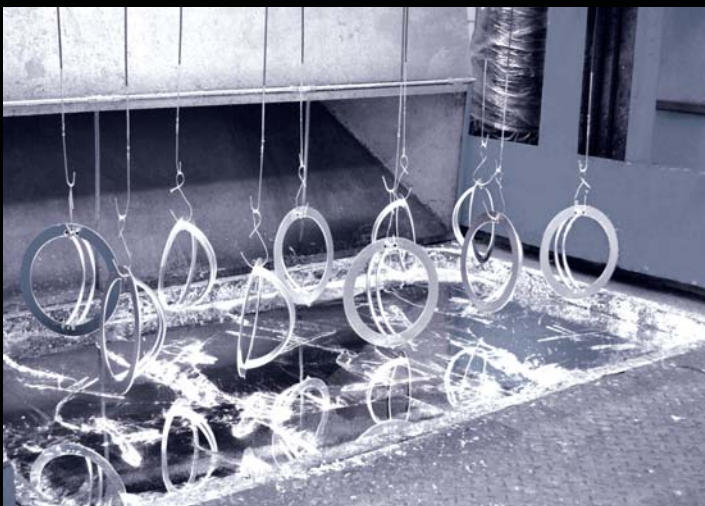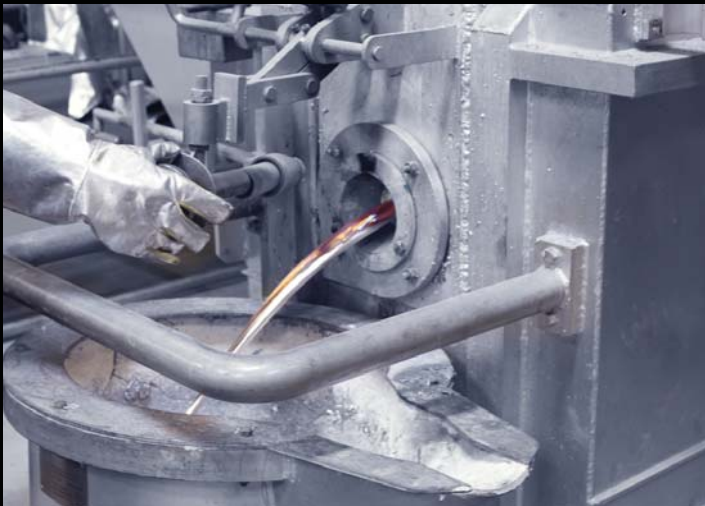





No pictures contained in this catalogue can be reproduced, even partially. The Company reserves the right to change technical and aesthetical characteristics of illustrated products at any times, in order to increase constantly their quality and performance without written notice.

# LIGHT SOURCE / SOCKET

## LIGHT SOURCE



## SOCKET



NORLYS offers a large variety of lamp options. Please refer to the concerned product page for details. The large majority of our products is delivered without lamp.

Many fixtures are equipped with E27 lampholder. Please see below for equivalents between GLS and halogen lamps to be used. For example if a 60W incandescent lamp is recommended, you can use halogen lamps up to 46W. Alternatively you might use fluo compact lamps with integrated ballast or LED retrofit lamps for E27 lampholder. Do not hesitate to contact us for advice.

| HALOGEN |     | GLS  |
|---------|-----|------|
| 30W     | <=> | 40W  |
| 46W     | <=> | 60W  |
| 57W     | <=> | 75W  |
| 77W     | <=> | 100W |

In some exceptional cases our products are delivered with LED bulb(s). Originally this has been done to make sure that the right lamp is being used in the concerned fixture. In other cases it simply makes installation easier (see RENA inground fixtures).

Finally, you will as well find a large number of products with LED module. LED modules allow better cooling and optimized control of the light output. Certain fixtures use more than one module and in the case of VISBY for example, each module can be driven separately. As a result you have a fixture allowing many different applications (twilight detector, movement detector, different light output in function to your needs). LED modules are a good solution to save energy and to decrease maintenance cost over the time.

## Color temperatures (Kelvin)



Look for LED products: See the green house



# COLOR

## COLOR CHART

Important: Each product number in the catalogue are specified with a standard color.

Other colours by request.



ALUMINIUM, RAL 9006



GRAPHITE, RAL 7016



WHITE, RAL 9003



GALVANIZED STEEL



COPPER



BLACK, RAL 9005



STAINLESS STEEL



BLACK/GREEN



BLACK/COPPER



BLACK/SILVER



BLACK/GOLD

# INDEX



ALTA  
p. 70, 71



ARVIKA  
p. 25




ASKER  
p. 40, 41



BASEL  
p. 56, 57



BERGEN FAMILY  
p. 92, 93



BERLIN  
p. 82, 83



BERN  
p. 54, 55



BODEN  
p. 58, 59



BOLOGNA FAMILY  
p. 116, 117



BORNHOLM  
p. 52, 53



BREMEN  
p. 80, 81



CHELSEA FAMILY  
p. 94 - 97




COMO FAMILY  
p. 118




EGERSUND  
p. 22, 23



FIRENZE  
p. 119



GENEVE  
p. 42, 43



GENOVA  
p. 98, 99



GENOVA MINI  
p. 98



GLASGOW  
p. 100, 101



GRIMSTAD  
p. 36, 37



HALDEN  
p. 48, 49



HALMSTAD FAMILY  
p. 68, 69



HAMBURG  
p. 82



HELSINKI FAMILY  
p. 33 - 35



KARLSTAD  
p. 90, 91



KIRUNA  
p. 32



KOSTER FAMILY  
p. 16 - 19



LATINA  
p. 101



LILLEHAMMER  
p. 30, 31



LOFOTEN  
p. 102, 103

# INDEX



LONDON FAMILY  
p. 104 - 109



LUND FAMILY  
p. 84, 85



MODENA FAMILY  
p. 110 - 115



MOLDE  
p. 64, 65



NAMSOS  
p. 36



NARVIK  
p. 24



NICE  
p. 12, 13



NORDKAPP  
p. 62, 63



NORDLAND  
p. 60, 61



OSLO FAMILY  
p. 86, 87



PARIS  
p. 88, 89



RENA  
p. 38, 39



RIMINI/MILANO FAMILY  
p. 120, 121



ROMA  
p. 101



RONDANE  
p. 50, 51




SANDE FAMILY  
p. 26, 27



SANDVIK FAMILY  
p. 44, 45



SCANDINAVIAN WOOD  
p. 66, 67



STAVANGER  
p. 20, 21



STOCKHOLM FAMILY  
p. 72 - 79



SUNNFJORD  
p. 8, 9



VANSBRO  
p. 93



VASA  
p. 46, 47



VENEDIG  
p. 98




VISBY  
p. 10, 11



VOSS  
p. 28, 29



TELESCOPIC POLES  
p. 14, 15



ACCESSORIES  
p. 122, 123



# SUNNFJORD



ART. 1507 & 1508



ART. 1505 & 1506



## SUNNFJORD

IP65, class I  
Ideally suited for use in communal areas such as car parks and walkways, Sunnfjord is a powder coated aluminium head.

For use on poles with 76mm external diameter at top.

See also poles for use with Sunnfjord on p. 14

**Art. 1505**  
150W HIT, G12  
Frosted lens  
Aluminium, 1505AL  
Graphite, 1505GR

**Art. 1506**  
70W HIT, G12  
Frosted lens  
Aluminium, 1506AL  
Graphite, 1506GR

**Art. 1507**   
43W LED  
Frosted lens.  
Aluminium, 1507AL  
Graphite, 1507GR

LED module \*  
- 43W LED  
- 6000 lumen  
- Up to 60 000h  
- Warm white, 4000K  
- Replaceable LED module

**Art. 1508**   
33,5W LED  
Frosted lens.  
Aluminium, 1508AL  
Graphite, 1508GR

LED module \*  
- 33,5W LED  
- 4400 lumen  
- Up to 60 000h  
- Warm white, 4000K  
- Replaceable LED module

**Accessories**  
**Art. 1509**  
Adapter for 76/60mm  
Aluminium, 1509AL  
Graphite, 1509GR

Suitable to use with poles  $\varnothing$  60mm



For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.





# VISBY



## VISBY

IP65, class I  
Ideally suited for use in communal areas such as car parks and walkways, Visby is a powder coated aluminium head fitted with a UV resistant polycarbonate lens.

For use on poles with 60mm external diameter at top.

See also poles for use with Visby on p. 14

### Art. 564

Sodium 50W, HSE, E27 / Metal Halide HIE.  
Aluminium, 564AL  
Graphite, 564GR  
White, 564W

### Art. 566

Sodium 70W, HSE, E27 / Metal Halide HIE.  
Aluminium, 566AL  
Graphite, 566GR  
White, 566W

### Art. 567

Sodium 50-70W, HSE, E27 / Metal Halide HIE.  
Aluminium, 567AL  
Graphite, 567GR  
White, 567W

### Art. 569

150W HIT, G12  
Aluminium, 569AL  
Graphite, 569GR  
White, 569W

### Art. 575

70W HIT, G12  
Aluminium, 575AL  
Graphite, 575GR  
White, 575W

### Art. 576

42,7W + 27,8W LED  
Aluminium, 576AL  
Graphite, 576GR  
White, 576W

LED module\*  
- 42,7W LED (up)  
- 3000 lm  
- Warm white, 3000°K  
- Up to 50 000h  
- 27,8W LED (down)  
- 2000 lm  
- Warm white, 3000K  
- Up to 50 000h

### Art. 577

42,7W LED  
Aluminium, 577AL  
Graphite, 577GR  
White, 577W



LED module\*  
- 42,7W LED (up)  
- 3000 lm  
- Warm white, 3000K  
- Up to 50 000h



For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

# NICE



**NICE**  
IP65, class I  
Ideally suited for use in communal areas such as car parks and walkways. Powder coated aluminium head.  
For use on poles with 60mm external diameter at top.

See also poles for use with Visby on p. 14

**Art. 770**  
HIT 70W CDM-T, G12  
Aluminium, 770AL  
Graphite, 770GR  
White, 770W

**Art. 772**  
HIT 150W CDM-T, G12  
Aluminium, 772AL  
Graphite, 772GR  
White, 772W

**Art. 774**  
HIT 35W CDM-T, G12  
Aluminium, 774AL  
Graphite, 774GR  
White, 774W

**Art. 777**   
43W LED  
Aluminium, 777AL  
Graphite, 777GR  
White, 777W


LED module  
- 43W LED  
- 4950 lm  
- Warm white, 3000K  
- Up to 50 000h

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.




## TELESCOPIC POLE

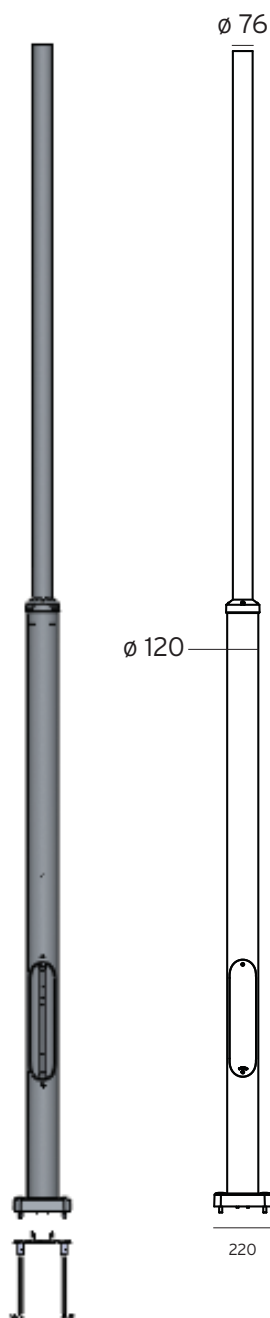


Max=4490 mm

Min=3625 mm

ART. 7661



ART. 7662



### POLE

For use with products VISBY, SUNNFJORD, NICE and KOSTER.

Ideally suited for use in communal areas such as car parks and walkways.

The pole is telescopic and can be adjusted from: Minimum 3625mm to maximum 4490mm. Top tube Ø 76mm.

### Art. 3005


Included service door + anchors

### Art. 3006

Included service door + anchors + art 7661

### Art. 3007

Included service door + anchors + Art 7662, EK 480




### Accessories

#### Art. 7660

Adapter for 76/60mm (short version)

\* Must be used with **VISBY and KOSTER Art. 727, 729, 1913** head Ø 60mm



### Accessories

#### Art. 7665


Adapter for 76/60mm (long version)

\* Must be used with **NICE** head Ø 60mm

ART. 7662



ART. 7661



### Accessories

#### Art. 7661


Electric box for pole 3006

#### Art. 7662


Electric box for pole 3007 (EK 480 G1S-2D)



# KOSTER





ART. 727, 729, 1913

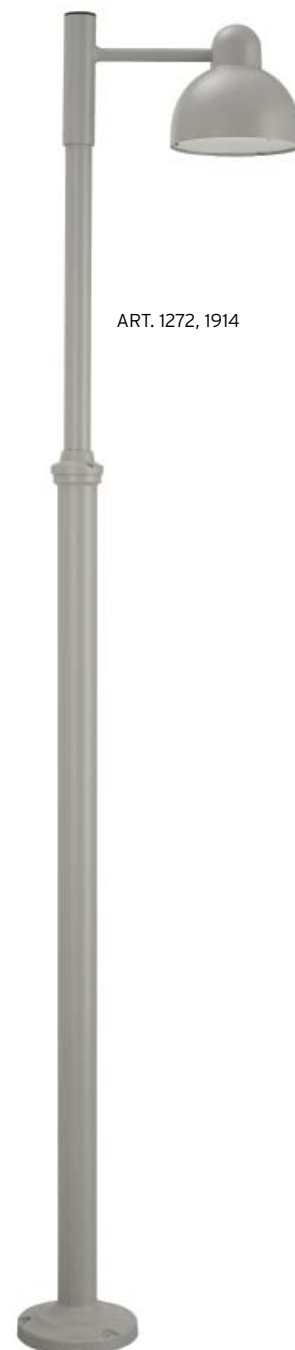

ART. 1272, 1914

KOSTER FAMILY →



## KOSTER LAMP HEAD

IP54, Class I  
Ideally suited for use in communal areas such as car parks and walkways, Koster is a powder coated aluminium head supplied with optical structure polycarbonate lens.  
**Art. 727, 729 and 1913: For use on poles with 60mm external diameter at top.**  
See also poles for use with Koster on p. 14

**Art. 727**  
26W, G24q-3, HF  
Aluminium, 727AL  
Graphite, 727GR  
White, 727W

**Art. 729**  
12W LED   
Aluminium, 729AL  
Graphite, 729GR  
White, 729W  
LED version \*  
- 12W LED  
- 1100 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1913**  
27,8W LED   
Aluminium, 1913AL  
Graphite, 1913GR  
White, 1913W

LED version \*  
- 27,8W LED  
- 2000 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

## KOSTER TELESCOPIC POLE

IP54, class I  
Ideally suited for use in communal areas such as car parks and walkways, Powder coated aluminium.  
Optical structure polycarbonate lens.  
Pole and head included.  
**Accessories for 1272 and 1914**  
**Art. 405**  
Concreting anchor  
**Art. 406**  
Anchoring support

**Art. 1272**  
12W LED   
Aluminium, 1272AL  
Graphite, 1272GR  
White, 1272W

LED version \*  
- 12W LED  
- 1100 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1914**  
27,8W LED   
Aluminium, 1914AL  
Graphite, 1914GR  
White, 1914W



LED version \*  
- 27,8W LED  
- 2000 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)  
\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.





# KOSTER



**KOSTER**  
Powder coated aluminium wall light supplied with optical structure polycarbonate lens. IP54

**Accessories**  
**Art. 158**  
Corner bracket for Koster wall models. Aluminium, 158AL Graphite, 158GR White, 158W

**Art. 720**  
77W Halo. max, class II. Aluminium, 720AL Graphite, 720GR White, 720W

**Art. 723**  
26W, G24q-3, HF, class I. Aluminium, 723AL Graphite, 723GR White, 723W

**Art. 721**   
12W LED class I. Aluminium, 721AL Graphite, 721GR White, 721W

LED version\*  
- 12W LED  
- 1100 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1911**   
27,8W LED class I. Aluminium, 1911AL Graphite, 1911GR White, 1911W

LED version\*  
- 27,8W LED  
- 2000 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 724**  
77W Halo. max, class I. Aluminium, 724AL Graphite, 724GR White, 724W

**Art. 728**  
26W, G24q-3, HF, class I Aluminium, 728AL Graphite, 728GR White, 728W

**Art. 725**   
12W LED class I. Aluminium, 725AL Graphite, 725GR White, 725W

LED version\*  
- 12W LED  
- 1100 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module


**Art. 1912**   
27,8W LED class I. Aluminium, 1912AL Graphite, 1912GR White, 1912W

LED version\*  
- 27,8W LED  
- 2000 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

# STAVANGER



**STAVANGER**  
IP65, class I  
Powder coated aluminium bollard.  
Lens: UV stabilised polycarbonate,  
vandal resistant.  
Indirect LED light output.

## Accessories for Stavanger bollards

**Art. 1230**  
Concreting anchor for Stavanger range.


**Art. 1231**  
Anchoring support for Stavanger range.

**Art. 1240**   
14,7W LED  
Aluminium, 1240AL  
Graphite, 1240GR

LED version \*  
- 14,7W LED  
- 1380 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1241**  
35W, G12, HIT  
Aluminium, 1241AL  
Graphite, 1241GR

**Art. 1242**  
70W, G12, HIT  
Aluminium, 1242AL  
Graphite, 1242GR




**Art. 1244**   
14,7W LED  
Aluminium, 1244AL  
Graphite, 1244GR

LED version \*  
- 14,7W LED  
- 1380 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1245**   
7W LED  
Aluminium, 1245AL  
Graphite, 1245GR

LED version \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module



**Art. 1247**   
7W LED  
Aluminium, 1247AL  
Graphite, 1247GR

LED version \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)



\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



# EGERSUND



LED



**EGERSUND**  
IP65, class I  
Powder coated aluminium bollard.  
Lens: UV stabilised polycarbonate,  
vandal resistant.  
Indirect LED light output.

**Art. 1280**   
17,6W LED  
Aluminium, 1280AL  
Graphite, 1280GR

LED version \*  
- 17,6 LED  
- 2240 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1285**   
17,6W LED  
Aluminium, 1285AL  
Graphite, 1285GR

LED version \*  
- 17,6 LED  
- 2240 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Accessories for Art. 1230**  
Concreting anchor for Egersund range.

**Art. 1231**  
Anchoring support for Egersund range.


For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.





## NARVIK



### NARVIK

IP65, class I  
Heavy duty bollard.  
Powder coated aluminium  
bollard. Glare free with  
indirect light effect on  
internal conical tube. Lens  
stabilised polycarbonate,  
vandal resistant.

Concreting anchor:  
included.

### Art. 552

HIT 35W, G12  
Aluminium, 552AL  
Graphite, 552GR  
White, 552W

### Art. 556

26W, G24q-3, HF  
Aluminium, 556AL  
Graphite, 556GR  
White, 556W

### Art. 557

28W LED   
Aluminium, 557AL  
Graphite, 557GR  
White, 557W

LED version  
- 28W LED  
- 3000 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

### Art. 558

HIT 70W, G12  
Aluminium, 558AL  
Graphite, 558GR  
White, 558W

(For use with Dali  
systems.)

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

## ARVIKA



### ARVIKA

IP54, class I

Arvika can be delivered with normal jack contacts automatic fuses and earth fault. Contact Norlys directly. (Art.892, 895 and is supplied with bulb as standard).

### Accessories

Supplied with concrete anchor kit as standard.

### Art. 890

HIT 35W, G12  
Galvanized steel, 890GA  
Black, 890B

### Art. 892

OSRAM DULUX T/E 18W, Gx24 q-2  
Galvanized steel, 892GA  
Black, 892B






### Art. 894 (normal jack contacts)

HIT 35W, G12  
Galvanized steel, 894GA  
Black, 894B

### Art. 895 (normal jack contacts)

OSRAM DULUX T/E 18W, Gx24 q-2  
Galvanized steel, 895GA  
Black, 895B

# SANDE



## SANDE series

IP65, class I  
Landscape and shop lighting  
fixture in aluminium.  
Adjustable head for tilting.

**Info LED version with \***  
4W, LED, GU 10, 250 lumen,  
Up to 40000h, dimmable,  
warm white, 3000K,  
replaceable light source



**Info LED version with \***  
7W LED, 750 lumen,  
up to 50000h,  
warm white, 3000K,  
replaceable LED module



### Art. 1590

(Wall, short arm)  
4W, LED, GU10, 40D  
Graphite, 1590GR

### Art. 1591

(Wall, short arm)  
7W, LED  
Graphite, 1591GR

### Art. 1592

(With 5m cable and  
plug incl. spike)  
4W, LED, GU 10  
Graphite, 1592GR

### Art. 1593

(With 5m cable and  
plug incl. spike)  
7W, LED  
Graphite, 1593GR

**For use as wall  
application  
remove spike**

### Art. 1595

(Wall, long arm)  
7W, LED  
Graphite, 1595GR

### Art. 1594

(Ground, short arm)  
7W, LED  
Graphite, 1594GR

### Accessories Art. 1234

### Art. 1596

(Ground, long arm)  
7W, LED  
Graphite, 1596GR

### Accessories Art. 1234

### Accessories

**Art. 1233**  
Cap

### Accessories


**Art. 1234**  
Spike for:  
Art. 1594  
Art. 1596

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



# VOSS




## VOSS


IP 54, Class I

Die cast aluminium up and down wall light.


Other varying beam angles and socket (E27) available by special order. Log on to [www.norlys.com](http://www.norlys.com) or please contact supplier.



**ART. 783  
(version. A)**  
70W HIT, G12  
Aluminium, 783AL  
Graphite, 783GR



**ART. 780  
(version. B)**  
70W HIT, G12  
Aluminium, 780AL  
Graphite, 780GR



**ART. 784  
(version. F)**  
70W HIT, G12  
Aluminium, 784AL  
Graphite, 784GR



**ART. 785  
(version. G)**  
70W HIT, G12  
Aluminium, 785AL  
Graphite, 785GR

**ART. 787  
(version. A)**  
35W HIT, G12  
Aluminium, 787AL  
Graphite, 787GR

**ART. 786  
(version. B)**  
35W HIT, G12  
Aluminium, 786AL  
Graphite, 786GR

**ART. 788  
(version. F)**  
35W HIT, G12  
Aluminium, 788AL  
Graphite, 788GR

**ART. 789  
(version. G)**  
35W HIT, G12  
Aluminium, 789AL  
Graphite, 789GR






# LILLEHAMMER




LED



**Lillehammer**  
IP 65, Class I

Die cast aluminium.  
Clear glass.  
Art 1580 and 1582  
can be turned both  
ways.



**Art. 1580**   
2x3W LED  
Aluminium, 1580AL  
Graphite, 1580GR  
White, 1580W

LED version \*  
- 2x3W LED  
- 2x250 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module



**Art. 1581**   
2x3W LED  
Aluminium, 1581AL  
Graphite, 1581GR  
White, 1581W

LED version \*  
- 2x3W LED  
- 250 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module



**Art. 1582**   
3W LED  
Aluminium, 1582AL  
Graphite, 1582GR  
White, 1582W



LED version \*  
- 3W LED  
- 250 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



## KIRUNA



**KIRUNA**  
IP 66, class II  
Heavy duty anti vandal  
fixture. Powder coated  
aluminium. Supplied with  
a 4mm anti vandal opal  
UV polycarbonate lens.

Art. 595, 596 opal lens.

(Options also available  
with clear glass, contact  
your supplier.)

**Art. 595**  
26W, G24q-3, HF  
Aluminium, 595AL  
Graphite, 595GR

**Art. 596**   
30W LED  
Aluminium, 596AL  
Graphite, 596GR

LED MODUL \*  
- 30W LED  
- 2000 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module


For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

# HELSINKI



HELSINKI FAMILY →




**HELSINKI**  
IP 54  
Powder coated  
aluminium wall light.  
Available in a bent  
or straight arm  
option.  
Supplied with clear  
polycarbonate lens.

**ART. 882**  
77W Halo. max, E27, class II  
Aluminium, 882AL  
Graphite, 882GR  
White, 882W

**ART. 883**  
26W, G24q-3, HF, class I  
Aluminium, 883AL  
Graphite, 883GR  
White, 883W

## Accessories

**Art. 156**  
Corner bracket for art 882 and 883.  
Aluminium, 156AL  
Graphite, 156GR  
White, 156W



**ART. 886**  
77W Halo. max, class I  
Aluminium, 886AL  
Graphite, 886GR  
White, 886W

**ART. 887**  
26W, G24q-3, HF, class I  
Aluminium, 887AL  
Graphite, 887GR  
White, 887W

## Accessories

**Art. 158**  
Corner bracket for art 886 and 887.  
Aluminium, 158AL  
Graphite, 158GR  
White, 158W

# HELSINKI




G12




## HELSINKI TELESCOPIC POLE

Ideally suited for use in communal areas such as car parks and walkways. Powder coated aluminium. Clear polycarbonate lens. Pole and head included. IP54, class I


**ART. 888**  
35W HIT, G12  
Aluminium, 888AL  
Graphite, 888GR  
White, 888W



**ART. 889**  
2x35W HIT, G12  
Aluminium, 889AL  
Graphite, 889GR  
White, 889W



**ART. 881**  
35W HIT, G12  
Aluminium, 881AL  
Graphite, 881GR  
White, 881W



**ART. 885**  
2x35W HIT, G12  
Aluminium, 885AL  
Graphite, 885GR  
White, 885W

## Accessories

### Art. 405

Concreting anchor for Art. 881, 885, 888 and 889

### Art. 406

Concreting anchor for Art. 881, 885, 888 and 889



## NAMSOS



LED







## GRIMSTAD



G24d-2



LED



**NAMSOS**  
IP 65, class I  
Recessed wall lighting  
fixture incl. recessing box.

**Art. 1930**  
9,9W LED  
Aluminium, 1930AL  
Graphite, 1930GR



LED version \*  
- 9,9W LED  
- 1376 lumen  
- Up to 60000h  
- 3000K  
- Replaceable LED module

**GRIMSTAD**  
IP 65, class I  
Recessed wall lighting  
fixture incl. recessing  
box.

**Art. 1540**  
Open frame, white  
tempered safety glass.  
18W, G24d-2  
Aluminium, 1540AL  
Graphite, 1540GR

**Art. 1544**  
8,7W LED  
Aluminium, 1544AL  
Graphite, 1544GR



LED version \*  
- 8,7W LED  
- 505 lumen  
- 3000 K  
- Up to 49000h

**Art. 1541**  
Louvered frame, white  
tempered safety glass.  
18W, G24d-2  
Aluminium, 1541AL  
Graphite, 1541GR

**Art. 1545**  
8,7W LED  
Aluminium, 1545AL  
Graphite, 1545GR



LED version \*  
- 8,7W LED  
- 630 lumen  
- 3000 K  
- Up to 49000h


For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.





# RENA




## RENA

IP 68, class I  
Cast aluminium inground  
lighting fixture.  
Tempered safety glass (max.  
2000Kg) , stainless steel  
316L cover ring.

3m connecting cable  
included. (PG in stainless  
steel for cable 8-12mm)  
Polypropylene box for  
installation included.

Info 5,5W, GU 10 LED  
- 5,5W LED, included  
- 350 lumen  
- Up to 40000h  
- Warm white, 2700K  
- Replaceable light source




**Art. 1550**  
Round model  
Clear glass  
5,5W LED, GU 10  
Stainless steel, 1550ST

**Art. 1552**  
Round model  
6W max., GU 10  
Clear glass  
Stainless steel, 1552ST

**Art. 1554**  
Round model  
5,5W LED, GU 10  
Frosted glass  
Stainless steel, 1554ST

**Art. 1556**  
Round model  
6W max., GU 10  
Frosted glass  
Stainless steel, 1556ST




**Art. 1551**  
Square model  
Clear glass  
5,5W LED, GU 10  
Stainless steel, 1551ST

**Art. 1553**  
Square model  
6W max., GU 10  
Clear glass  
Stainless steel, 1553ST

**Art. 1555**  
Square model  
Frosted glass  
5,5W LED, GU 10  
Stainless steel, 1555ST


**Art. 1557**  
Square model  
6W max., GU 10  
Frosted glass  
Stainless steel, 1557ST

# ASKER




**ASKER**  
IP 65, class I.  
Cast aluminium powder  
coated wall light.  
Supplied with structure  
polycarbonate lens

For best light distribution  
we recommend version  
with LED or 18W.



**Art.1513**  
E27, 46W Halo. max.  
Aluminium, 1513AL  
Graphite, 1513GR  
White, 1513W

**Art.1516**  
18W, G24q-2, HF  
Aluminium, 1516AL  
Graphite, 1516GR  
White, 1516W



**Art.1510**   
8,7W LED  
Aluminium, 1510AL  
Graphite, 1510GR  
White, 1510W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module




**Art.1514**  
E27, 46W Halo. max.  
Aluminium, 1514AL  
Graphite, 1514GR  
White, 1514W

**Art.1517**  
18W, G24q-2, HF  
Aluminium, 1517AL  
Graphite, 1517GR  
White, 1517W




**Art.1511**   
8,7W LED  
Aluminium, 1511AL  
Graphite, 1511GR  
White, 1511W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module



**Art.1515**  
E27, 46W Halo. max.  
Aluminium, 1515AL  
Graphite, 1515GR  
White, 1515W

**Art.1518**  
18W, G24q-2, HF  
Aluminium, 1518AL  
Graphite, 1518GR  
White, 1518W



**Art.1512**   
8,7W LED  
Aluminium, 1512AL  
Graphite, 1512GR  
White, 1512W



LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



# GENEVE



## GENEVE

IP 54, class I  
Cast aluminium powder coated  
up and down wall light, supplied  
with opal polycarbonate lens.

\* For best light distribution we  
recommend version with LED,  
13W or 18W.

## ART. 874

E27, 46W Halo. max  
Aluminium, 874AL  
Graphite, 874GR  
White, 874W

## ART. 876

13W, G24q-1, HF  
Aluminium, 876AL  
Graphite, 876GR  
White, 876W

## ART. 877

18W, G24q-2, HF  
Aluminium, 877AL  
Graphite, 877GR  
White, 877W

## Art. 879

8,7W LED   
Aluminium, 879AL  
Graphite, 879GR  
White, 879W

LED module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)


\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.








## SANDVIK




**SANDVIK**  
IP 65, class I  
Powder coated  
aluminium.  
Tempered glass.

**ART. 791**  
2x20W max, GU 10  
Aluminium, 791AL  
Graphite, 791GR  
White, 791W



**ART. 793**  
20W max, GU 10  
Aluminium, 793AL  
Graphite, 793GR  
White, 793W



**ART. 795**  
20W max, GU 10  
Aluminium, 795AL  
Graphite, 795GR  
White, 795W

**ART. 792**  
2x4W, LED, GU 10  
Aluminium, 792AL  
Graphite, 792GR  
White, 792W

(LED bulb from Philips is  
included on Art. 792).  
Art. 791 and 792  
Up and down wall light

**ART. 794**  
4W, LED, GU 10  
Aluminium, 794AL  
Graphite, 794GR  
White, 794W


(LED bulb from Philips is  
included on Art. 794).  
Art. 793 and 794  
Down wall light

**ART. 796**  
4W, LED, GU 10  
Aluminium, 796AL  
Graphite, 796GR  
White, 796W

(LED bulb from Philips is  
included on Art. 796).  
Art. 795 and 796  
Down ceiling light.



## VASA



### VASA IP65, class I

Powder coated cast aluminium up and down wall light. Supplied with optical structure polycarbonate lens to give even light distribution.

### Art. 120 E27, 57W Halo. max Aluminium, 120AL Graphite, 120GR White, 120W

### Art. 123 18W, G24q-2, HF Aluminium, 123AL Graphite, 123GR White, 123W

### Art. 126 26W, G24q-3, HF Aluminium, 126AL Graphite, 126GR White, 126W

### Art. 127 10W LED Aluminium, 127AL Graphite, 127GR White, 127W

LED light source  
- 10W, E27 LED included  
- 806 lumen  
- Dimmable  
- 25000 hours  
- Warm white, 2700K  
- Replaceable light source.

### Art. 128 2x8,7W LED Aluminium, 128AL Graphite, 128GR White, 128W



LED Module \*  
- 2x 8,7W LED  
- 2x630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)  
\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.





# HALDEN



**HALDEN**  
IP65, class I  
Powder coated cast aluminium  
wall light. Supplied with optical  
structure polycarbonate lens to  
give even light distribution.

**Available on request:**  
Special finish in Black Copper.

**Art. 510**  
E27, 57W Halo. max  
Aluminium, 510AL  
Graphite, 510GR  
White, 510W  
**Art. 516**  
18W, G24q-2, HF  
Aluminium, 516AL  
Graphite, 516GR  
White, 516W  
**Art. 518**  
26W, G24q-3, HF  
Aluminium, 518AL  
Graphite, 518GR  
White, 518W

**Art. 517**   
13W LED  
Aluminium, 517AL  
Graphite, 517GR  
White, 517W

LED Module \*  
- 13W LED  
- 940 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 519**   
8,7W LED  
Aluminium, 519AL  
Graphite, 519GR  
White, 519W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.


For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)  
\* Design and technical details: The characteristics of the models  
mentioned are not binding. Norlys reserves itself the right to  
change them without notice and without obligation of  
communication in according to its own technical constructive  
requirements and/or to improve the products.



## RONDANE



G24q-1 G24q-2 LED



### RONDANE

IP65, class I  
Powder coated aluminium wall light supplied with polycarbonate lens. Rondane is suitable for wall and ceiling mounting.

**Art. 530**  
13W, G24q-1, HF  
Aluminium, 530AL  
Graphite, 530GR  
White, 530W

**Art. 531**  
18W, G24q-2, HF  
Aluminium, 531AL  
Graphite, 531GR  
White, 531W

**Art. 536**  
8,7W LED  
Aluminium, 536AL  
Graphite, 536GR  
White, 536W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 537**  
13W LED  
Aluminium, 537AL  
Graphite, 537GR  
White, 537W

LED Module \*  
- 13W LED  
- 940 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.








## BORNHOLM



G24q-1 G24q-2 G24q-3 LED



### BORNHOLM IP65, class I

Powder coated aluminium wall light supplied with polycarbonate lens. Bornholm is suitable for wall and ceiling mounting.

**Art. 532**  
13W, G24q-1, HF  
Aluminium, 532AL  
Graphite, 532GR  
White, 532W

**Art. 533**  
18W, G24q-2, HF  
Aluminium, 533AL  
Graphite, 533GR  
White, 533W

**Art. 534**  
26W, G24q-3, HF  
Aluminium, 534AL  
Graphite, 534GR  
White, 534W

**Art. 540**   
8,7W LED  
Aluminium, 540AL  
Graphite, 540GR  
White, 540W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 541**   
13W LED  
Aluminium, 541AL  
Graphite, 541GR  
White, 541W



LED Module  
- 13W LED  
- 940 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



## BERN



### BERN IP54, class I

Wallplate in aluminium. Front in Galvanized steel, stainless steel, powder coated black steel or copper. Massive copper reveals a nice and natural patina with age. Heavy clear or frosted glass. We use stainless steel 316L. An oil application from time to time insures long time beauty of the fixture.

**Art. 650**  
E27, 46W Halo. max clear glass  
Stainless steel, 650ST  
Galvanized, 650GA  
Black, 650B

**Art. 651**  
E27, 46W Halo. max frosted glass  
Stainless steel, 651ST  
Galvanized, 651GA  
Black, 651B  
Copper, 651CO

**Art. 653**  
13W, G24q-1, HF frosted glass  
Stainless steel, 653ST  
Galvanized, 653GA  
Black, 653B

**Art. 655**   
8,7W LED frosted glass  
Stainless steel, 655ST  
Galvanized, 655GA  
Black, 655B

LED Module \*  
- 8,7W LED  
- 505 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 656**   
13W LED frosted glass  
Stainless steel, 656ST  
Galvanized, 656GA  
Black, 656B

LED Module \*  
- 13W LED  
- 1010 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.


For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in cording to its own technical constructive requirements and/or to improve the products.





## BASEL



### BASEL IP54, class I

Wallplate in aluminium. Front in galvanized steel, stainless steel, powder coated black steel or copper.

Massive copper reveals a nice and natural patina with age. Heavy clear or frosted glass. We use stainless steel 316L. An oil application from time to time insures long time beauty of the fixture.

\*Also available (on request) models with motion detectors.

**Art. 660**  
E27, 57W Halo. max clear glass  
Stainless steel, 660ST  
Galvanized, 660GA  
Black, 660B

**Art. 661 \***  
E27, 57W Halo. max frosted glass  
Stainless steel, 661ST  
Galvanized, 661GA  
Black, 661B  
Copper, 661CO

**Art. 663**  
13W, G24q-1, HF frosted glass  
Stainless steel, 663ST  
Galvanized, 663GA  
Black, 663B

**Art. 664**  
26W, G24q-3, HF frosted glass  
Stainless steel, 664ST  
Galvanized, 664GA  
Black, 664B

**Art. 668**   
8,7W LED  
frosted glass  
Stainless steel, 668ST  
Galvanized, 668GA  
Black, 668B

LED Module \*  
- 8,7W LED  
- 505 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.




**Art. 669**   
13W LED  
frosted glass  
Stainless steel, 669ST  
Galvanized, 669GA  
Black, 669B

LED Module \*  
- 13W LED  
- 1010 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

# BODEN

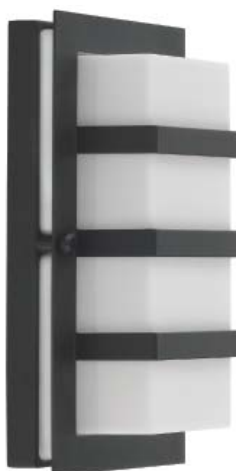

**BODEN**  
IP54, class I.

Art. 860, 863,  
864, 866 and 867:  
Opal polycarbonate

Art. 862: Clear  
polycarbonate

**Art.860**  
E27, 46W Halo. max  
Galvanized steel, 860GA  
Black, 860B

**Art.862**  
E27, 46W Halo. max  
Galvanized steel, 862GA  
Black, 862B

**Art.863**  
13W, G24q-1, HF  
Galvanized steel, 863GA  
Black, 863B

**Art.864**  
18W, G24q-2, HF  
Galvanized steel, 864GA  
Black, 864B

**Art. 866**   
8,7W LED  
Galvanized, 866GA  
Black, 866B

LED Module \*  
- 8,7W LED  
- 505 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 867**   
13W LED  
Galvanized, 867GA  
Black, 867B

LED Module \*  
- 13W LED  
- 1010 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)


\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.







## NORDLAND



### NORDLAND

IP65, class I  
Powder coated aluminium  
wall light supplied with  
opal polycarbonate lens.

Nordland is suitable  
for wall and ceiling  
mounting.

#### Art. 711

13W, G24q-1, HF  
Aluminium, 711AL  
Graphite, 711GR  
White, 711W

#### Art. 713

2x13W, G24q-1, HF  
Aluminium, 713AL  
Graphite, 713GR  
White, 713W

#### Art. 714

26W, G24q-3, HF  
Aluminium, 714AL  
Graphite, 714GR  
White, 714W

#### Art. 715

2x26W, G24q-3, HF  
Aluminium, 715AL  
Graphite, 715GR  
White, 715W

#### Art. 718

13W LED   
Aluminium, 718AL  
Graphite, 718GR  
White, 718W

#### LED Module \*

- 13W LED
- 1010 lumen
- Up to 39000h
- Warm white, 3000K
- Replaceable LED module.

#### Art. 719

17,5W LED   
Aluminium, 719AL  
Graphite, 719GR  
White, 719W


#### LED Module \*

- 17,5W LED
- 1550 lumen
- Up to 47000h
- Warm white, 3000K
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

# NORDKAPP



**NORDKAPP**  
IP65, class I  
Powder coated aluminium  
wall light supplied with  
opal polycarbonate lens.

Nordkapp is suitable  
for wall and ceiling  
mounting.

**Art. 527**  
18W, G24q-2, HF  
Aluminium, 527AL  
Graphite, 527GR  
White, 527W

**Art.528**  
13W, G24q-1, HF  
Aluminium, 528AL  
Graphite, 528GR  
White, 528W

**Art.529**  
2x13W, G24q-1, HF  
Aluminium, 529AL  
Graphite, 529GR  
White, 529W

**Art.1490**  
2x26W, G24q-3, HF  
Aluminium, 1490AL  
Graphite, 1490GR  
White, 1490W

**Art. 1620**   
8,7W LED  
Aluminium, 1620AL  
Graphite, 1620GR  
White, 1620W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 1621**   
17,5W LED  
Aluminium, 1621AL  
Graphite, 1621GR  
White, 1621W

LED Module \*  
- 17,5W LED  
- 1550 lumen  
- Up to 47000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.






# MOLDE



LED



**MOLDE**  
IP54, classe I  
Powder coated aluminium bollard.  
Ideal for path-way-lighting where  
light pollution is an issue.

**Art. 1901**  
13W LED   
Aluminium, 1901AL  
Graphite, 1901GR


LED Module  
- 13W LED  
- 800 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module

**Art. 1906**  
Reinforced galvanized  
metal foot for Molde

**Art. 1907**  
Concreting anchor  
for Molde

**Art. 1908**  
Anchoring support  
for Molde

# SCANDINAVIAN WOOD



Our new range of wooden bollards fits perfectly to all projects combining modern lighting in harmony with natural materials.

We use a selection of first class Scandinavian pine wood, impregnated for protection.

Easy maintenance: painted twice during production, refresh the surface with oil paint.

**Special marked with \*:**

Impregnated only: without painting on request to allow customized colours.



## HALMSTAD



## STOCKHOLM



## ALTA



**Scandinavian Wood**  
IP65, class II

**Accessories for Scandinavian wood.**

**Art. 205**  
Concreting anchor for wood series.

**Art. 206**  
Anchoring support for wood series.

**Art. 1400**  
E27, 46W Halo. max  
Galvanized, 1400GA  
Black, 1400B

**Art. 1401**  
13W, G24q-1, HF  
Galvanized, 1401GA  
Black, 1401B

**Art. 1402**  
18W, G24q-2, HF  
Galvanized, 1402GA  
Black, 1402B

**Art. 1410**  
E27, 46W Halo. max  
Galvanized, 1410GA  
Black 1410B

**Art. 1411**  
13W, G24q-1, HF  
Galvanized, 1411GA  
Black, 1411B

**Art. 1412**  
18W, G24q-2, HF  
Galvanized, 1412GA  
Black, 1412B

**Art. 1420**  
E27, 46W Halo. max  
Galvanized, 1420GA  
Black 1420B

**Art. 1421**  
13W, G24q-1, HF  
Galvanized, 1421GA  
Black 1421B

**Art. 1422**  
18W, G24q-2, HF  
Galvanized, 1422GA  
Black 1422B

**Art. 1430**  
E27, 46W Halo. max  
Galvanized, 1430GA  
Black 1430B

**Art. 1431**  
13W, G24q-1, HF  
Galvanized, 1431GA  
Black 1431B

**Art. 1432**  
18W, G24q-2, HF  
Galvanized, 1432GA  
Black 1432B

**Art. 1440**  
E27, 46W Halo. max  
Galvanized, 1440GA  
Black 1440B


**Art. 1441**  
13W, G24q-1, HF  
Galvanized, 1441GA  
Black 1441B

**Art. 1442**  
18W, G24q-2, HF  
Galvanized, 1442GA  
Black 1442B

**Art. 1450**  
E27, 46W Halo. max  
Galvanized, 1450GA  
Black 1450B

**Art. 1451**  
13W, G24q-1, HF  
Galvanized, 1451GA  
Black 1451B

**Art. 1452**  
18W, G24q-2, HF  
Galvanized, 1452GA  
Black 1452B



**Scandinavian Wood**  
IP65, class II  
Impregnated only.

**Accessories for  
Scandinavian  
wood.**


**Art. 205**  
Concreting anchor  
for wood series.

**Art. 206**  
Anchoring support  
for wood series.

**Art. 1403 \***  
E27, 46W Halo. max  
Galvanized, 1403GA  
Black, 1403B




**Art. 1413 \***  
E27, 46W Halo. max  
Galvanized, 1413GA  
Black, 1413B




**Art. 1423 \***  
E27, 46W Halo. max  
Galvanized, 1423GA  
Black, 1423B



**Art. 1433 \***  
E27, 46W Halo. max  
Galvanized, 1433GA  
Black, 1433B





**Art. 1443 \***  
E27, 46W Halo. max  
Galvanized, 1443GA  
Black, 1443B




**Art. 1453 \***  
E27, 46W Halo. max  
Galvanized, 1453GA  
Black, 1453B

\* Impregnated only; without painting on request to allow customized colours.


# HALMSTAD



**Art. 210**  
E27, 46W Halo. max  
Galvanized, 210GA  
Black, 210B



**Art. 295**  
E27, 46W Halo. max  
Galvanized, 295GA 60  
Black, 295B 60



**Art. 296**  
E27, 46W Halo. max  
Galvanized, 296GA 60  
Black, 296B 60


**Accessories**  
**Art. 205**  
Concreting anchor  
for Halmstad range.  
**Art. 206**  
Anchoring support  
for Halmstad range.

**Art. 1485**  
13W, G24q-1, HF  
Galvanized, 1485GA  
Black, 1485B

**Art. 1486**  
18W, G24q-2, HF  
Galvanized, 1486GA  
Black 1486B

**Art. 1480**  
13W, G24q-1, HF  
Galvanized, 1480GA  
Black, 1480B

**Art. 1481**  
18W, G24q-2, HF  
Galvanized, 1481GA  
Black, 1481B



**HALMSTAD WITH LED**  
IP65  
**Bollards with LED: class I**

Galvanized heavy duty steel bollard supplied with opal polycarbonate lens.


**Accessories**

**Art. 205**  
Concreting anchor for Halmstad range.  
**Art. 206**  
Anchoring support for Halmstad range.




**Art. 1489**  
7W LED  
Galvanized, 1489GA  
Black 1489B

LED Module \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module.



**Art. 1482**  
7W LED  
Galvanized, 1482GA  
Black 1482B

LED Module \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module.



**Art. 1487**  
14,7W LED  
Galvanized, 1487GA  
Black 1487B


LED Module \*  
- 14,7W LED  
- 1380 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the



## ALTA



**Art. 291**  
E27, 46W Halo. max  
Galvanized, 291GA  
Black 291B



**Art. 1478**  
7W LED  
Galvanized, 1478GA  
Black 1478B



**Art. 1479**  
14,7W LED  
Galvanized, 1479GA  
Black 1479B



**Art. 293**  
E27, 46W Halo. max  
Galvanized, 293GA  
Black 293B



**Art. 1476**  
7W LED  
Galvanized, 1476GA  
Black 1476B

**ALTA**  
IP65, class II

**Bollards with LED: class I**

Galvanized steel bollard supplied  
with opal polycarbonate lens.

### Accessories

**Art. 205**  
Concreting anchor  
for Alta range.

**Art. 206**  
Anchoring support  
for Alta range.

**Art. 1470**  
18W, G24q-2, HF  
Galvanized, 1470GA  
Black 1470B

**Art. 1471**  
26W, G24q-3, HF  
Galvanized, 1471GA  
Black 1471B

LED Module \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable light module.

LED Module \*  
- 14,7W LED  
- 1380 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 1472**  
18W, G24q-2, HF  
Galvanized, 1472GA  
Black 1472B

**Art. 1473**  
26W, G24q-3, HF  
Galvanized, 1473GA  
Black 1473B

LED Module \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module.


\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



# STOCKHOLM



STOCKHOLM FAMILY →



## STOCKHOLM BOLLARD

Galvanized steel bollard.  
IP65, class II

**Bollards with LED : class I**

### Accessories

**Art. 205**  
Concreting anchor for Stockholm range.

**Art. 206**  
Anchoring support for Stockholm range.

### Art. 288

E27, 46W Halo. max, (Opal).  
Galvanized, 288GA 60  
Black, 288B 60

### Art. 297

E27, 46W Halo. max, (clear).  
Galvanized, 297GA  
Black, 297B

### Art. 1460

13W, G24q-1, HF (Opal).  
Galvanized, 1460GA  
Black, 1460B

### Art. 1461

18W, G24q-2, HF, (Opal).  
Galvanized, 1461GA  
Black, 1461B

### Art. 1462

26W, G24q-3, HF, (Opal).  
Galvanized, 1462GA  
Black, 1462B

### Art. 1265

7W LED, (Opal)   
Galvanized, 1265GA  
Black 1265B

#### LED Module \*

- 7W LED
- 750 lumen
- Up to 50000h
- Warm white, 3000K
- Replaceable LED module.

### Art. 1266


14,7W LED, (Opal)   
Galvanized, 1266GA  
Black 1266B

#### LED Module \*

- 14,7W LED
- 1380 lumen
- Up to 50000h
- Warm white, 3000K
- Replaceable LED module.

For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



#### STOCKHOLM BOLLARD

Galvanized steel bollard.  
IP65, class II

Bollards with LED : class I 

#### Accessories

**Art. 205**  
Concreting anchor for Stockholm range.

**Art. 206**  
Anchoring support for Stockholm range.

**Art. 289**  
E27, 46W Halo. max, (Opal).  
Galvanized, 289GA 60  
Black, 289B 60

**Art. 298**  
E27, 46W Halo. max, (Clear).  
Galvanized, 298GA  
Black, 298B


**Art. 1465**  
13W, G24q-1, HF, (Opal).  
Galvanized, 1465GA  
Black, 1465B

**Art. 1466**  
18W, G24q-2, HF, (Opal).  
Galvanized, 1466GA  
Black, 1466B

**Art. 1467**  
26W, G24q-3, HF, (Opal).  
Galvanized, 1467GA  
Black, 1467B

**Art. 1260**   
7W LED, (Opal)   
Galvanized, 1260GA  
Black 1260B

LED Module \*  
- 7W LED  
- 750 lumen  
- Up to 50000h  
- Warm white, 3000K  
- Replaceable LED module.



**Art. 299**  
E27, 46W Halo. max, (Opal).  
Galvanized, 299GA  
Black, 299B


For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.






## STOCKHOLM



STOCKHOLM FAMILY →



### Stockholm flush IP54, class I

Aluminium back plate. Front detail in powder coated or galvanized steel.

Art. 220, 223, 225, 1600 and 1601: Opal polycarbonate

Art. 226: Clear polycarbonate

**Art. 220**  
E27, 46W Halo. max.  
Galvanized, 220GA  
Black, 220B

**Art. 223**  
13W, G24q-1, HF  
Galvanized, 223GA  
Black, 223B

**Art. 225**  
18W, G24q-2, HF  
Galvanized, 225GA  
Black, 225B

**Art. 226**  
E27, 46W Halo. max  
Galvanized, 226GA  
Black, 226B

**Art. 1600**   
8,7W LED  
Galvanized, 1600GA  
Black, 1600B

LED Module \*  
- 8,7W LED  
- 505 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 1601**   
13W LED  
Galvanized, 1601GA  
Black, 1601B

LED Module \*  
- 13W LED  
- 1010 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.



## STOCKHOLM




STOCKHOLM FAMILY →

### Stockholm

IP54, class II

Supplied with clear polycarbonate lens as standard. Natural copper option will age over time.

(Opal lens available as an option).




#### Art. 280

E27, 46W Halo. max. clear polycarbonate.  
Galvanized steel, 280GA  
Black, 280B  
White, 280W  
Copper, 280CO

#### Accessories

##### Art. 153

Corner bracket for Art. 280.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO



#### Art. 286

E27, 77W Halo. max. clear polycarbonate.  
Galvanized steel, 286GA  
Black, 286B  
White, 286W

#### Accessories

##### Art. 153


Corner bracket for Art. 286.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W




# STOCKHOLM




E27




**Art. 284**  
E27, 46W Halo. max.  
clear polycarbonate.  
Galvanized, 284GA  
Black, 284B  
White, 284W




**Art. 287**  
E27, 77W Halo. max.  
clear polycarbonate.  
Galvanized, 287GA  
Black, 287B  
White, 287W



**Art. 285**  
E27, 46W Halo. max.  
clear polycarbonate.  
Galvanized, 285GA  
Black, 285B  
White, 285W



**Art. 281**  
E27, 77W Halo. max.  
clear polycarbonate.  
Galvanized, 281GA  
Black, 281B  
White, 281W



**Art. 283**  
E27, 2x77W Halo. max.  
clear polycarbonate.  
Galvanized, 283GA  
Black, 283B  
White, 283W

**Stockholm**  
IP54, class II

Supplied with clear polycarbonate lens as standard.

Opal lens available as accessory.

## Accessories

**Art. 405** Concreting anchor for Art. 281 and 283.

**Art. 406** Anchoring support for Art. 281 and 283.

Concreting anchor included for Art. 284, 287 and 285

Art. 284 round foot, diameter 11,5cm.



Art. 285 and 287 round foot, diameter 17cm.

Art. 281 and 283. Diameter foot 23,5 cm. The distance between bolt holes (3 bolts) for post Art. 281 and 283 is 18 cm.





# BREMEN



## BREMEN IP54, class I

The front cover is made of steel and mounted on an aluminium backplate.  
Option of smoked or opal lens.

**Available on request:**  
Special finish in Black Copper.

**Art. 630**  
E27, 46W Halo. max.  
clear polycarbonate.  
Galvanized, 630GA  
Black, 630B

**Art. 631**  
E27, 46W Halo. max.  
opal polycarbonate.  
Galvanized, 631GA  
Black, 631B

**Art. 633**  
13W, G24q-1, HF,  
opal polycarbonate.  
Galvanized, 633GA  
Black, 633B

**Art. 634**  
18W, G24q-2, HF  
opal polycarbonate.  
Galvanized, 634GA  
Black, 634B

**Art. 636**   
8,7W LED  
opal polycarbonate.  
Galvanized, 636GA  
Black, 636B


LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**Art. 637**   
13W LED  
opal polycarbonate.  
Galvanized, 637GA  
Black, 637B



LED Module \*  
- 13W LED  
- 940 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

## BERLIN



## HAMBURG



### BERLIN IP54, class I

Cast aluminium wall light with clear or opal polycarbonate lens options.

**Available on request:**  
Special finish in Black Copper.

**BERLIN  
Art. 610**  
E27, 46W Halo. max., clear polycarbonate.  
Black, 610B  
White, 610W  
Aluminium, 610AL

**Art. 611**  
E27, 46W Halo. max., opal polycarbonate.  
Black, 611B  
White, 611W  
Aluminium, 611AL

**BERLIN  
Art. 613**  
13W, G24q-1, HF, opal polycarbonate.  
Black, 613B  
White, 613W  
Aluminium, 613AL


**Art. 614**  
18W, G24q-2, HF, opal polycarbonate.  
Black, 614B  
White, 614W  
Aluminium, 614AL

**BERLIN  
Art. 616**  
8,7W LED  
opal polycarbonate.  
Black, 616B  
White, 616W  
Aluminium, 616AL

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.

**BERLIN  
Art. 617**  
13W LED  
opal polycarbonate.  
Black, 617B  
White, 617W  
Aluminium, 617AL

LED Module \*  
- 13W LED  
- 940 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.



**HAMBURG**  
IP54, class I

Cast aluminium wall light with clear or opal polycarbonate lens options.

**Available on request:**  
Special finish in Black Copper.

**HAMBURG**  
**Art. 620**

E27, 46W Halo. max., clear polycarbonate. Black, 620B White, 620W Aluminium, 620AL

**Art. 621**

E27, 46W Halo. max., opal polycarbonate. Black, 621B White, 621W Aluminium, 621AL

**HAMBURG**  
**Art. 623**

13W, G24q-1, HF, opal polycarbonate. Black, 623B White, 623W Aluminium, 623AL

**Art. 624**

18W, G24q-2, HF, opal polycarbonate. Black, 624B White, 624W Aluminium, 624AL

**HAMBURG**  
**Art. 626**

8,7W LED opal polycarbonate. Black, 626B White, 626W Aluminium, 626AL

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.



**HAMBURG**  
**Art. 627**


13W LED opal polycarbonate. Black, 627B White, 627W Aluminium, 627AL

LED Module  
- 13W LED  
- 940 lumen  
- Up to 39000h  
- Warm white, 3000K  
- Replaceable LED module.





## LUND




**LUND**  
IP55, Class II,  
Clear polycarbonate.

Art. 274, 275, 290  
Can be ordered with  
frosted glass or clear  
polycarbonate as  
accessories.


**Art. 290**  
E27, 57W Halo. max.  
Galvanized, 290GA  
Black, 290B

**Accessories**  
**Art. 153**  
Corner bracket  
for Art. 290.  
Galvanized steel, 153GA  
Black, 153B



**Art. 274**  
E27, 57W Halo. max.,  
Galvanized, 274GA  
Black, 274B

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art. 274  
**Art. 406**  
Anchoring support  
for Art. 274







**Art. 275**  
E27, 2x57W Halo. max.  
Galvanized, 275GA  
Black, 275B

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art. 275  
**Art. 406**  
Anchoring support  
for Art. 275



# OSLO



## OSLO

IP55, class II  
Clear glass

All Oslo models can be ordered with opal glass, frosted glass or clear polycarbonate as accessories.  
The copper will age naturally over time.

### Art. 240

E27, 57W Halo. max.  
Galvanized, 240GA  
Black, 240B  
White, 240W  
Copper, 240CO

### Accessories

**Art. 153**  
Corner bracket for Art. 240 and 243.  
Galvanized, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO

### Art. 242

E27, 2x57W Halo. max.  
clear glass.  
Galvanized, 242GA  
Black, 242B  
White, 242W

### Accessories

**Art. 405**  
Concreting anchor for Art. 242.  
**Art. 406**  
Anchoring support for Art. 242

### Art. 245

E27, 57W Halo. max.  
clear glass  
Galvanized, 245GA  
Black, 245B  
White, 245W

### Accessories

Concreting anchor included.

*Art. 245 round foot, diameter 17cm.*



### ART. 240A (chain)

E27, 57W Halo. max.  
Galvanized steel, 240A/GA  
Black, 240A/B  
White, 240A/W  
Copper, 240A/CO





# PARIS



## PARIS IP43, class I

This down light gives a subtle wash of light. Over time the copper will age naturally and acquire an antique brown patina.

### Accessories


**Art. 168**  
Number plate for ART. 160 by special order. Only black or galvanized.

**Art. 160**  
E27, 30W Halo. max.  
Galvanized, 160GA  
Black, 160B  
White, 160W  
Copper, 160CO

**Art. 1491**  
13W, G24q-1, HF  
Galvanized, 1491GA  
Black, 1491B  
White, 1491W  
Copper, 1491CO

**Art. 1495**  
8,7W LED  
Galvanized, 1495GA  
Black, 1495B  
White, 1495W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.



**Art. 163**  
E27, 46W Halo. max.  
Galvanized, 163GA  
Black, 163B  
White, 163W

**Art. 1492**  
18W, G24q-2, HF  
Galvanized, 1492GA  
Black, 1492B  
White, 1492W

**Art. 1496**  
8,7W LED  
Galvanized, 1496GA  
Black, 1496B  
White, 1496W

LED Module \*  
- 8,7W LED  
- 630 lumen  
- Up to 49000h  
- Warm white, 3000K  
- Replaceable LED module.



For photometric data contact supplier or log on to [www.norlys.com](http://www.norlys.com)

\* Design and technical details: The characteristics of the models mentioned are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements

# KARLSTAD



E27



**KARLSTAD**  
IP55, class II  
Supplied with clear lens.

Opal, frosted and clear  
**GLASS** options available  
to special order as  
accessories.  
The copper will age  
naturally over time.

**Art. 230**  
E27, 57W Halo. max.  
Galvanized, 230GA  
Black, 230B  
White, 230W  
Copper, 230CO

**Accessories**  
**Art. 153**  
Corner bracket for  
Art 230.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO

**Art. 230A (chain)**  
E27, 57W Halo. max.  
Galvanized, 230A/GA  
Black, 230A/B  
White, 230A/W  
Copper, 230A/CO








## BERGEN



## VANSBRO



### BERGEN

IP55, Class II

Art. 270 and 271  
Can be ordered with  
frosted glass or clear  
polycarbonate as  
accessory.

### BERGEN

**Art. 270**

E27, 57W Halo. max.  
Clear glass.  
Galvanized, 270GA  
Black, 270B  
White, 270W

### Accessories

**Art. 153**

Corner bracket for  
Art 270.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W

### BERGEN

**Art. 271**

E27, 57W Halo. max.  
Clear glass.  
Galvanized, 271GA  
Black, 271B  
White, 271W

### VANSBRO

IP55, class II

Supplied with clear  
polycarbonate lens.

The copper will age  
naturally over time.

### VANSBRO

**Art. 1920**

E27, 57W Halo. max.  
Galvanized, 1920GA  
Black, 1920B  
White, 1920W  
Copper, 1920CO

### Accessories

**Art. 153**

Corner bracket for Art 1920.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO





## CHELSEA



E27




CHELSEA FAMILY →




**Art. 950**

E27, 77W Halo. max.  
Copper, 950CO




**Art. 962**

E27, 57W Halo. max.  
Copper, 962CO




**Art. 963**

E27, 57W Halo. max.  
Copper, 963CO



**Art. 955**

E27, 77W Halo. max.  
Copper, 955CO



**Art. 954**

E27, 77W Halo. max.  
Copper, 954CO

### Accessories

#### Art. 152

Corner bracket  
for Art 954.  
Black, 152B

### CHELSEA RANGE

IP44, class II  
Fabricated from copper and  
supplied with clear polycarbonate  
lens.


Copper fittings are supplied in a  
raw finish to allow natural patina  
over time.

Brackets and posts manufactured  
in aluminium and powder coated  
in black.

Part of Chelsea range is  
available with LED.   
Contact your supplier for more  
information!




## CHELSEA




**Art. 960**  
E27, 77W Halo. max.  
Copper, 960CO

**Accessories**  
**Art. 152**  
Corner bracket for  
Art 960.

Black, 152B




**Art. 961**  
E27, 77W Halo. max.  
Copper, 961CO



**Art. 956**  
E27, 77W Halo. max.  
Copper, 956CO

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 956



**Art. 957**  
E27, 77W Halo. max.  
Copper, 957CO

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 957

### CHELSEA RANGE


IP44, class II  
Fabricated from copper and  
supplied with clear polycarbonate  
lens.

Copper fittings are supplied in a  
raw finish to allow natural patina  
over time.


Brackets and posts manufactured  
in aluminium and powder coated  
in black.

Part of Chelsea range is  
available with LED.   
Contact your supplier for more  
information!


# CHELSEA



**Art. 958**  
E27, 77W Halo. max.  
Copper, 958CO



**Art. 951**  
E27, 77W Halo. max.  
Copper, 951CO



**Art. 953**  
E27, 2x77W Halo. max.  
Copper, 953CO

## Accessories

**Art. 305**  
Concreting anchor for  
Art. 951

**Art. 306**  
Anchoring support for Art.  
951

*Hexagonal foot. 3 holes for  
anchoring. Distance between  
holes: 20,5 cm.*

## Accessories

**Art. 305**  
Concreting anchor for  
Art. 953

**Art. 306**  
Anchoring support  
for Art. 953

*Hexagonal foot. 3 holes for  
anchoring. Distance between  
holes: 20,5 cm.*

## CHELSEA RANGE

IP44, class II  
Fabricated from copper and  
supplied with clear polycarbonate  
lens.

Copper fittings are supplied in a  
raw finish to allow natural patina  
over time.

Brackets and posts manufactured  
in aluminium and powder coated  
in black.

Part of Chelsea range is  
available with LED.   
Contact your supplier for more  
information!


## GENOVA MINI



## GENOVA




## VENEDIG



**GENOVA MINI**  
**Art. 175**

E27, 46W Halo. max.  
IP 54, class II,  
clear polycarbonate.


Black, 175B  
White, 175W



**GENOVA**  
**Art. 170**

E27, 46W Halo. max.  
IP54, class II,  
clear polycarbonate.

Black, 170B  
White, 170W



**VENEDIG**  
**Art. 261**

E27, 46W Halo. max.  
IP54, class II,  
clear polycarbonate.

Black, 261B  
White, 261W






## GLASGOW



## LATINA




## ROMA




**GLASGOW**  
**Art. 730**  
E27, 46W Halo. max.  
IP54, class II,  
clear polycarbonate.

Black, 730B  
White, 730W



**LATINA**  
**Art. 105**  
E27, 46W Halo. max.  
IP44, class II,  
frosted polycarbonate.

Black, 105B  
White, 105W





**ROMA**  
**Art. 169**  
E27, 46W Halo. max.  
IP54, class II,  
clear polycarbonate.

Black, 169B  
White, 169W

# LOFOTEN



E27

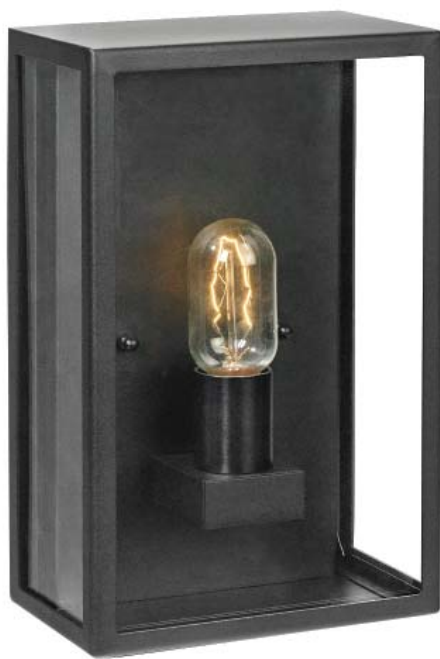

## LOFOTEN

Classic outdoor wallfixture  
with clear glass.  
IP44, classe II

## Art. 1940


E27, 57W Halo. max.  
Black, 1940B



# LONDON



LONDON FAMILY →

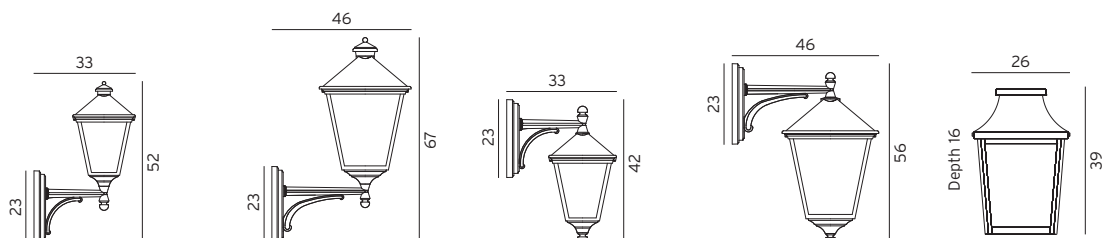

All London range.  
Clear polycarbonate lens.

Art 480, 481, 490 and 493:  
IP54, class II

Art 497:  
IP65, class II

**Art. 480**  
E27, 77W Halo. max.  
Black, 480B  
White, 480W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 480.  
Black, 152B  
White, 152W

**Art. 490**  
E27, 77W Halo. max.  
Black, 490B  
White, 490W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 490.  
Black, 152B  
White, 152W

**Art. 481**  
E27, 77W Halo. max.  
Black, 481B  
White, 481W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 481.  
Black, 152B  
White, 152W

**Art. 493**  
E27, 77W Halo. max.  
Black, 493B  
White, 493W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 493.  
Black, 152B  
White, 152W

**Art. 497**  
E27, 57W Halo. max.  
Black, 497B  
White, 497W






# LONDON




LONDON FAMILY →




**Art. 484**  
E27, 77W Halo. max.  
Black, 484B  
White, 484W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 484




**Art. 494**  
E27, 77W Halo. max.  
Black, 494B  
White, 494W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 494.




**Art. 485**  
E27, 77W Halo. max.  
Black, 485B  
White, 485W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 485.



**Art. 481A**  
E27, 77W Halo. max.  
Black, 481A/B  
White, 481A/W



**Art. 493A**  
E27, 77W Halo. max.  
Black, 493A/B  
White, 493A/W

All London range.  
IP54, class II.  
Clear polycarbonate lens.


**Art. 484 and 485**  
square base- 16,5 cm. Distance  
between the two holes 9 cm.

**Art. 494**  
square base- 20 cm. Distance  
between the two holes 9 cm.


# LONDON




E27




**Art. 491**  
E27, 77W Halo. max.  
Black, 491B  
White, 491W




**Art. 492**  
E27, 2x77W Halo. max.  
Black, 492B  
White, 492W



**Art. 483**  
E27, 3x77W Halo. max.  
Black, 483B  
White, 483W



**Art. 482**  
E27, 2x77W Halo. max.  
Black, 482B  
White, 482W



**Art. 495**  
E27, 3x77W Halo. max.  
Black, 495B  
White, 495W

All London range.  
IP54, class II.  
Clear polycarbonate lens.

*Hexagonal foot. Distance  
between the three holes is  
20,5 cm.*

## Accessories

**Art. 305**  
Concreting anchor for  
London Range

**Art. 306**  
Anchoring support for  
London Range  
108




# MODENA




E27



MODENA FAMILY →




**Art. 351**  
E27, 77W Halo. max.  
Black, 351B  
White, 351W



**Art. 381**  
E27, 77W Halo. max.  
Black, 381B  
White, 381W



**Art. 350**  
E27, 77W Halo. max.  
Black, 350B  
White, 350W



**Art. 380**  
E27, 77W Halo. max.  
Black, 380B  
White, 380W

All Modena range.  
IP 54, class II.  
Supplied with lightly tinted polycarbonate lens

Part of Mondea range is  
available with LED.  
Contact your supplier for  
more information!



**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 351.  
Black, 152B  
White, 152W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 381.  
Black, 152B  
White, 152W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 350.  
Black, 152B  
White, 152W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 380.  
Black, 152B  
White, 152W








## MODENA



MODENA FAMILY →




**Art. 351A (chain)**  
E27, 77W Halo. max.  
Black, 351A/B  
White, 351A/W

**Art. 381A BIG (chain)**  
E27, 77W Halo. max.  
Black, 381A/B  
White, 381A/W




**Art. 300**  
E27, 77W Halo. max.  
Black, 300B  
White, 300W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 300



**Art. 384**  
E27, 77W Halo. max.  
Black, 384B  
White, 384W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 384




**Art. 304**  
E27, 77W Halo. max.  
Black, 304B  
White, 304W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 304


All Modena range.  
IP 54, class II.  
Supplied with lightly tinted  
polycarbonate lens

Part of Mondea range is  
available with LED.   
Contact your supplier for  
more information!


# MODENA




**Art. 301**  
E27, 77W Halo. max.  
Black, 301B  
White, 301W




**Art. 382**  
E27, 2x77W Halo. max.  
Black, 382B  
White, 382W



**Art. 303**  
E27, 3x77W Halo. max.  
Black, 303B  
White, 303W



**Art. 302**  
E27, 2x77W Halo. max.  
Black, 302B  
White, 302W



**Art. 397**  
E27, 3x77W Halo. max.  
Black, 397B  
White, 397W

All Modena range.  
IP 54, class II.  
Supplied with lightly tinted  
polycarbonate lens

Part of Mondea range is  
available with LED.   
Contact your supplier for  
more information!

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 301  
**Art. 306**  
Anchoring support  
for Art. 301

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 382  
**Art. 306**  
Anchoring support for  
Art. 382


**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 303  
**Art. 306**  
Anchoring support for  
Art. 303

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 302  
**Art. 306**  
Anchoring support for  
Art. 302


**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 397  
**Art. 306**  
Anchoring support for  
Art. 397



# BOLOGNA



**Art. 360**  
tinted globe.  
E27, 46W Halo max.  
Black, 360B  
White, 360W



**Art. 310**  
tinted globe.  
E27, 46W Halo max.  
Black, 310B  
White, 310W



**Art. 310A**  
tinted globe.  
E27, 46W Halo max.  
Black, 310A/B  
White, 310A/W

Bologna range.  
Globe: Clear tinted polycarbonate  
or opal polycarbonate globe.  
Class II, IP54.

## Accessories

### Art. 152

Corner bracket for  
Art. 360, 361, 310 and 311  
Black, 152B  
White, 152W

### Art. 361

opal globe.  
E27, 46W Halo max.  
Black, 361B  
White, 361W

### Art. 311




opal globe.  
E27, 46W Halo max.  
Black, 311B  
White, 311W

### Art. 311A,

opal globe.  
E27, 46W Halo max.  
Black, 311A/B  
White, 311A/W



## BOLOGNA



Bologna range.  
Globe: Clear tinted polycarbonate  
or opal polycarbonate globe.  
Class II, IP54.

### Accessories

**Art. 305**, Concreting anchor  
for Art. 362, 363, 364 and 365.

**Art. 306**, Anchoring support  
for Art. 362, 363, 364 and 365.

**Art. 307**  
Concreting anchor for  
Art. 312, 313, 314 and 315.

**Art. 312**  
tinted globe.  
E27, 46W Halo max.  
Black, 312B  
White, 312W

**Art. 313**,  
opal globe.  
E27, 46W Halo max.  
Black, 313B  
White, 313W

**Art. 314**  
tinted globe.  
E27, 46W Halo max.  
Black, 314B  
White, 314W

**Art. 315**  
opal globe.  
E27, 46W Halo max.  
Black, 315B  
White, 315W

**Art. 362**,  
tinted globe.  
E27, 2x46W Halo max.  
Black, 362B  
White, 362W



**Art. 363**,  
opal globe.  
E27, 2x46W Halo max.  
Black, 363B  
White, 363W

**Art. 364**  
tinted globe.  
E27, 3x46W Halo max.  
Black, 364B  
White, 364W

**Art. 365**  
opal globe.  
E27, 3x46W Halo max.  
Black, 365B  
White, 365W


**Art. 362, 363, 364 and 365** Hexagonal foot. 3 holes for anchoring. Distance between holes: 20,5 cm. (three bolts).  
**Art. 312, 313, 314 and 315** has a square feet 16,5 cm. Distance between the two bolt holes is 9 cm.

# COMO




**Art. 370**  
E27, 57W Halo. max.  
Black, 370B  
White, 370W

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 370.  
Black, 152B  
White, 152W




**Art. 375**  
E27, 57W Halo. max.  
Black, 375B  
White, 375W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 375




**Art. 371**  
E27, 57W Halo. max.  
Black, 371B  
White, 371W

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 371  
**Art. 306**  
Anchoring support for  
Art. 371



**Art. 372**  
E27, 2x57W Halo. max.  
Black, 372B  
White, 372W

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 372  
**Art. 306**  
Anchoring support for  
Art. 372



**Art. 373**  
E27, 3x57W Halo. max.  
Black, 373B  
White, 373W

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 373  
**Art. 306**  
Anchoring support for  
Art. 373

**Art. 371, 372 og 373:** Hexagonal foot. Distance between the three holes is 20,5 cm.  
**Art. 375:** Square base- 16,5 cm.Distance between the two holes 9 cm.




## FIRENZE




E27




**Art. 800A**  
E27, 57W Halo. max.  
Black, 800A/B  
White, 800A/W




**Art. 800**  
E27, 57W Halo. max.  
Black, 800B  
White, 800W




**Art. 805**  
E27, 57W Halo. max.  
Black, 805B  
White, 805W



**Art. 810**  
E27, 57W Halo. max.  
Black, 810B  
White, 810W



**Art. 820**  
E27, 2x57W Halo. max.  
Black, 820B  
White, 820W



**Art. 830**  
E27, 3x57W Halo. max.  
Black, 830B  
White, 830W

All Firenze range.  
IP54, class II.  
Lightly tinted  
polycarbonate.  
Opal polycarbonate  
on request.

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 800  
Black, 152B  
White, 152W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 805


**Accessories**  
**Art. 305**  
Concreting anchor for Art. 810, 820 and 830  
**Art. 306**  
Anchoring support for Art. 810, 820 and 830

**Art. 810, 811, 820:** Hexagonal foot. Distance between the three holes is 20,5 cm.  
**Art. 805:** Square base- 16,5 cm. Distance between the two holes 9 cm.

# RIMINI / MILANO



E27



Concerns Rimini/ Milano range.  
Glass: clear polycarbonate lens.  
Class II, IP 54.


Rimini range contains of art.  
259, 2591, 250, 402, 403 and 404.

Milano range contains of art. 401

**Art. 259**  
E27, 46W Halo max.  
Black, 259B  
White, 259W

**Accessories**  
**Art. 150**  
Corner bracket for  
Art. 259 and 2591


Black, 150B  
White, 150W



**Art. 2591**  
E27, 46W Halo max.  
Black, 2591B  
White, 2591W

**Accessories**  
**Art. 150**  
Corner bracket for  
Art. 259 and 2591

Black, 150B  
White, 150W




**Art. 250**  
E27, 46W Halo max.  
Black, 250B  
White, 250W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 250 and  
404.

# RIMINI / MILANO




E27




**Art. 404**  
E27, 46W Halo max.  
Black, 404B  
White, 404W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 250 and  
404.




**Art. 401**  
E27, 77W Halo max.  
Black, 401B  
White, 401W

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art.401  
**Art. 406**  
Anchoring support  
for Art. 401



**Art. 402**  
E27, 2x46W Halo max.  
Black, 402B  
White, 402W

**Accessories**  
**Art. 405**  
Concreting anchor for  
Art.402  
**Art. 406**  
Anchoring support  
for Art. 402



**Art. 403**  
E27, 3x46W Halo max.  
Black, 403B  
White, 403W


**Accessories**  
**Art. 405**  
Concreting anchor  
for Art.403  
**Art. 406**  
Anchoring support for  
Art. 403

Rimini/ Milano range.  
Glass: clear polycarbonate lens.  
Class II, IP 54.


Rimini range contains of art. 259,  
259I, 250, 402, 403 og 404.

Milano range contains of art. 401


## ACCESSORIES FOR NORLYS LAMPS




**Art. 150**  
Corner  
bracket  
Rimini




**Art. 152**  
Corner  
bracket  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze



**Art. 153**  
Corner bracket  
Stockholm  
Oslo  
Lund  
Bergen  
Karlstad  
Vansbro




**Art. 156**  
Corner bracket  
Helsinki  
(Only 880, 882,  
883)




**Art. 158**  
Corner bracket  
Helsinki  
Koster


## ACCESSORIES FOR NORLYS LAMPS




**Art. 205**  
Concreting anchor  
Halmstad bollard  
Stockholm bollard  
Alta Bollard  
Scandinavian wood




**Art. 206**  
Anchoring support  
Halmstad bollard  
Stockholm bollard  
Alta Bollard  
Scandinavian wood




**Art. 307**  
Concreting  
anchor  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 305**  
Concreting  
anchor  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 306**  
Anchoring support  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 505**  
Concreting  
anchor  
Narvik




**Art. 405**  
Concreting anchor  
Stockholm  
Oslo  
Lund  
Rimini/Milano  
Koster  
Helsinki




**Art. 406**  
Anchoring support  
Stockholm  
Oslo  
Lund  
Rimini/Milano  
Koster  
Helsinki




**Art. 1128**  
Concreting anchor  
Oslo 245  
Arvika 890-897  
Stockholm 285, 287




**Art. 1230**  
Concreting anchor  
Stavanger




**Art. 1231**  
Anchoring support  
Stavanger




**Art. 1906**  
Reinforced galvanized  
metal foot for Molde



**Art. 1907**  
Concreting anchor  
Molde




**Art. 1908**  
Anchoring support  
Molde

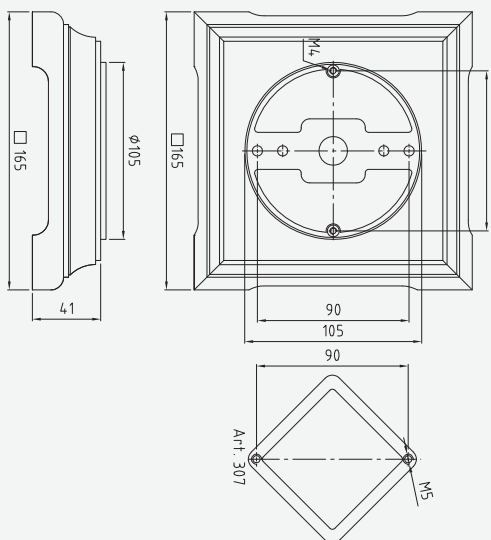

#### Dimensions of base art.

|         |     |
|---------|-----|
| Bologna | 312 |
| Bologna | 313 |
| Bologna | 314 |
| Bologna | 315 |
| Chelsea | 956 |
| Chelsea | 957 |
| Como    | 375 |
| Firenze | 805 |
| London  | 484 |
| London  | 485 |
| Modena  | 300 |
| Modena  | 304 |


(165mm)

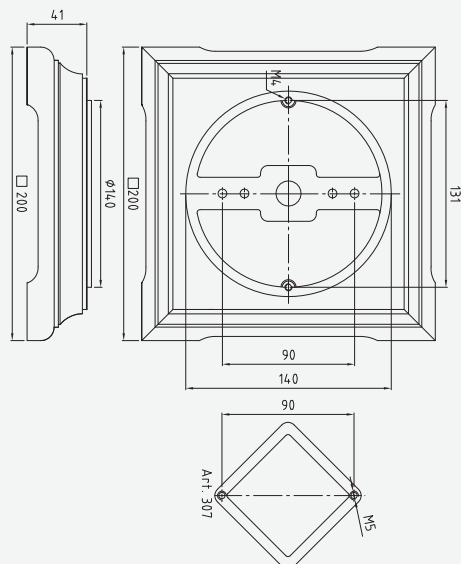

#### Dimensions of base art.


|        |     |
|--------|-----|
| London | 494 |
| Modena | 384 |

(200mm)

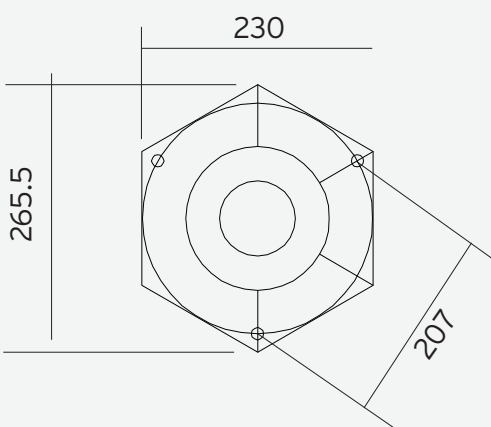

#### Dimensions of base art.

|         |     |
|---------|-----|
| Bologna | 362 |
| Bologna | 363 |
| Bologna | 364 |
| Bologna | 365 |
| Chelsea | 951 |
| Chelsea | 953 |
| Como    | 371 |
| Como    | 372 |
| Como    | 373 |
| Firenze | 810 |
| Firenze | 820 |
| Firenze | 830 |
| London  | 482 |
| London  | 483 |
| London  | 491 |
| London  | 492 |
| Mondena | 301 |
| Mondena | 302 |
| Mondena | 303 |
| Mondena | 382 |

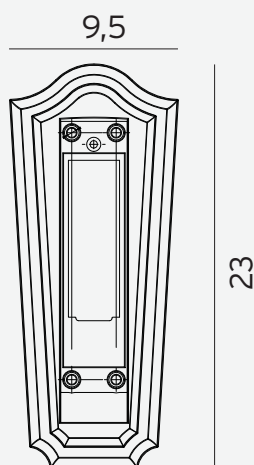

#### Dimensions of wall bracket

|         |     |
|---------|-----|
| Bologna | 310 |
| Bologna | 311 |
| Bologna | 360 |
| Bologna | 361 |
| Chelsea | 954 |
| Chelsea | 960 |
| Como    | 370 |
| Firenze | 800 |
| London  | 480 |
| London  | 481 |
| London  | 490 |
| London  | 493 |
| Modena  | 350 |
| Modena  | 351 |
| Modena  | 380 |
| Modena  | 381 |



Norlys AS  
P.B 1014 Hoff, 0218 Oslo  
Hovfaret 4, 0275 Oslo  
Tel. +47 24 12 40 10  
Fax. +47 24 12 40 11  
[www.norlys.no](http://www.norlys.no)  
E-mail: [firmapost@norlys.no](mailto:firmapost@norlys.no)