

M7

Micro 48V Track
System



KClighring


M7
Micro 48V Track
System



M7


Micro 48V Track

M7 is a complete system with tracks for different applications in order to meet all the technical and design needs.

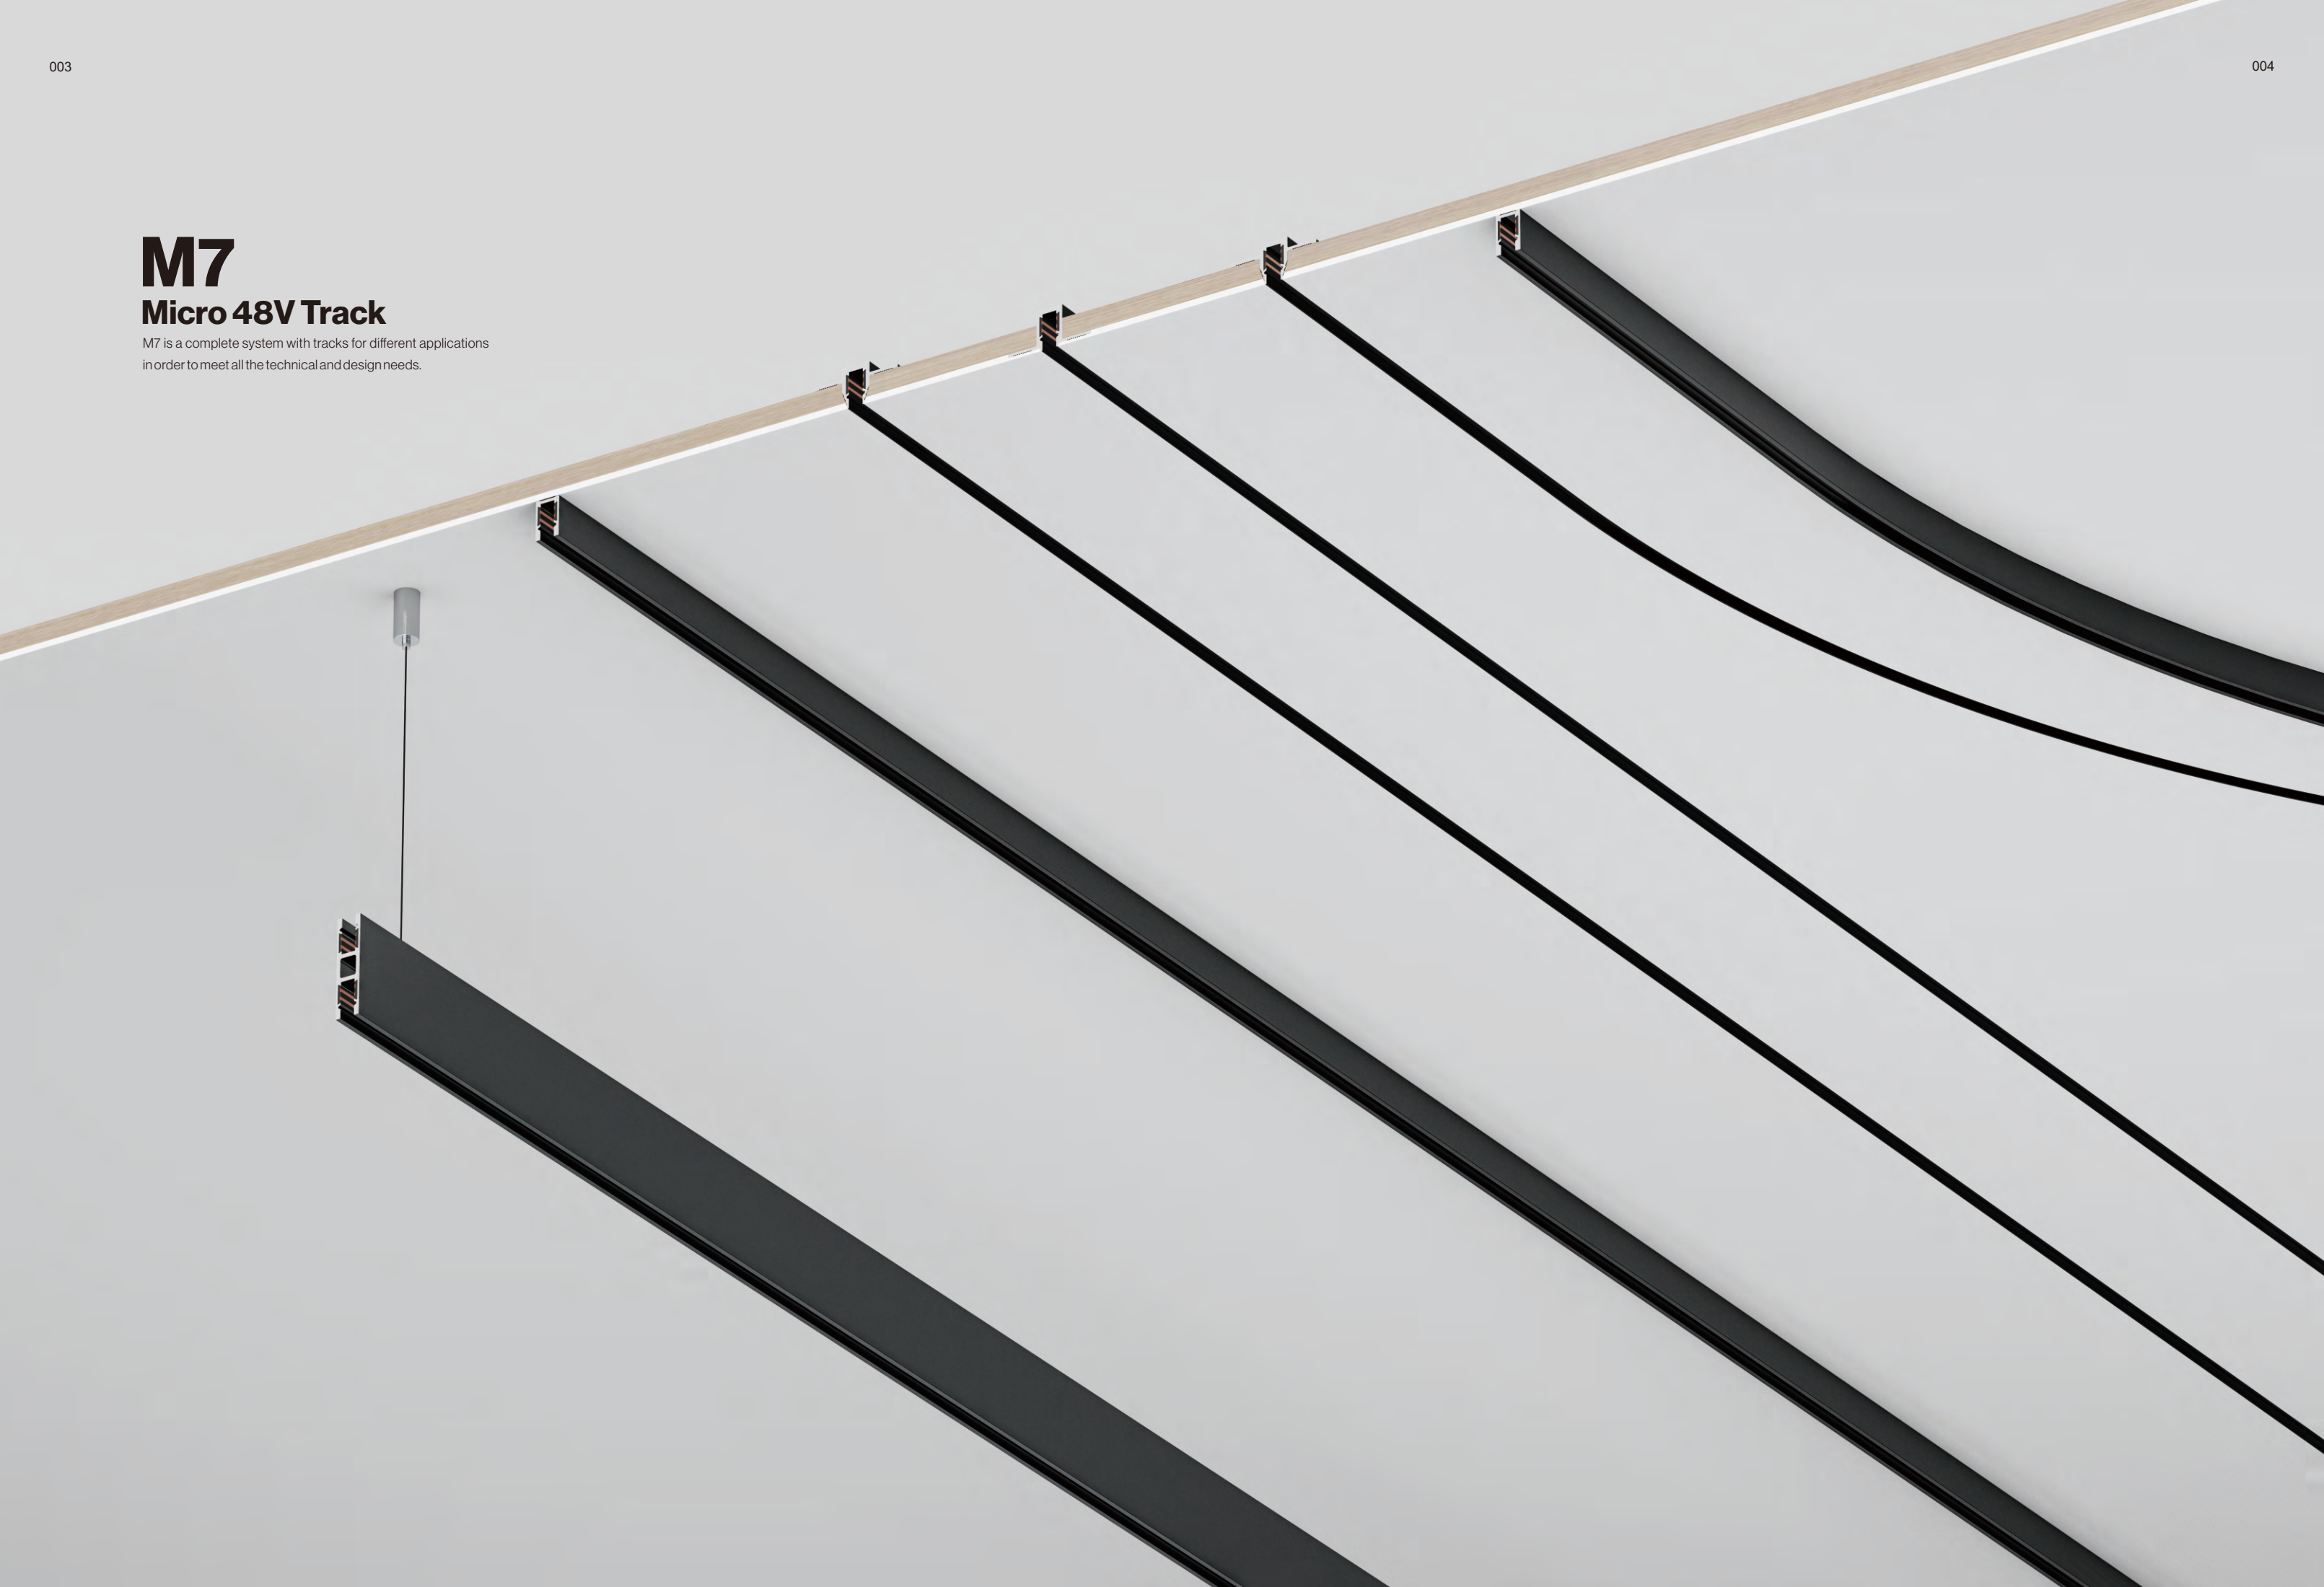

Only 7mm

Ultra-compact, ultra-thin size, and minimalist design: M7 is a new micro-track system, only 7 millimeters, suitable for surface mounting, pendant lights, and frameless lighting solutions.

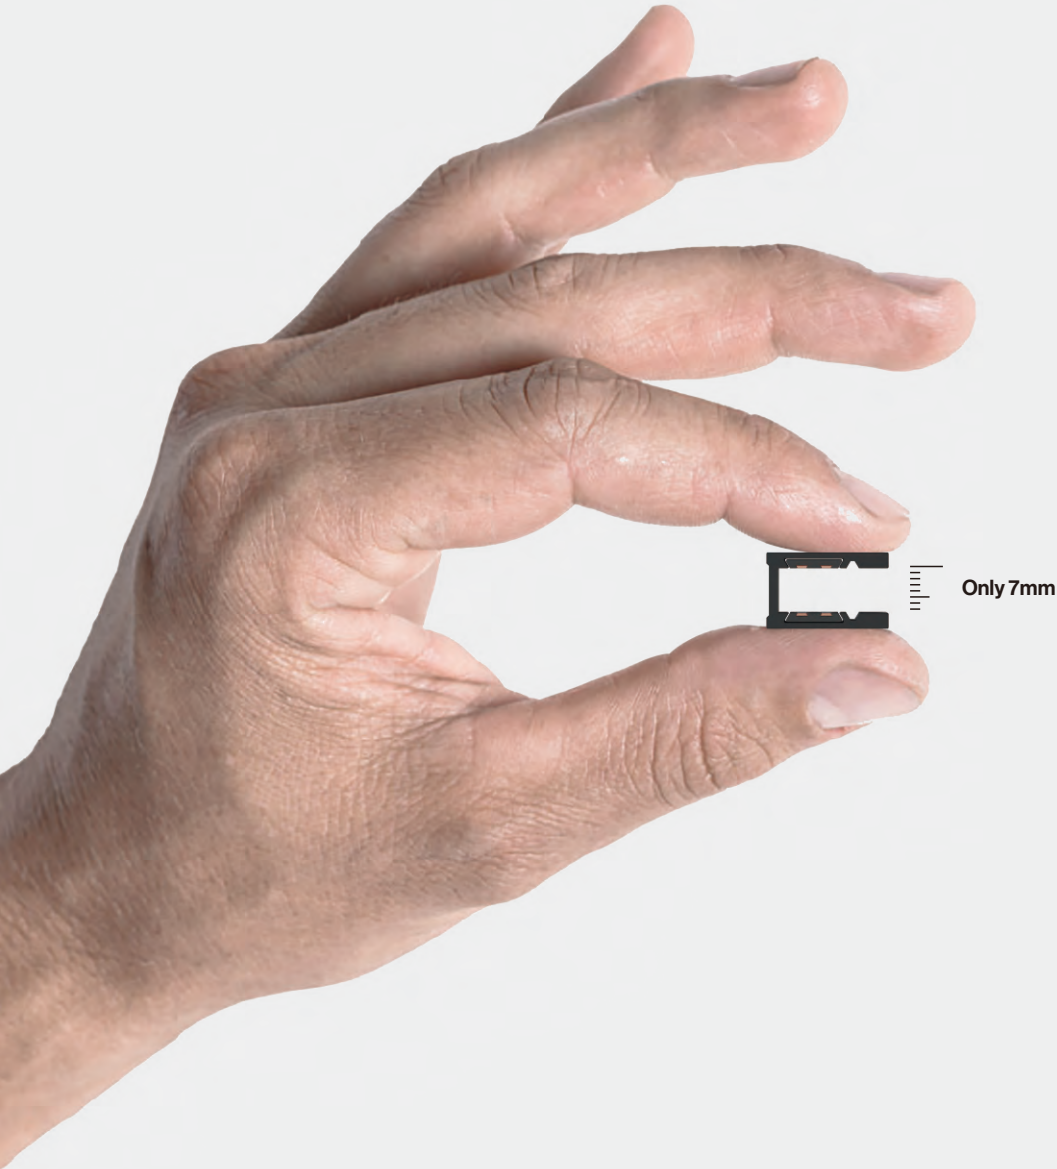

Notice
For other colours, please consult us.

M7

Micro 48V Track System

Each module and point can be individually managed via the Casambi App or DALI control.



M7 Micro 48V TrackSystem



Different control options to meet any need.

- PWM
 - Circuit dimming
 - Can be comptable with Phase dim,
 - Dali dim.
 - DALI 2
 - Individual control of each fixture.
- CASAMBI
 - Control each fixture directly and individually via a tablet or smartphone app.

The Casambi app allows you to control the system, fixtures, lighting scenes, and programs either individually or in groups.

Through traditional electrical devices and Bluetooth connectivity, you can fully control the ambiance.

Compatible with iOS and Android.

CASAMBI


Available on the App Store

GET IT ON Google Play










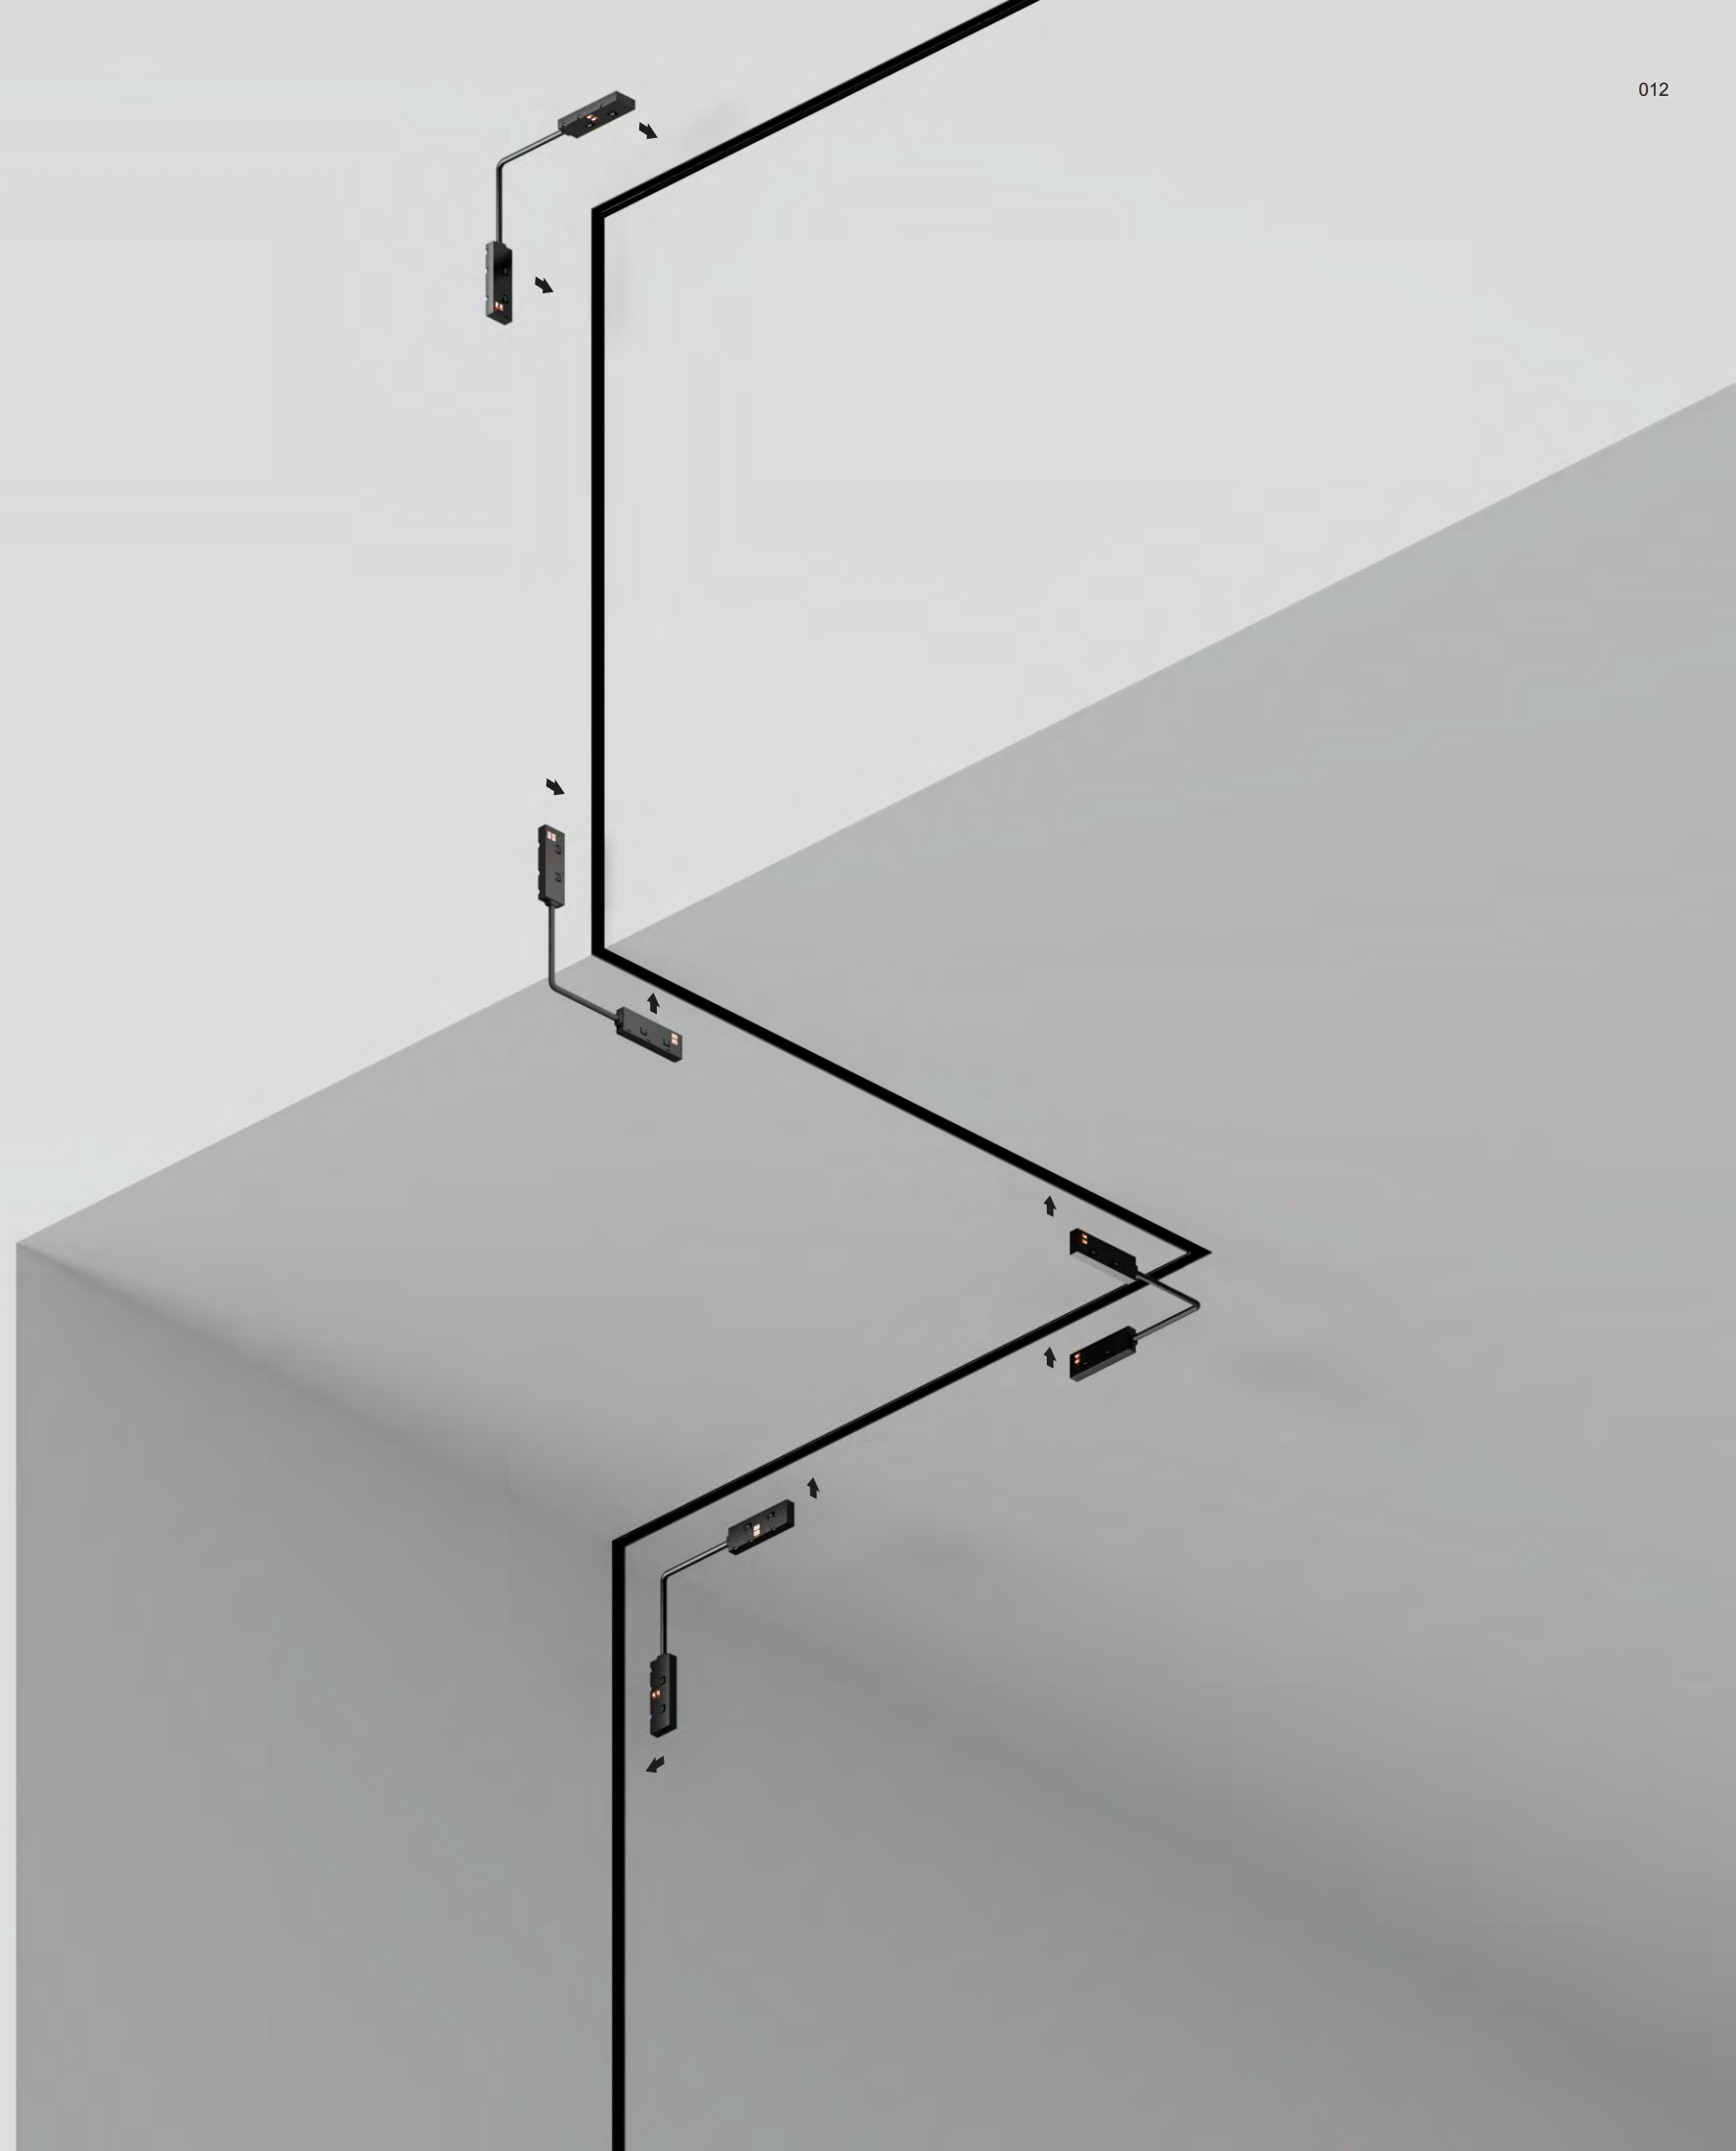








inset single control via Casambi app












M7

Micro 48V Track
Flexible & Versatile




Contents


M7 Track			
			
M7A 017	M7E 017	M7T 018	M7H 018
Slash			
			
SS0006 036			
Slit			
			
			
			
SL0006 042	SL0110 042	SL0215 042	
Pan			
			
			
			
PA0004 049	PA0106 049	PA0210 050	
Pivot 160			
			
			
			
PV0004 057	PV0106 057	PV0215 058	
IT22			
			
IT28			
			
IT35			
			
IT0003 068	IT0105 072	IT0208 076	
IT30			
			
IT0305 086			

Pot			
	PO0015 092	PO0220 092	
TO50			
	TO0006 096		
Mars			
	MR0006 100		
TO80			
	TO0110 106	TO0210 106	
TO60			
	TO0308 112		
Pablo S			
	PS0003 118	PS0106 118	
Basilisk			
	BL0006 124	BL1010 130	

Roller




RL0006
136




RL0108
136

Cubilux




CB0006
142




CB0110
142


Lotus



LT0005
149




LT0208
149




LT0415
150

Lotus




LT0107
154




LT0314
154


Lotus



LT1005
159




LT1208
159




LT1415
160

Lotus




LT1107
166




LT1314
166

Cone




CN0010
170

Nod




ND0015
178



ND0120
178


016

Marmar




MM0008
182


Luna




LN0005
189



LN0107
189




LN1005
190




LN1107
190

Mino

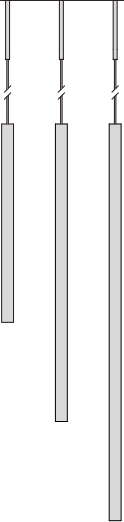


MN0006/MN0106/MN0206
197

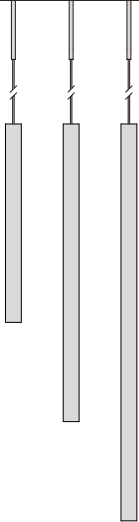


MN0410/MN0510/MN0610
198


Soar




SR0001
204




SR0101
204




SR1001
208



SR1101
208



SR2001
212





SR2101
212




M7A

Surface




M07A10
17.M07A10000



M07A20
17.M07A20000




M07A30
17.M07A30000

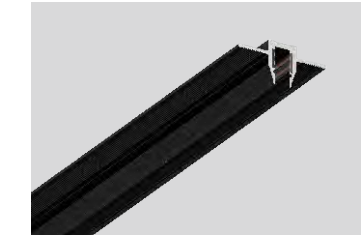

M7E

Trimless

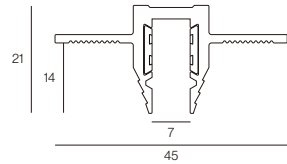


M07E10
17.M07E10000



M07E20
17.M07E20000





M07E30
17.M07E30000




M7T

Trimless



M07T10
17.M07T10000



M07T20
17.M07T20000





M07T30
17.M07T30000




M7H


Suspended

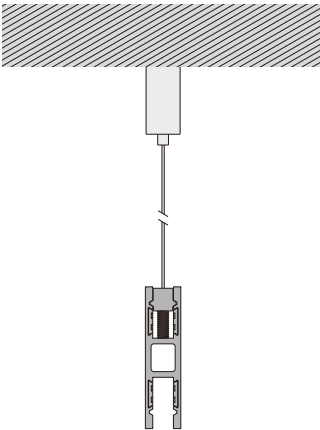


M07H10
17.M07H10000




M07H14
17.M07H14000



M07H20
17.M07H20000




M07H30
17.M07H30000




M7A-Curved Track


Surface




- A M7A-Curved Track
C90° R300
M07AC0
17.M07AC0690




- B M7A-Curved Track
C45° R800
M07AC1
17.M07AC1645

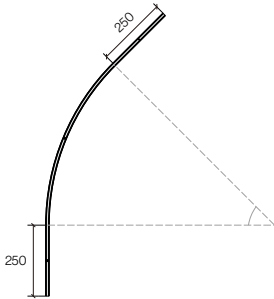

- C M7A-Curved Track
C90° R800
M07AC2
17.M07AC1690




- D M7A-Curved Track
C180° R800
M07AC3
17.M07AC1618

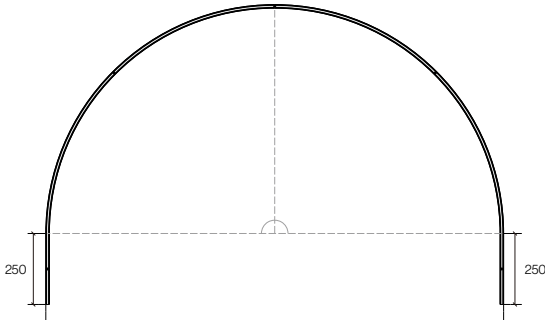


M7E-Curved Track


Trimless




- A M7E-Curved Track
C90° R300
M07EC0
17.M07EC0690




- B M7E-Curved Track
C45° R800
M07EC1
17.M07EC1645




- C M7E-Curved Track
C90° R800
M07EC2
17.M07EC1690



- D M7E-Curved Track
C180° R800
M07EC3
17.M07EC1618

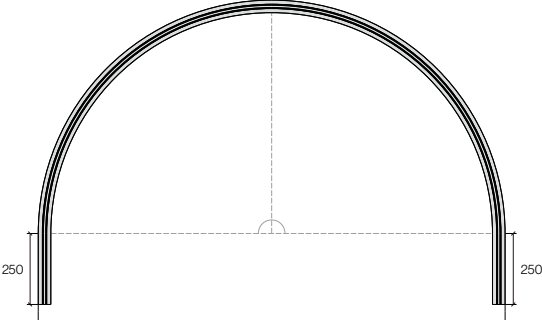

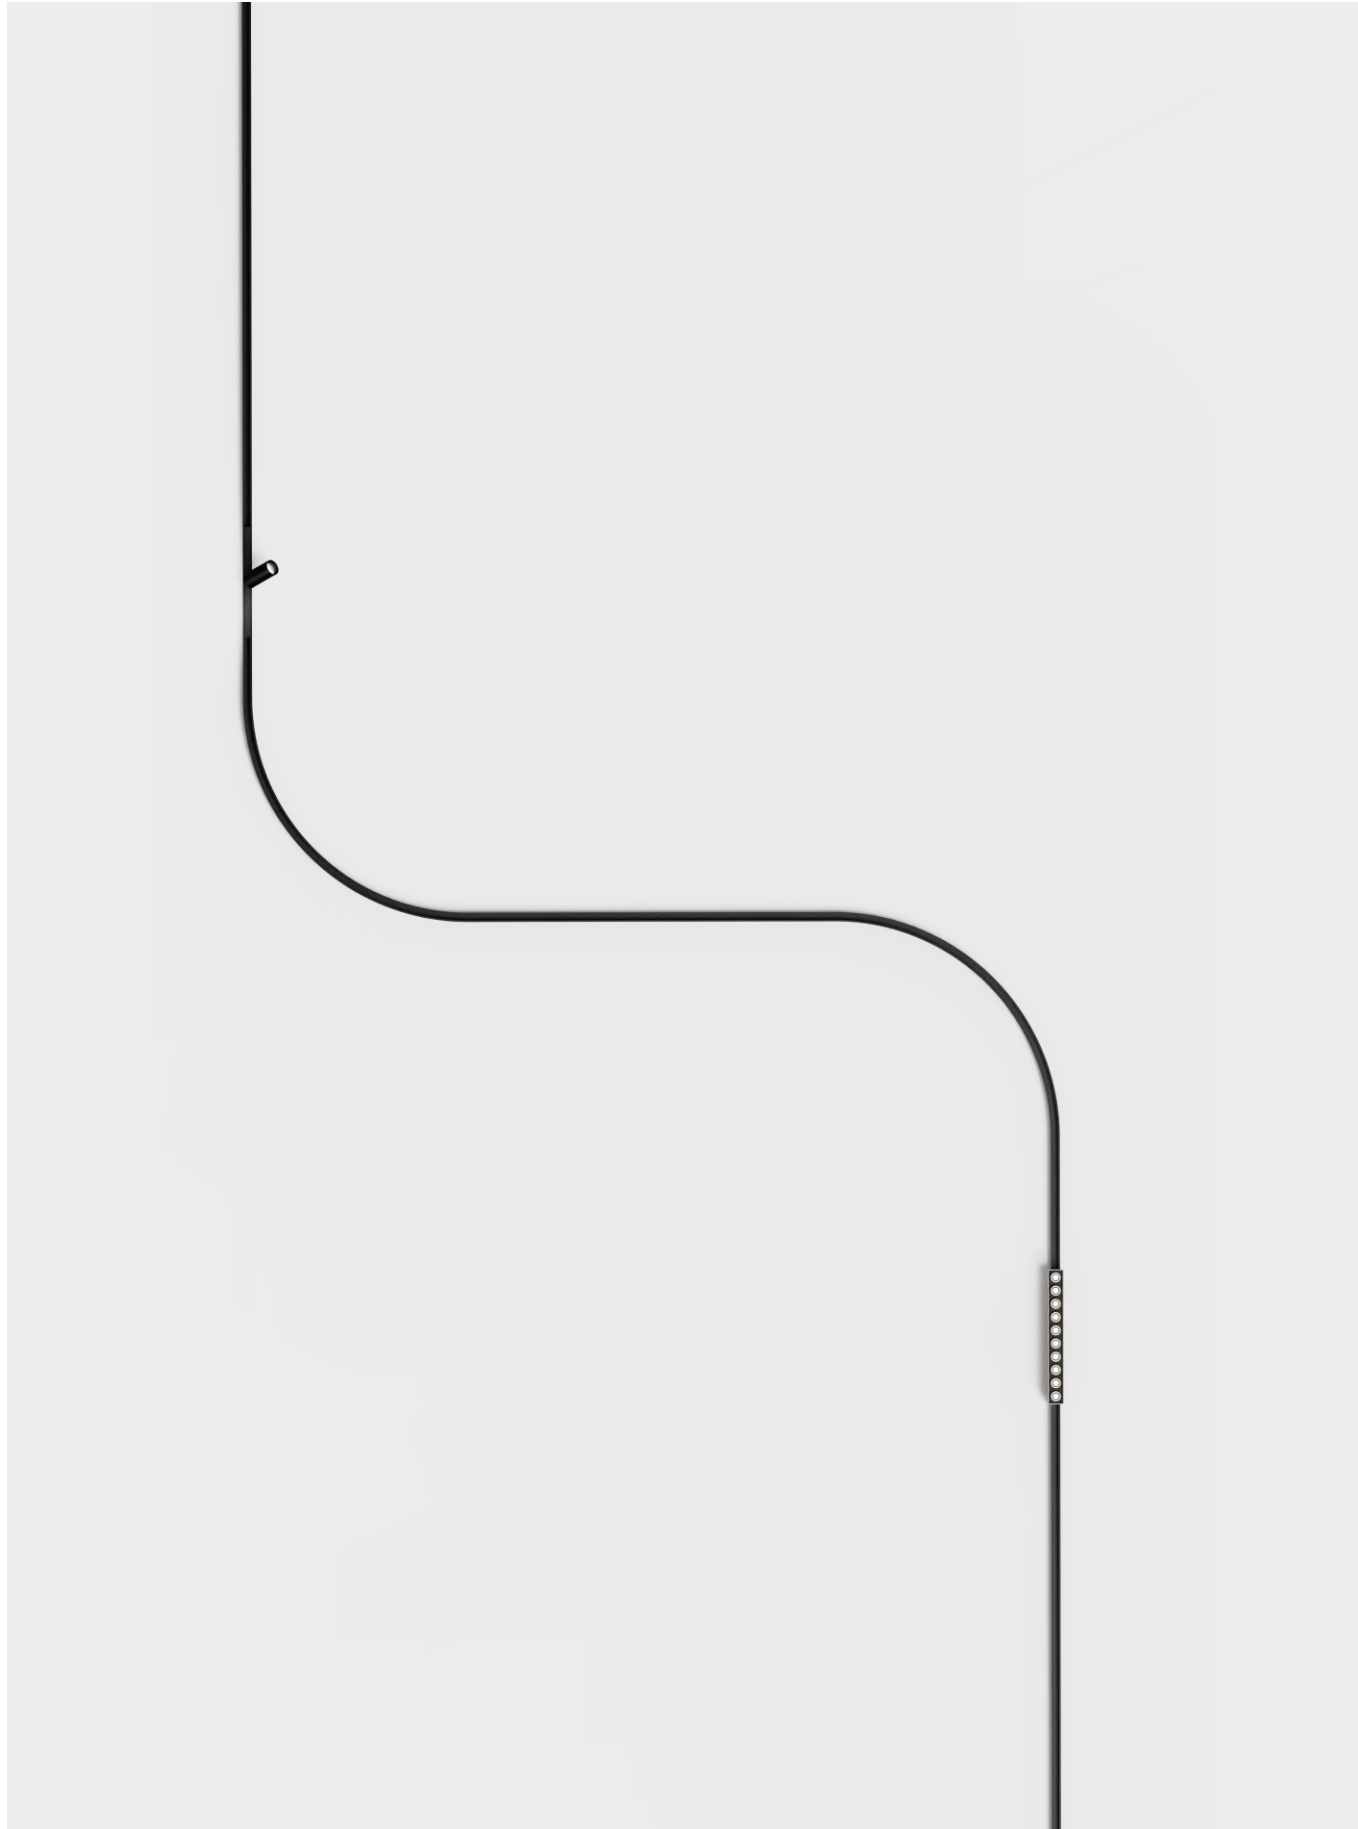

M7 Curved Track




The M7 system stands out with its flexible track design, which can be installed in embedded or surface-mounted ways, and is suitable for 48V track applications. This design allows the track to bend easily, making it perfect for complex building structures and custom layouts, giving users creative freedom. Whether it's curved ceilings, irregular walls, or unique spaces, the M7's curved track fits perfectly, creating smooth and attractive lighting solutions. The M7 system also offers 6 color finishes to suit different design styles, combining both functionality and aesthetics.

M7A Track

Surface

IP20

DC 48V

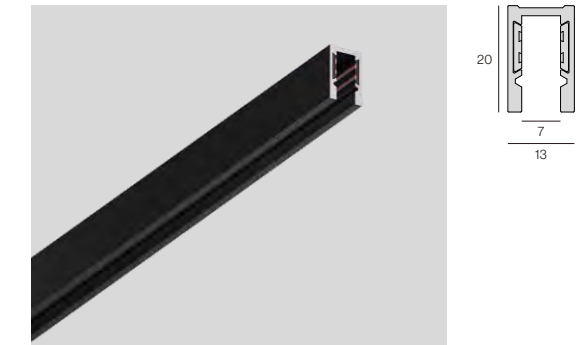

Data				
Model No.	Code No.	Length(mm)	Finishes	Code
M07A10	17.M07A10000	1000	White	○ F04
M07A20	17.M07A20000	2000	Black	● F09
M07A30	17.M07A30000	3000		

Track Accessories

M07L05
17.M07L04000

M07L06
17.M07L05000

M07AH0
17.M07AH9000

M07AV0
17.M07AV9000

M07AE0
17.M07AE9000

M07L01
17.M07L01000


M07L03
17.M07L03000

M07L04
17.M07L03H00

M07L16
17.M07L16000

Notice
For other colors, please consult us.

Material | AL | PC

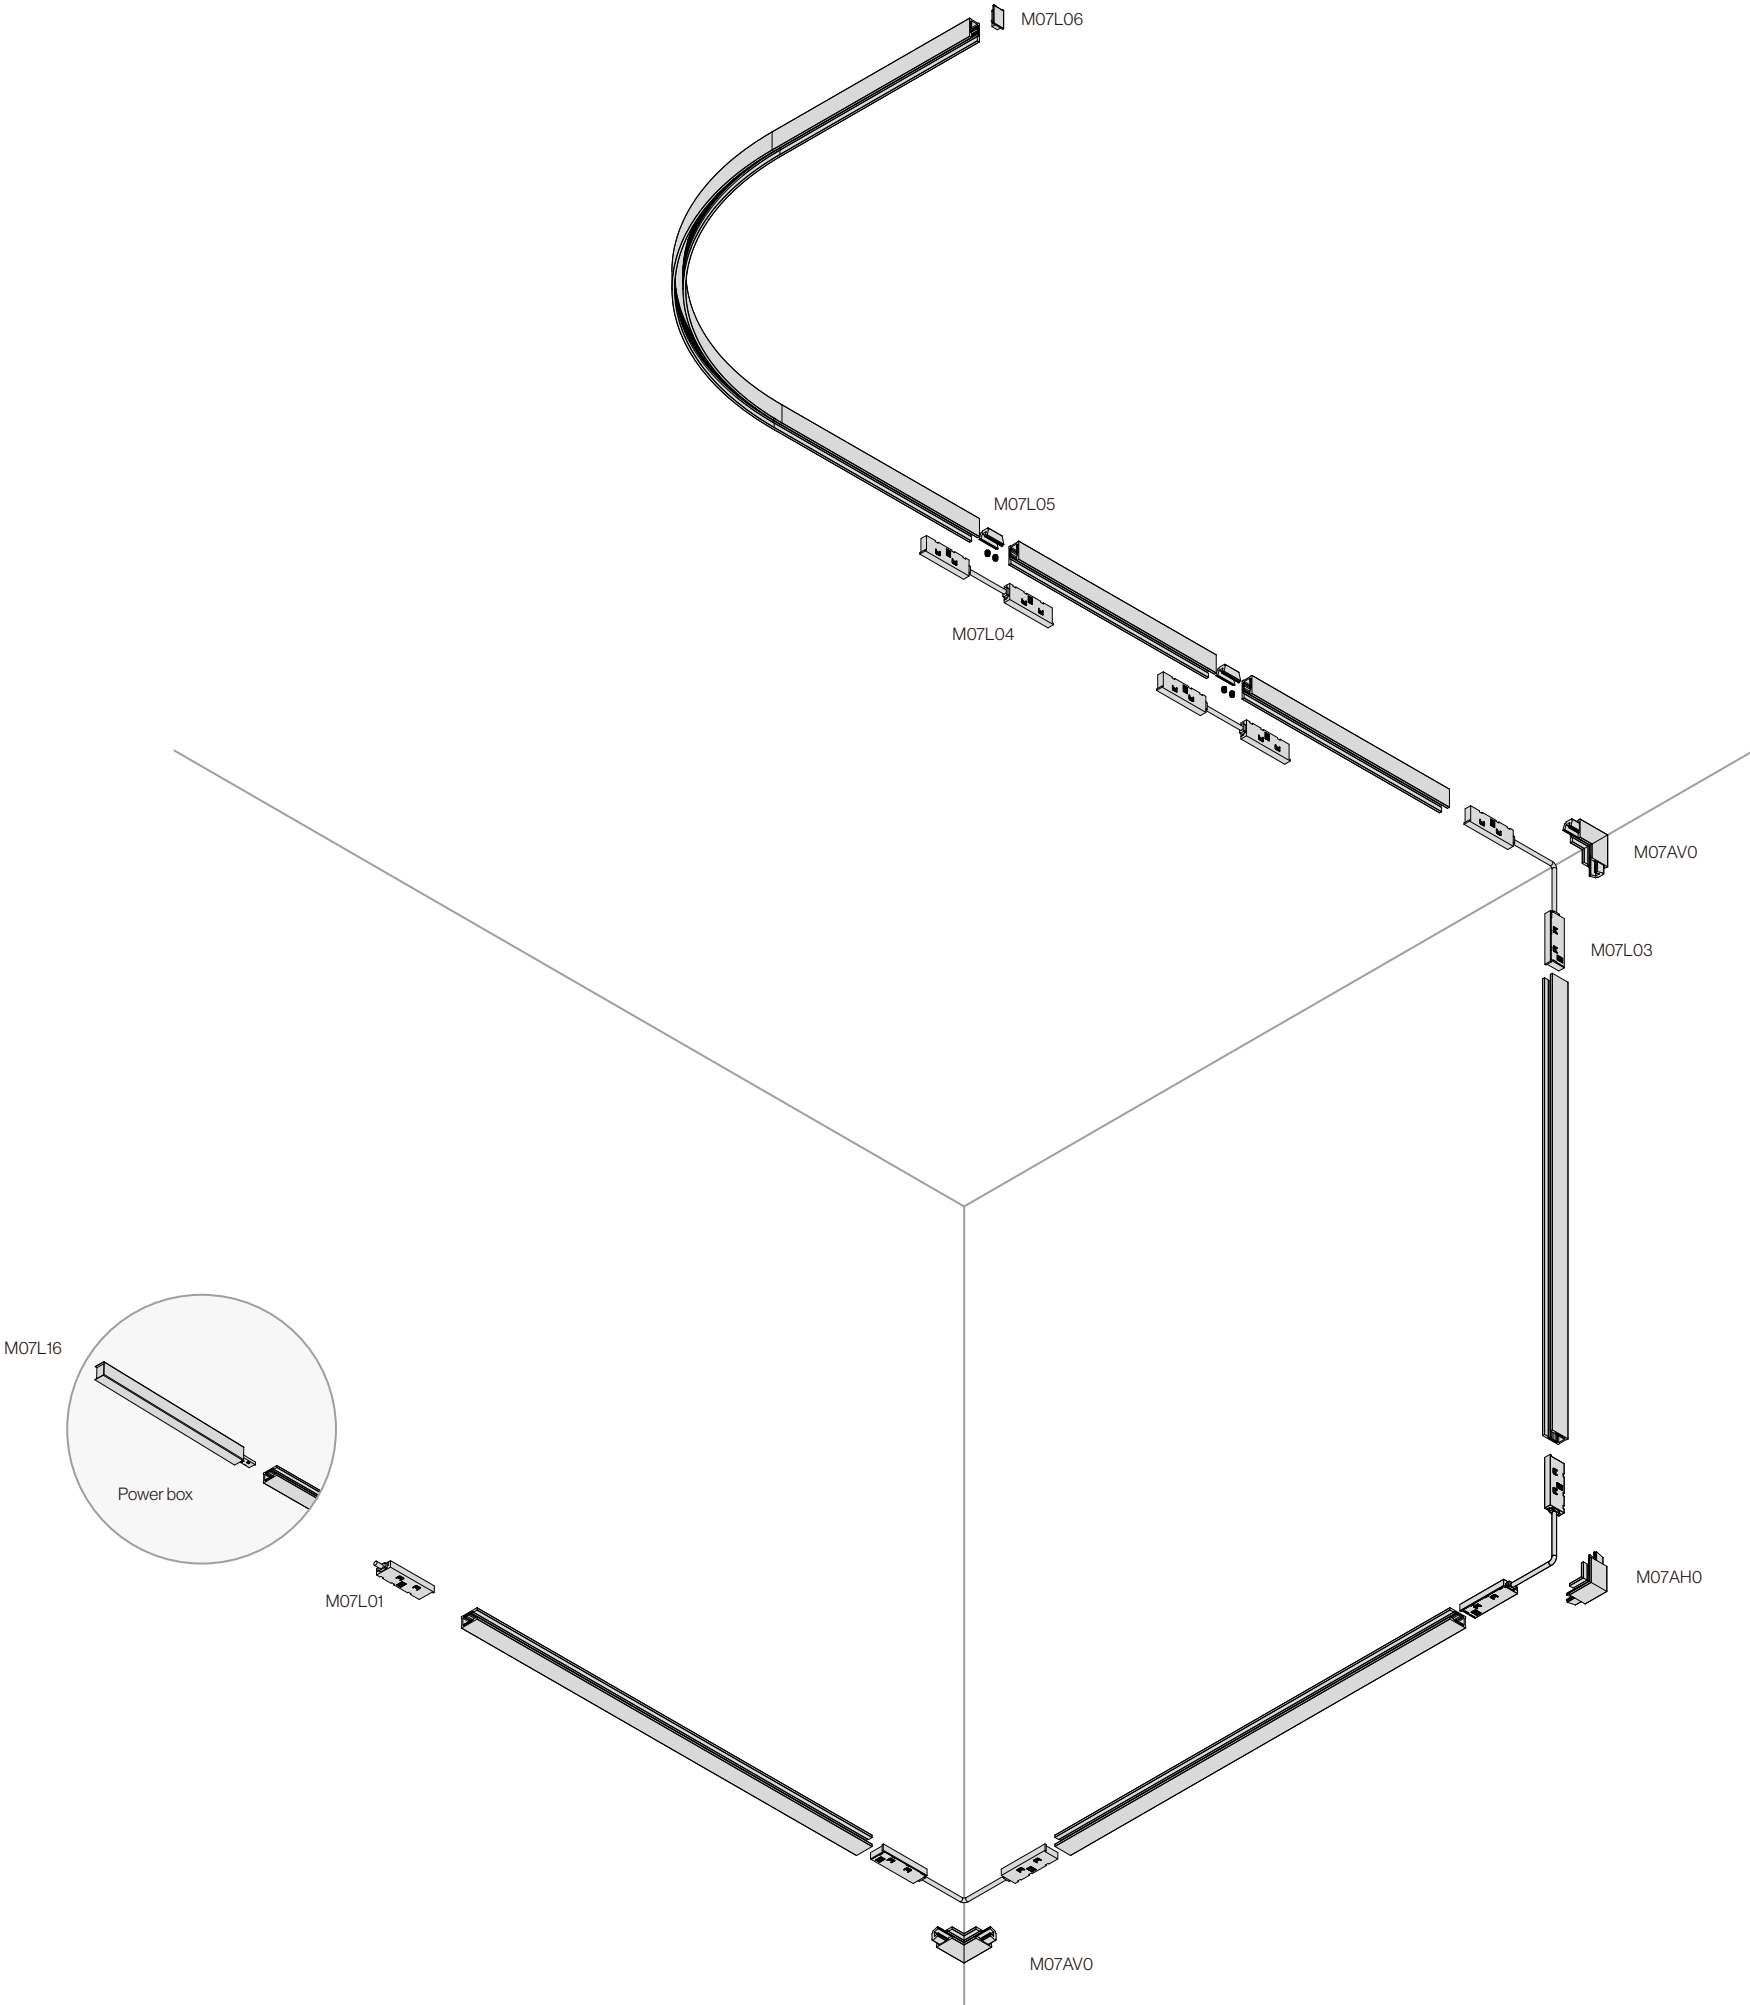


M7E Track

Trimless

IP20

DC
48V

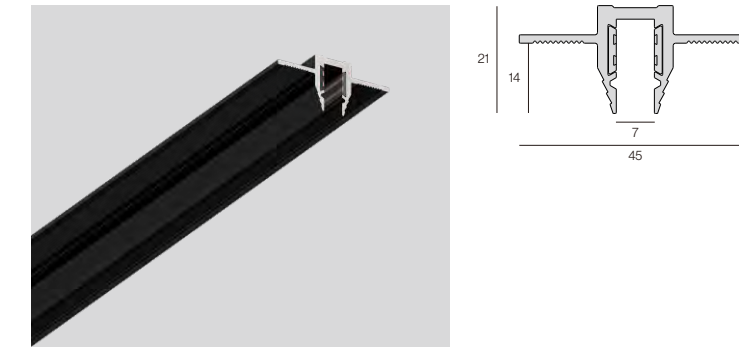

Data				
Model No.	Code No.	Length(mm)	Finishes	Code
M07E10	17.M07E10000	1000	White	○ F04
M07E20	17.M07E20000	2000	Black	● F09
M07E30	17.M07E30000	3000		

Track Accessories


22
M07L05
17.M07L04000
5
M07L06
17.M07L05000

50 50
M07EH0
17.M07EH9000
36 36
M07EV0
17.M07EV9000
36 36
M07EE0
17.M07EE9000

500 56
M07L01
17.M07L01000
80 56
M07L03
17.M07L03000
35 56
M07L04
17.M07L03H00

Notice
For other colors, please consult us.

Material | AL | PC

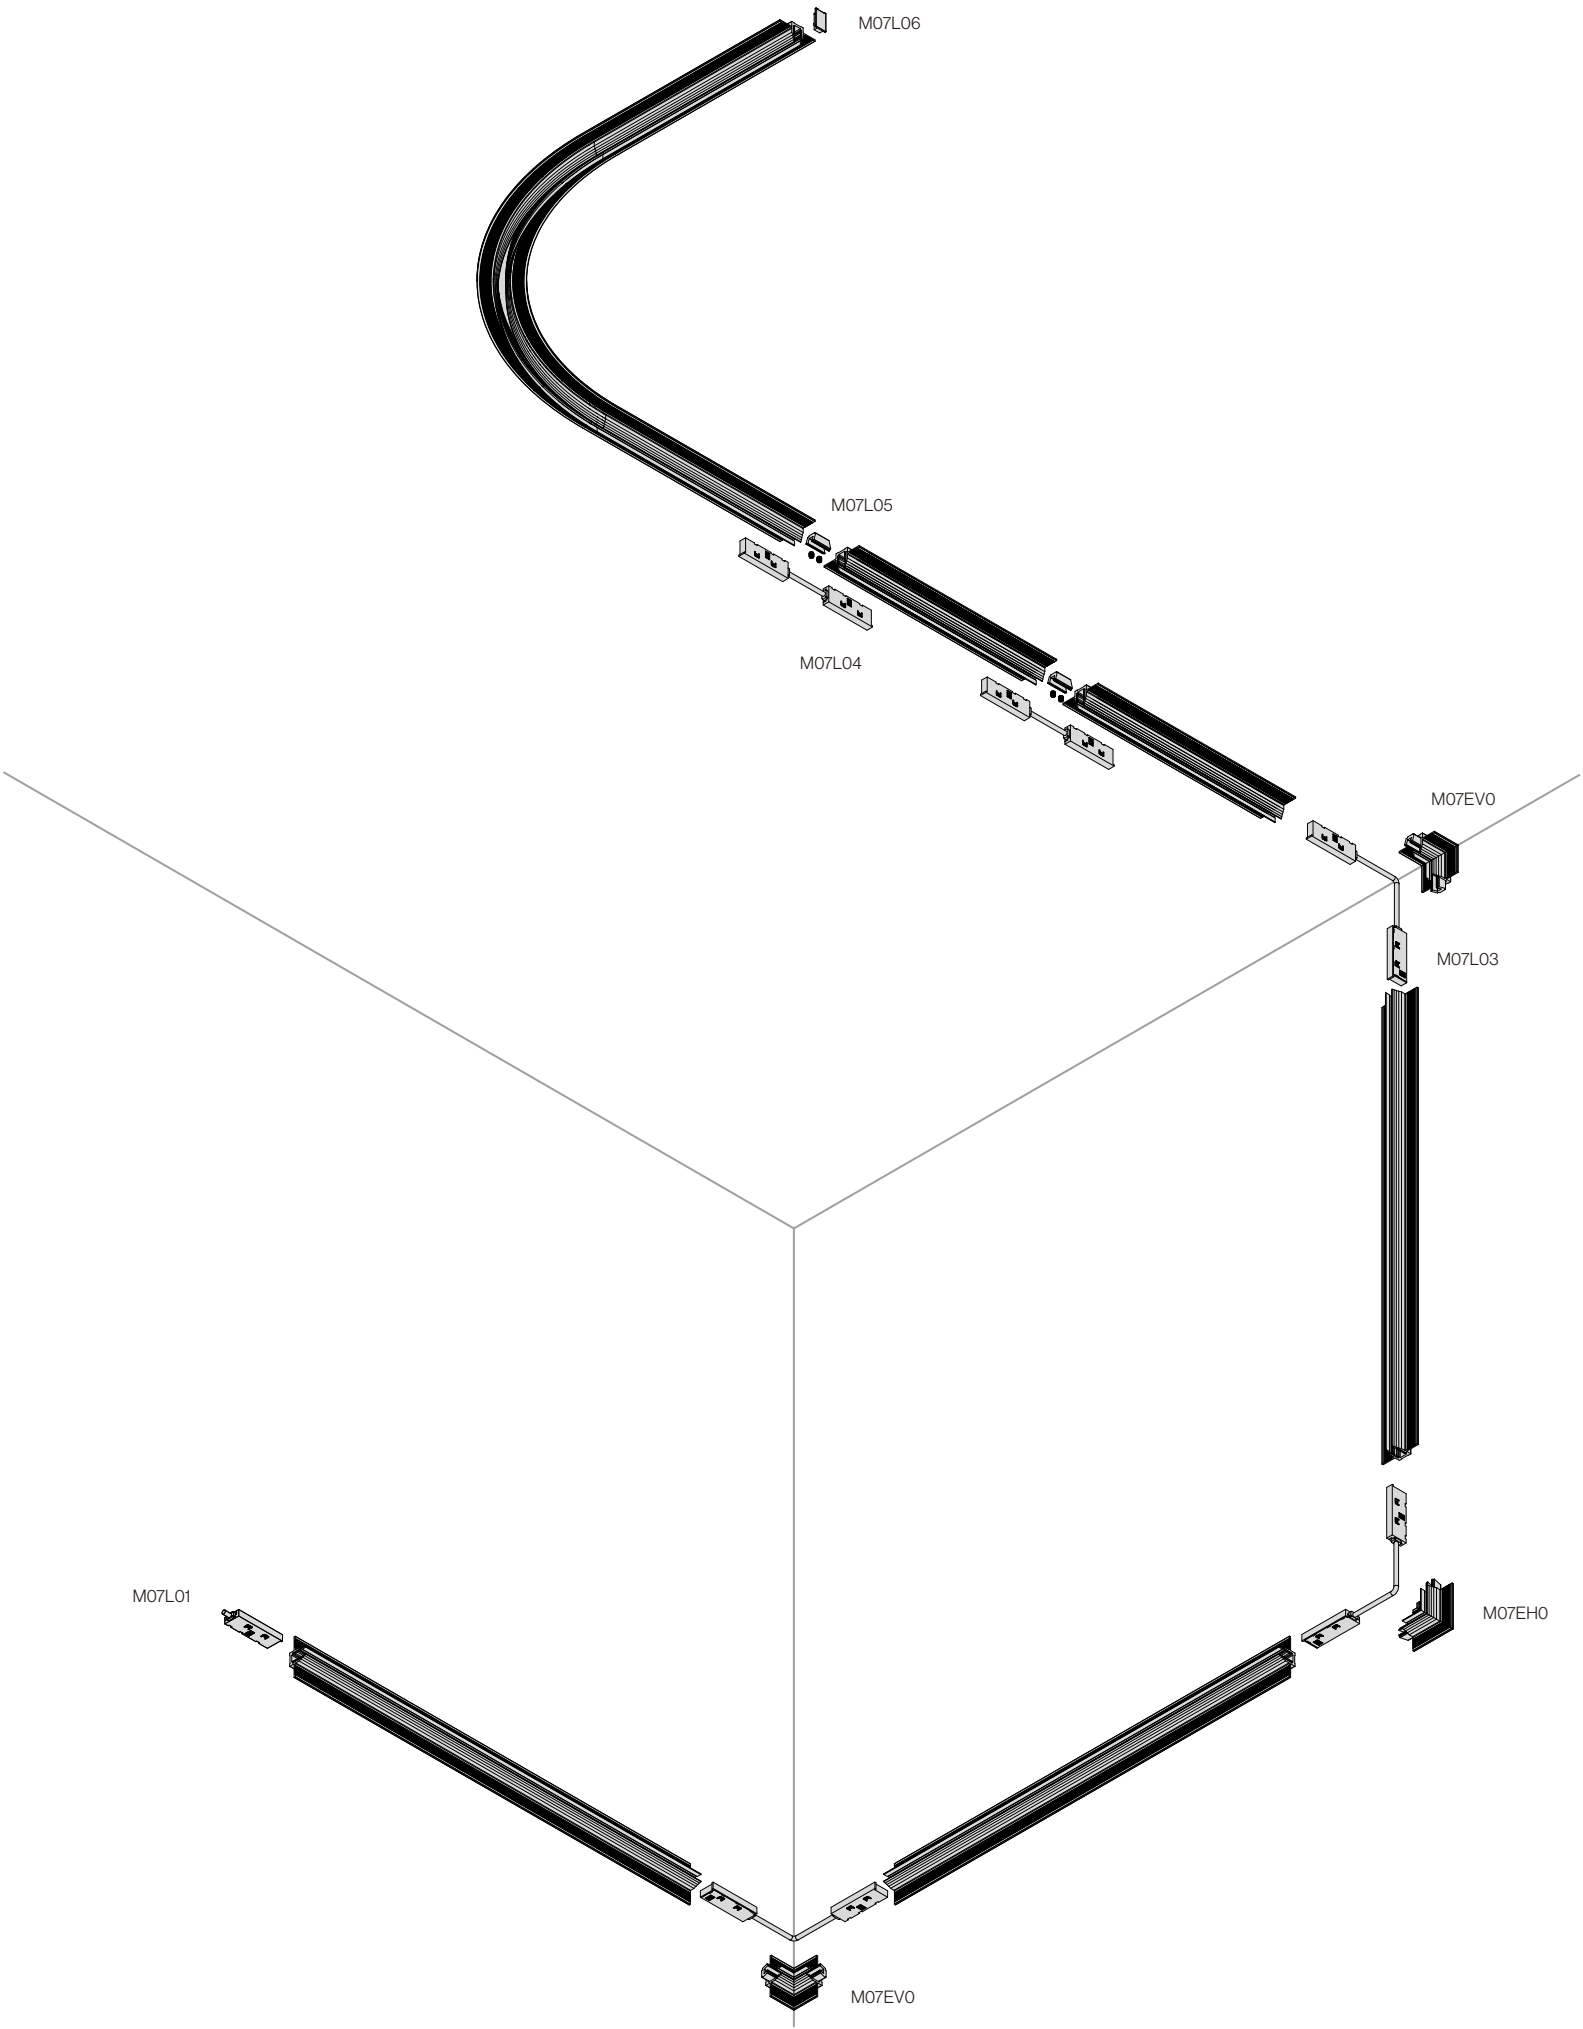


M7T Track

Trimless


IP20


DC 48V

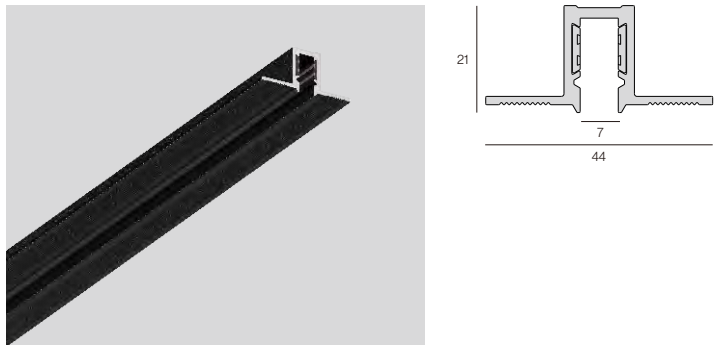



Data				
Model No.	Code No.	Length(mm)	Finishes	Code
M07T10	17.M07T10000	1000	White	○ F04
M07T20	17.M07T20000	2000	Black	● F09
M07T30	17.M07T30000	3000		


Track Accessories



22
M07L05
17.M07L04000



5
M07L06
17.M07L05000



49 49
M07TH0
17.M07TH9000


36 36
M07TV0
17.M07TV9000


36 36
M07TE0
17.M07TE9000



500 56
M07L01
17.M07L01000


80 56
M07L03
17.M07L03000


35 56
M07L04
17.M07L03H00

Notice
For other colors, please consult us.

Material | AL | PC

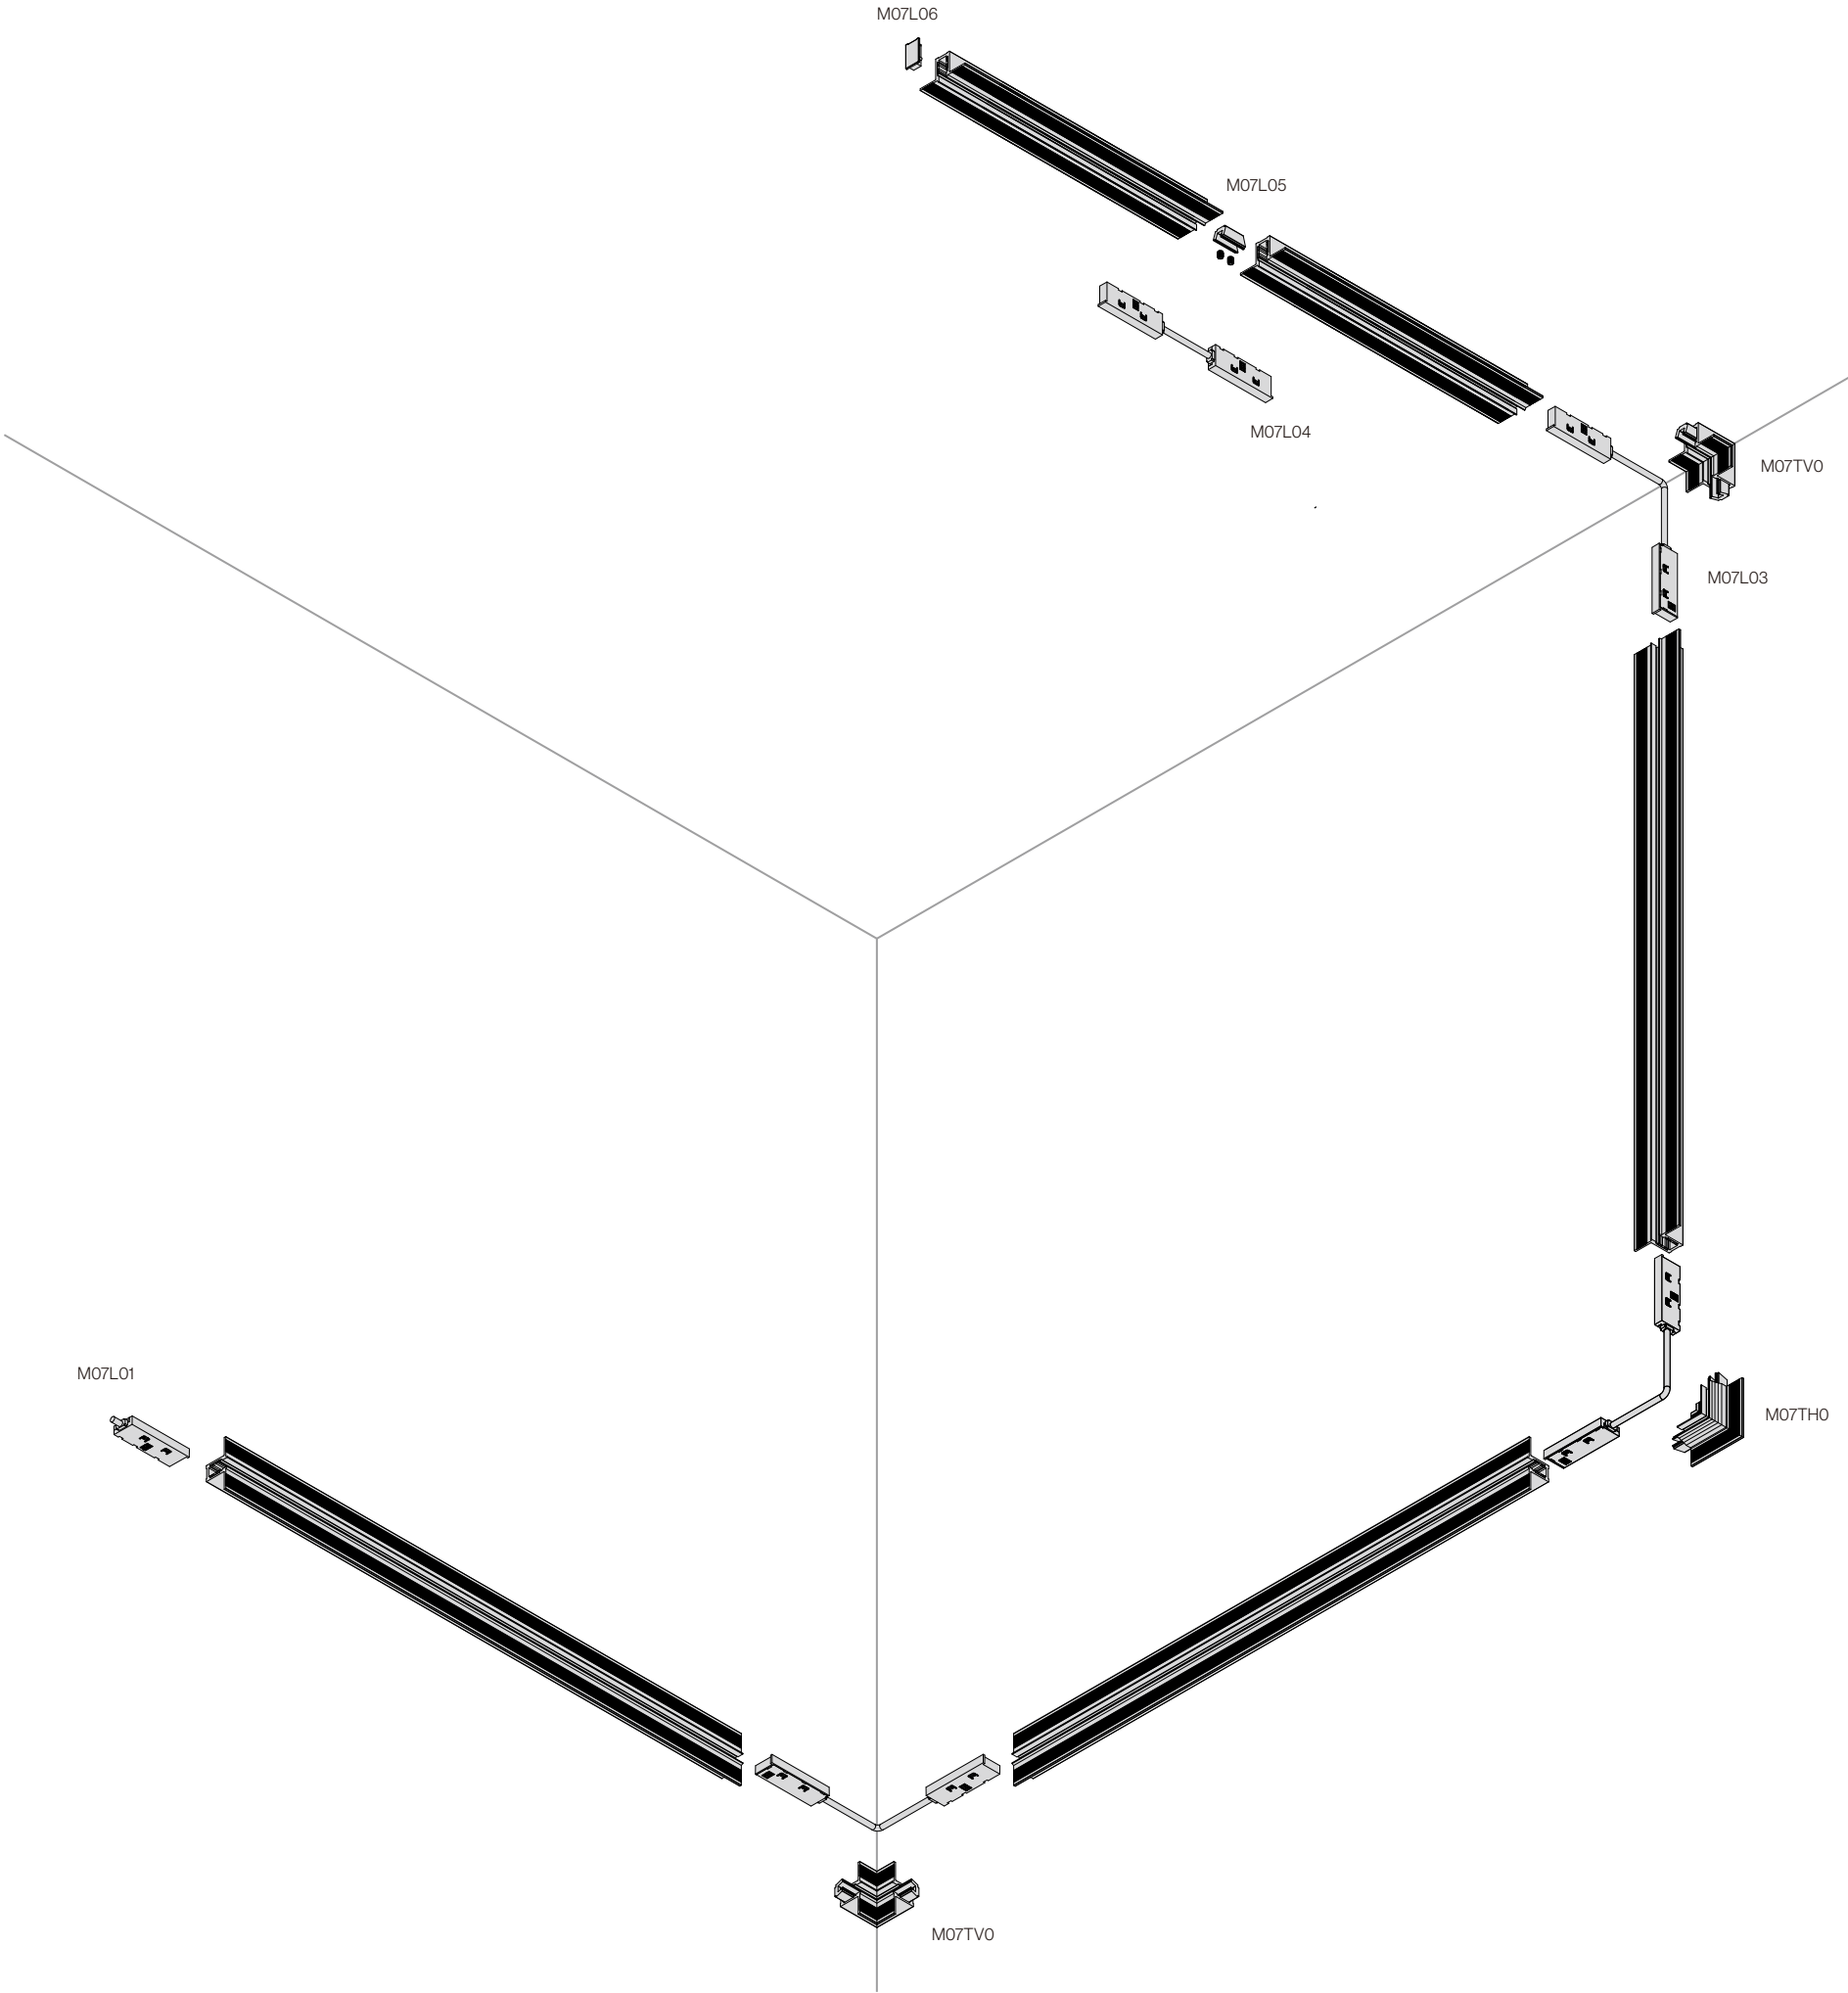

M7H Track



Suspended

IP20

 III


DC
48V


 DALI2

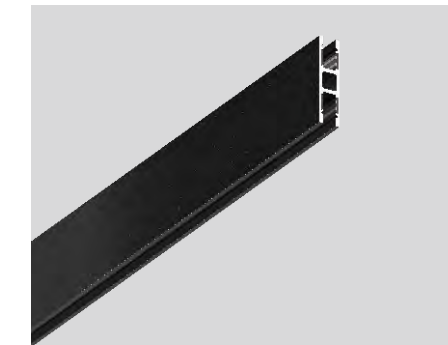



Data				
Model No.	Code No.	Length(mm)	Finishes	Code
M07H14	17.M07H14000	1400	White	○ F04
M07H10	17.M07H10000	1000	Black	● F09
M07H20	17.M07H20000	2000		
M07H30	17.M07H30000	3000		

Track Accessories


M07L07
17.M07L05H00



M07L08
17.M07L06H00
L:2000


M07L04
17.M07L03H00
35 56





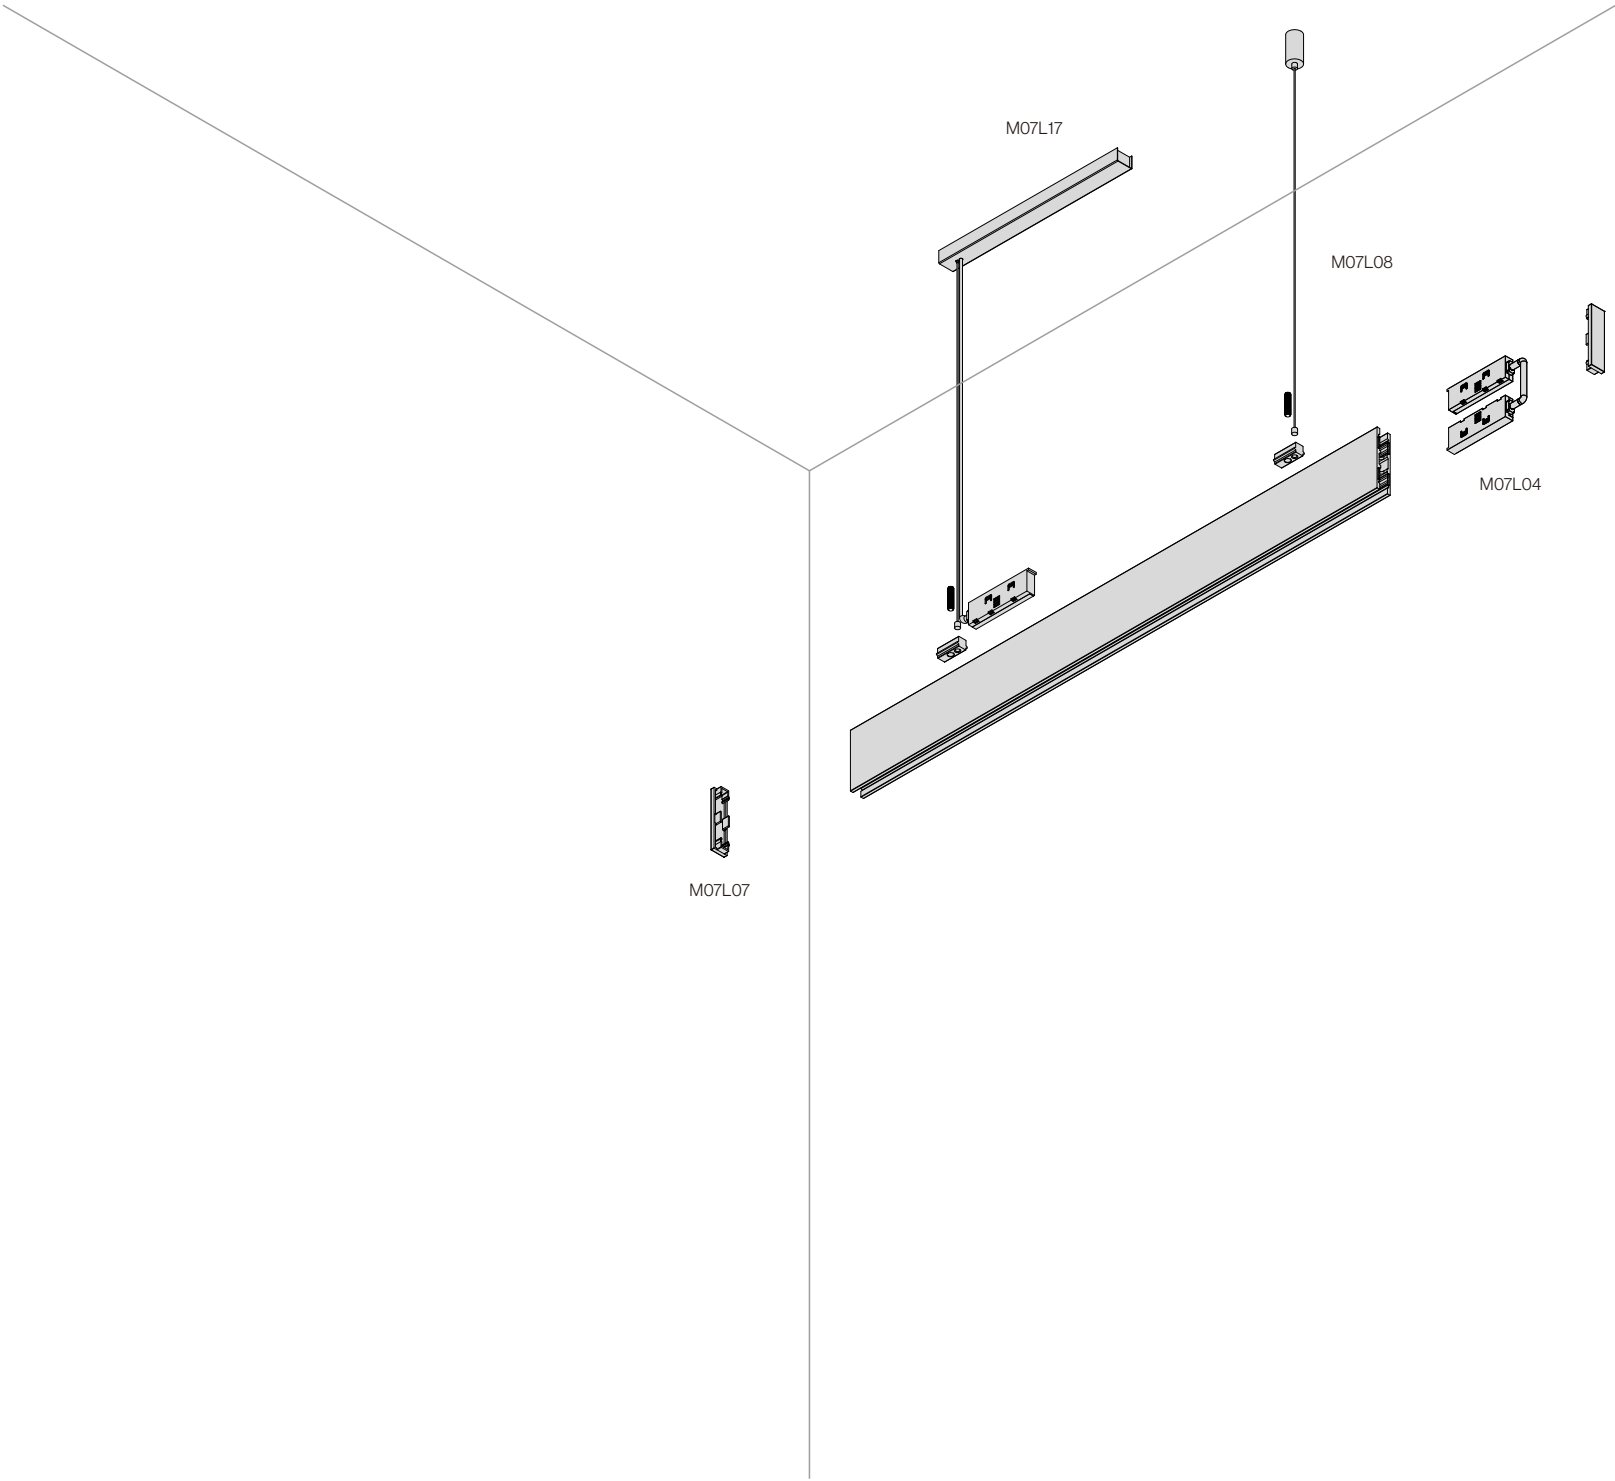



M07L17
17.M07L16H00
36 28 433 2000

Notice
For other colors, please consult us.







Material |  AL |  PC



M7A

Color		
Finishes		
	F04 White	
Special Finishes		
	Y09 Gold	
		
	Y08 Chrome	
		
	Y07 Brushed Anthracite	
	Y10 Brushed Silver	

M7H


Color		
Finishes		
	F04 White	
Special Finishes		
	Y09 Gold	
		
	Y07 Brushed Anthracite	
	Y10 Brushed Silver	



M7

Micro 48V Track System

To create a specific ambiance and attract customers, commercial spaces like malls, stores, hotels, and restaurants have high demands for lighting effects and design. Embedded mini-lights can be customized and arranged according to different commercial scenes. For instance, embedded mini-spotlights can be installed in display cases and shop windows in malls to highlight product features and textures, while embedded light strips can be installed in hotel lobbies and corridors to enhance the overall sense of luxury and comfort, making them widely used in commercial space decoration.

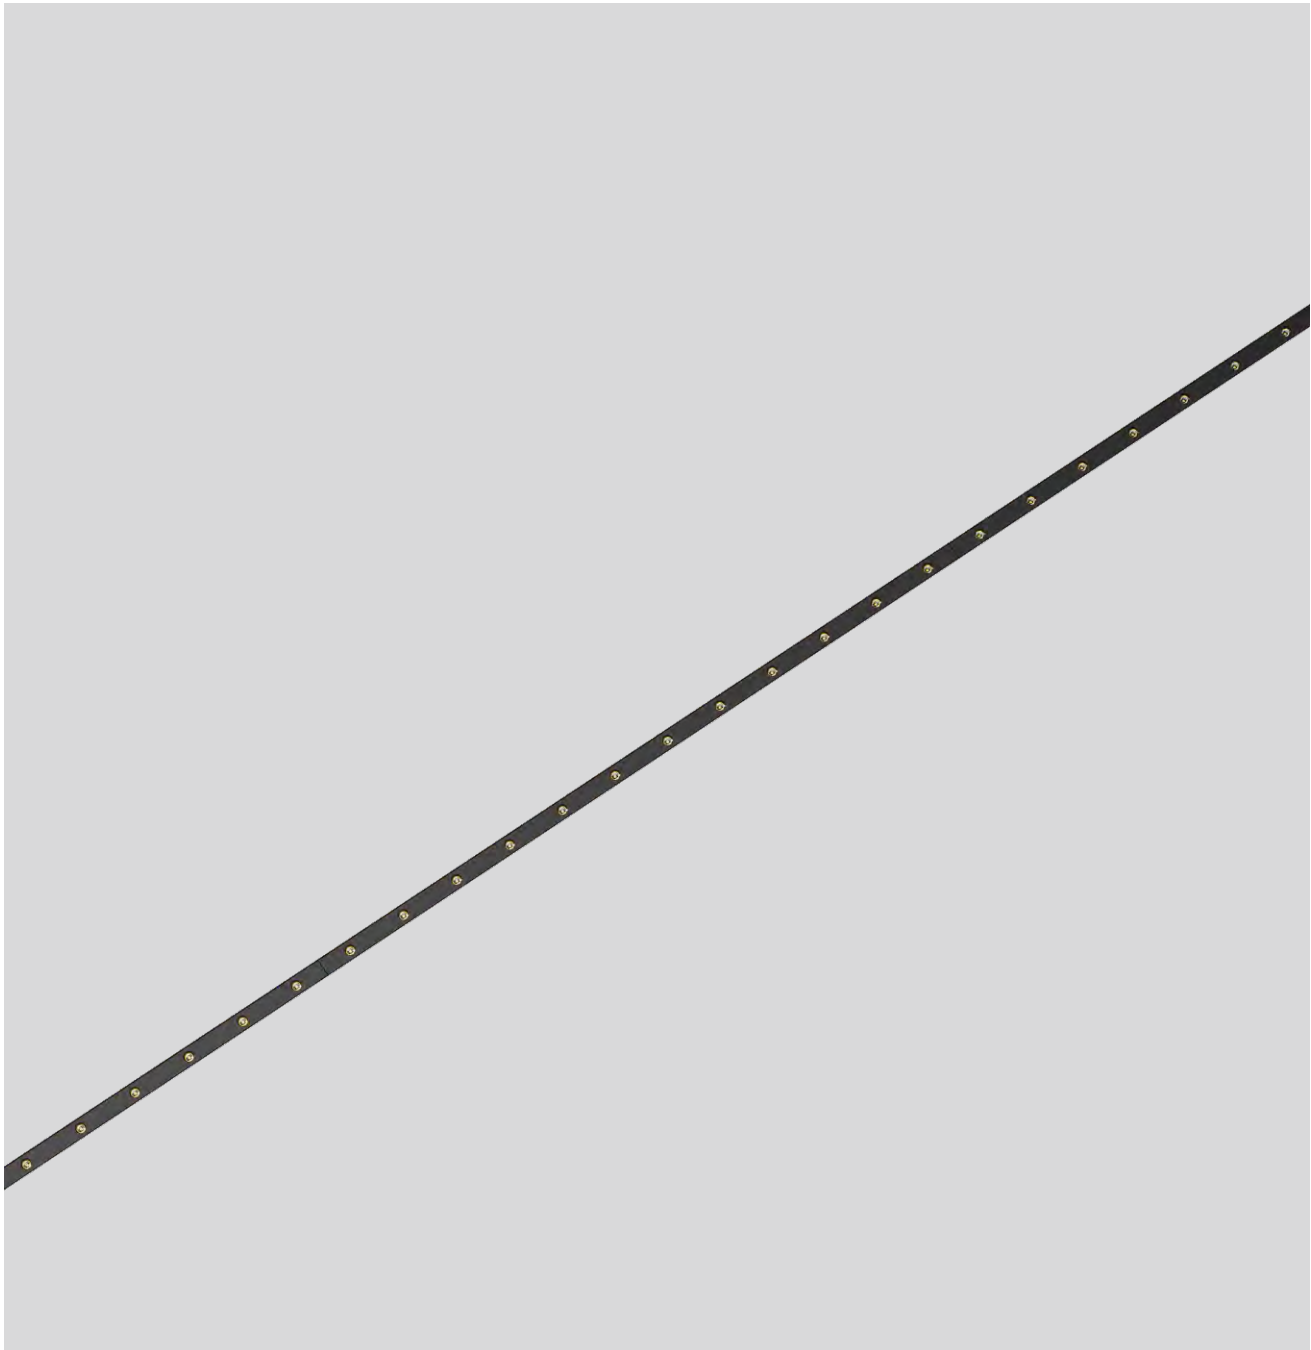

Miniature, Modular, and Directional

A linear directional light with embedded mini-LEDs. It creates focused lighting and highlights specific areas of a space. Supports DIM DALI brightness adjustment.




Slash

Slash



Dimensions

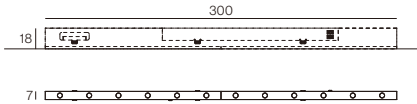

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
SS0006	17.025A12000	6W	PWM	Medium	24°	2700K	>90	95	<3
			DALI 2	Wide flood	50°	3000K	>90	105	<3
			CASAMBI		3500K	>90	114	<3	
					4000K	>90	114	<3	
					lm source				



Material Colour

Code

White	○	S01
Black	●	S02

Notice
For other dimming modes and colors, please consult us.



M7 Micro 48V Track System

Slash

Color		
Finishes		
	S01 White	S02 Black

Notice
For other dimming modes and colors,
please consult us.



Add or Remove Lights
Track-mounted linear lights simplify design, installation, and system maintenance, you can easily add or remove lights from the system to increase brightness or create lighting scenes.



Applications

The mini linear lights have a disappearing appearance and emit diffused light, making them ideal for cabinet lighting and under-cabinet applications.

Areas of application: retail, cabinet displays, display cases, jewelry and valuables showcases, residential, restaurants, galleries.



Slit

Slit



Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
SL0006	17.026A03000	6W	PWM	Wide flood	110°	2700K	>90	133	<3
SL0110	17.026A06000	10W	DALI 2			3000K	>90	136	<3
SL0215	17.026A09000	15W	CASAMBI			3500K	>90	139	<3
						4000K	>90	142	<3
lm source									

CE

CB




TUV

IP20

DC 48V

SMD

Dimensions

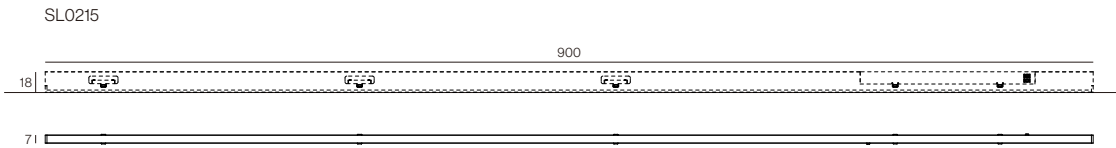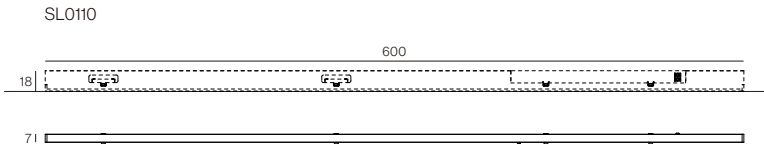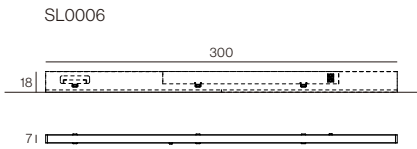


Material Colour	Code
White	<input type="radio"/> S01
Black	<input checked="" type="radio"/> S02

Notice
For other dimming modes and colors, please consult us.



M7 Micro 48V Track System


Slit

Color		
Finishes		
	S01 White	S02 Black

Notice
For other dimming modes and colors,
please consult us.



M7 Micro 48V Track System

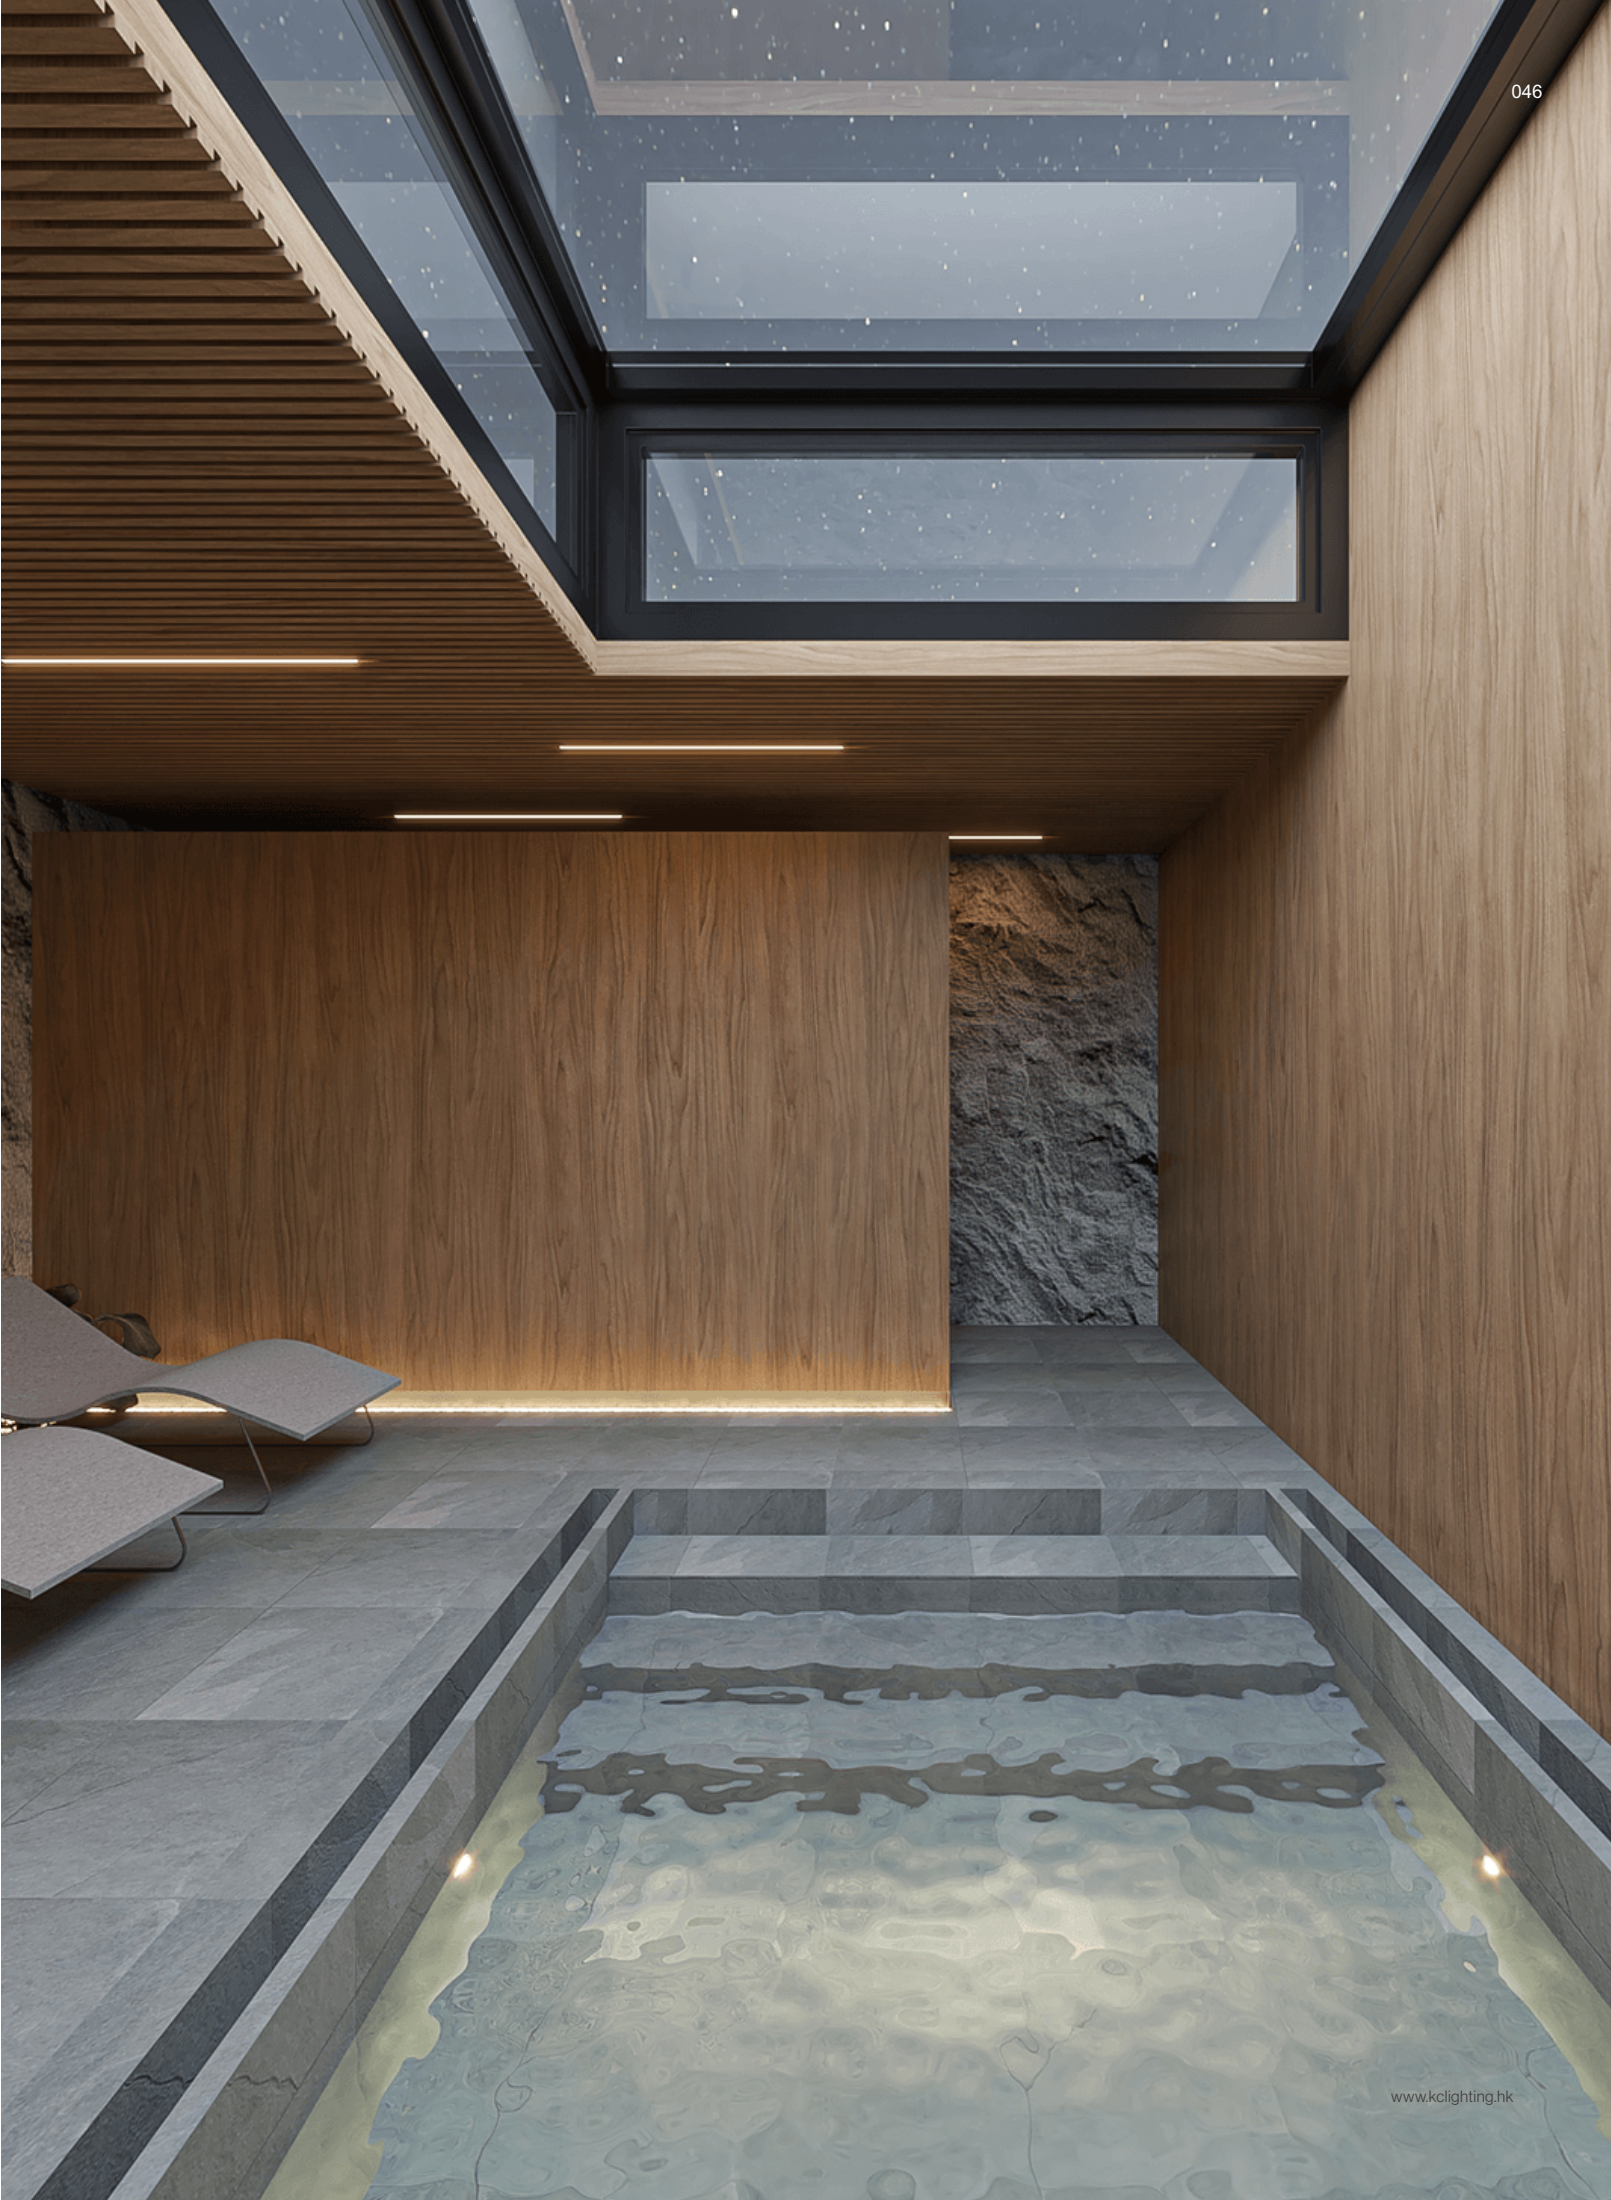



M7
TRACK

Pan






M7 Micro 48V Track System




www.kclighting.hk

Pan



Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PA0004	17.027A01000	4W	PWM	Medium	25°	2700K	>90	128	<3
			DALI 2	Flood	32°	3000K	>90	132	<3
			CASAMBI	Flood	38°	3500K	>90	133	<3
				Wide flood	57°	4000K	>90	137	<3
								lm source	
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div><div>90°</div><div>270°</div></div>									

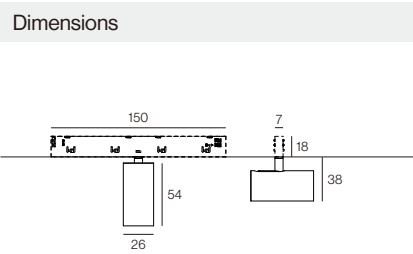






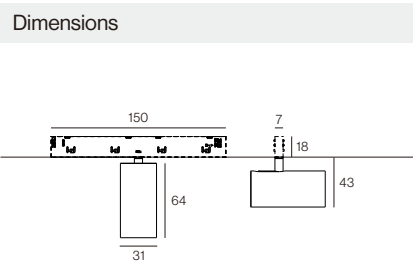
Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Pan



Data






Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PA0106	17.028A01000	6W	PWM	Spot	18°	2700K	>90	128	<3
			DALI 2	Medium	25°	3000K	>90	132	<3
			CASAMBI	Flood	33°	3500K	>90	133	<3
				Flood	46°	4000K	>90	137	<3
lm source									
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div><div>90°</div><div>270°</div></div>									




Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Pan



Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PA0210	17.029A01000	10W	PWM	Spot	19°	2700K	>90	134	<3
			DALI 2	Medium	26°	3000K	>90	139	<3
			CASAMBI	Flood	35°	3500K	>90	141	<3
				Wide flood	44°	4000K	>90	142	<3
									lm source
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div><div>90°</div><div>270°</div></div>									

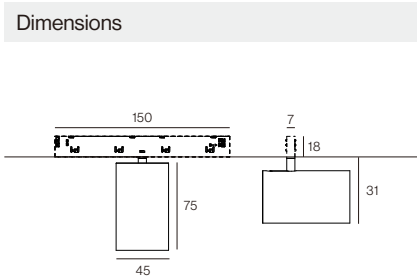







Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13




M7 Micro 48V Track System

Pan

Color			
Finishes			
			
	Q01 Matte White	Q03 Matte Black	
Special Finishes			
			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.

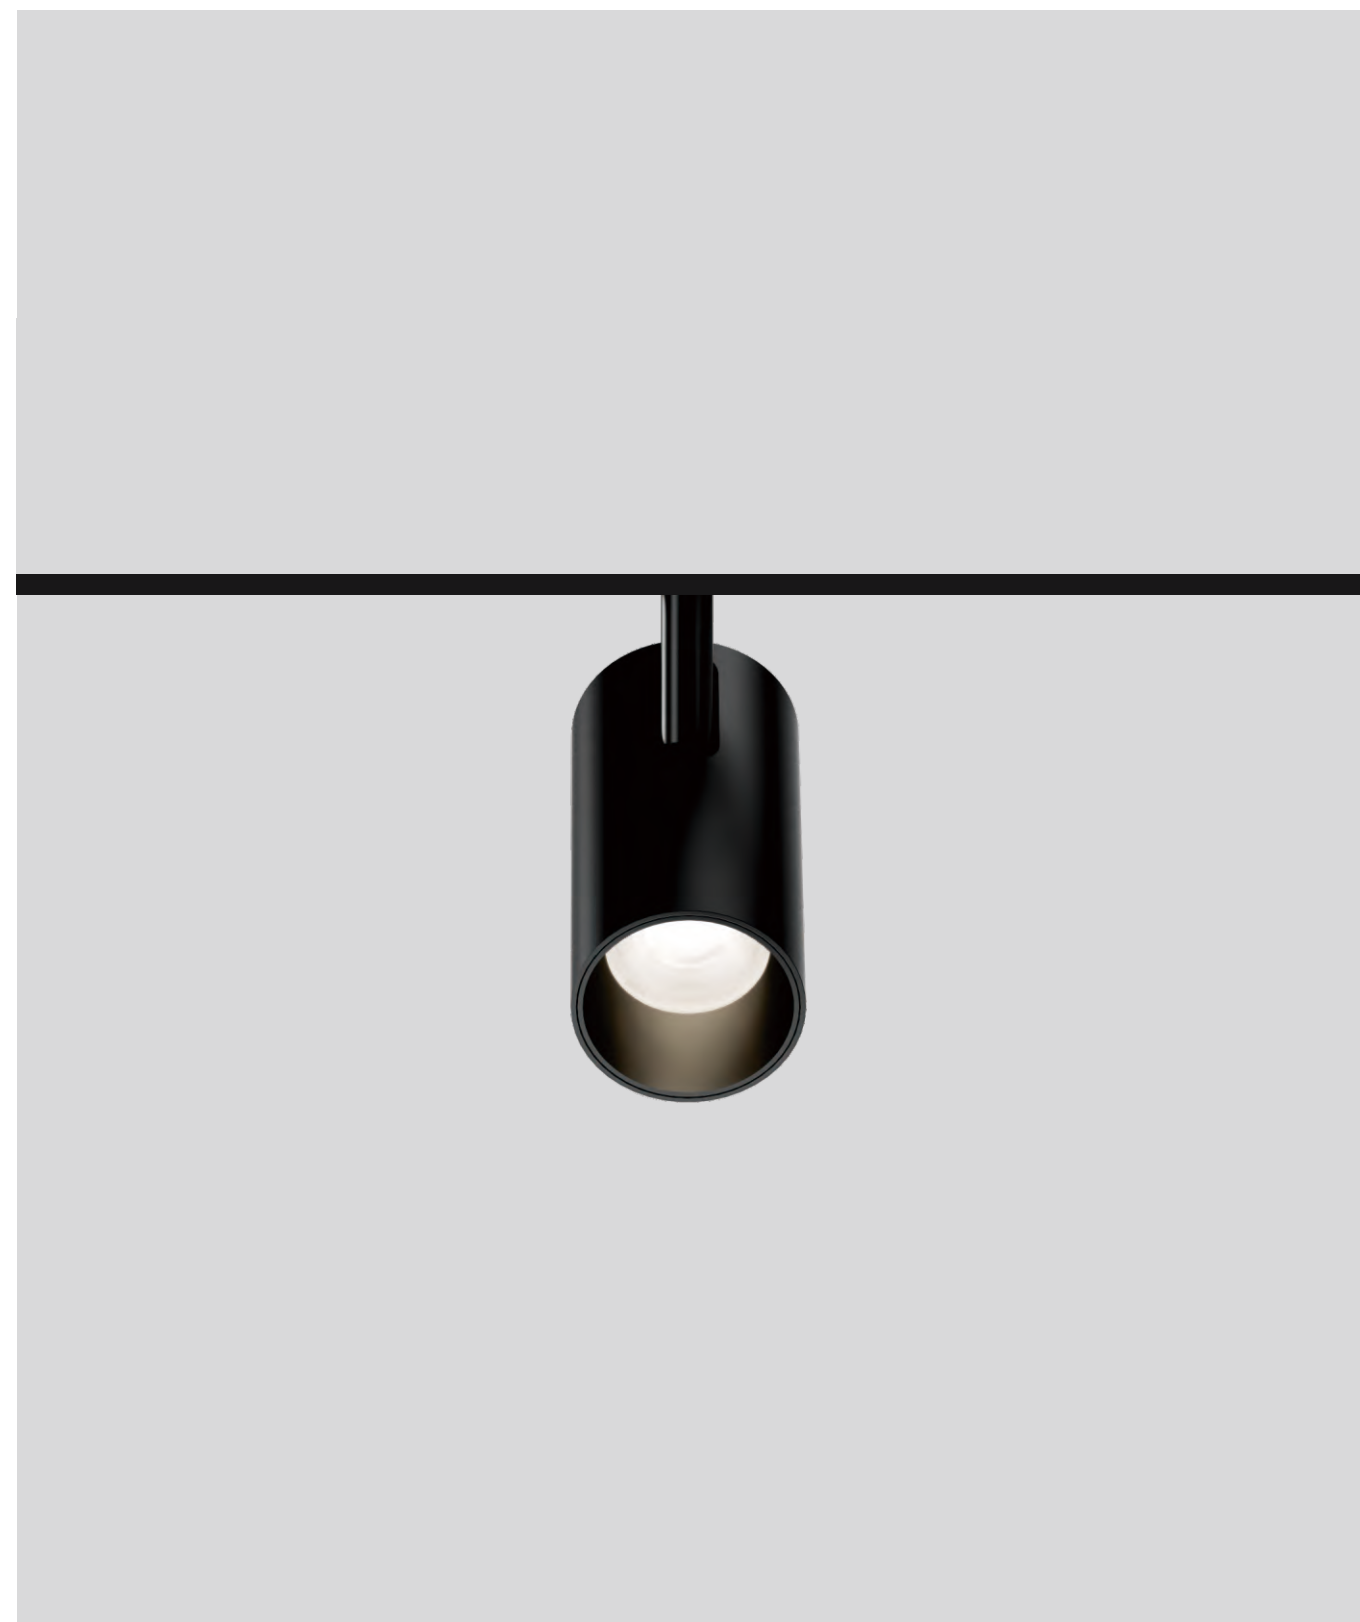



M7
TRACK




Pivot 160


Freestyle Design

The compact and powerful Pivot 160 spotlight is mounted on a slender track, providing downward light by rotating the optical compartment 160° and rotating 270° horizontally. The appeal and uniqueness of this spotlight are further enhanced by the ultimate customizable accessories.

Pivot 160



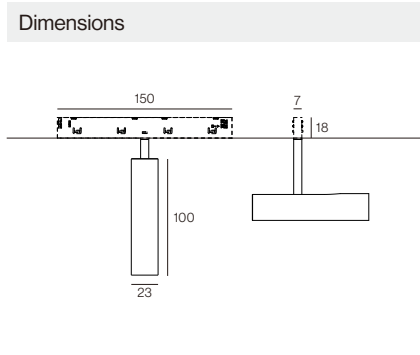


Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PV0004	17.030A01000	4W	PWM	Medium	24°	2700K	>90	128	<3
			DALI 2	Flood	32°	3000K	>90	132	<3
			CASAMBI	Flood	38°	3500K	>90	133	<3
				Wide flood	50°	4000K	>90	137	<3
								lm source	
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div><div>160°</div><div>270°</div></div>									




Material Colour	Code
Matte White	○ Q01
Matte Black	● Q03
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13

Pivot 160



Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PV0106	17.031A01000	6W	PWM	Spot	18°	2700K	>90	128	<3
			DALI 2	Medium	23°	3000K	>90	132	<3
			CASAMBI	Flood	33°	3500K	>90	133	<3
				Flood	43°	4000K	>90	137	<3
lm source									
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div><div>160°</div><div>270°</div></div>									

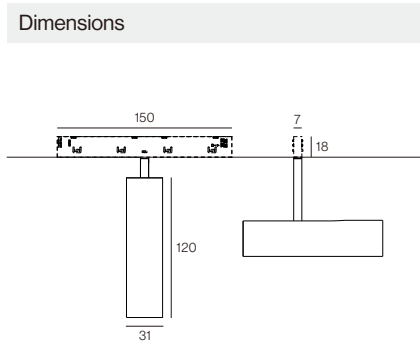






Material Colour	Code
Matte White	○ Q01
Matte Black	● Q03
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13


Notice
For other dimming modes and colors,
please consult us.

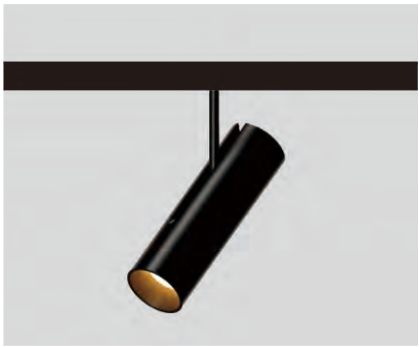Track type | M7A / M7T / M7E / M7H Material | AL

Pivot 160




Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PV0215	17.032A01000	15W	PWM	Spot	18°	2700K	>90	134	<3
			DALI 2	Medium	25°	3000K	>90	139	<3
			CASAMBI	Flood	30°	3500K	>90	141	<3
				Wide flood	40°	4000K	>90	142	<3
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div><div>160°</div><div></div><div>270°</div></div>									

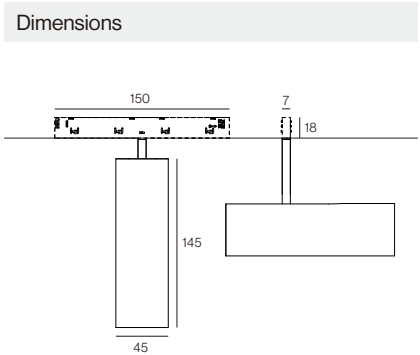

Material Colour	Code
Matte White	○ Q01
Matte Black	● Q03
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13

Notice
For other dimming modes and colors,
please consult us.



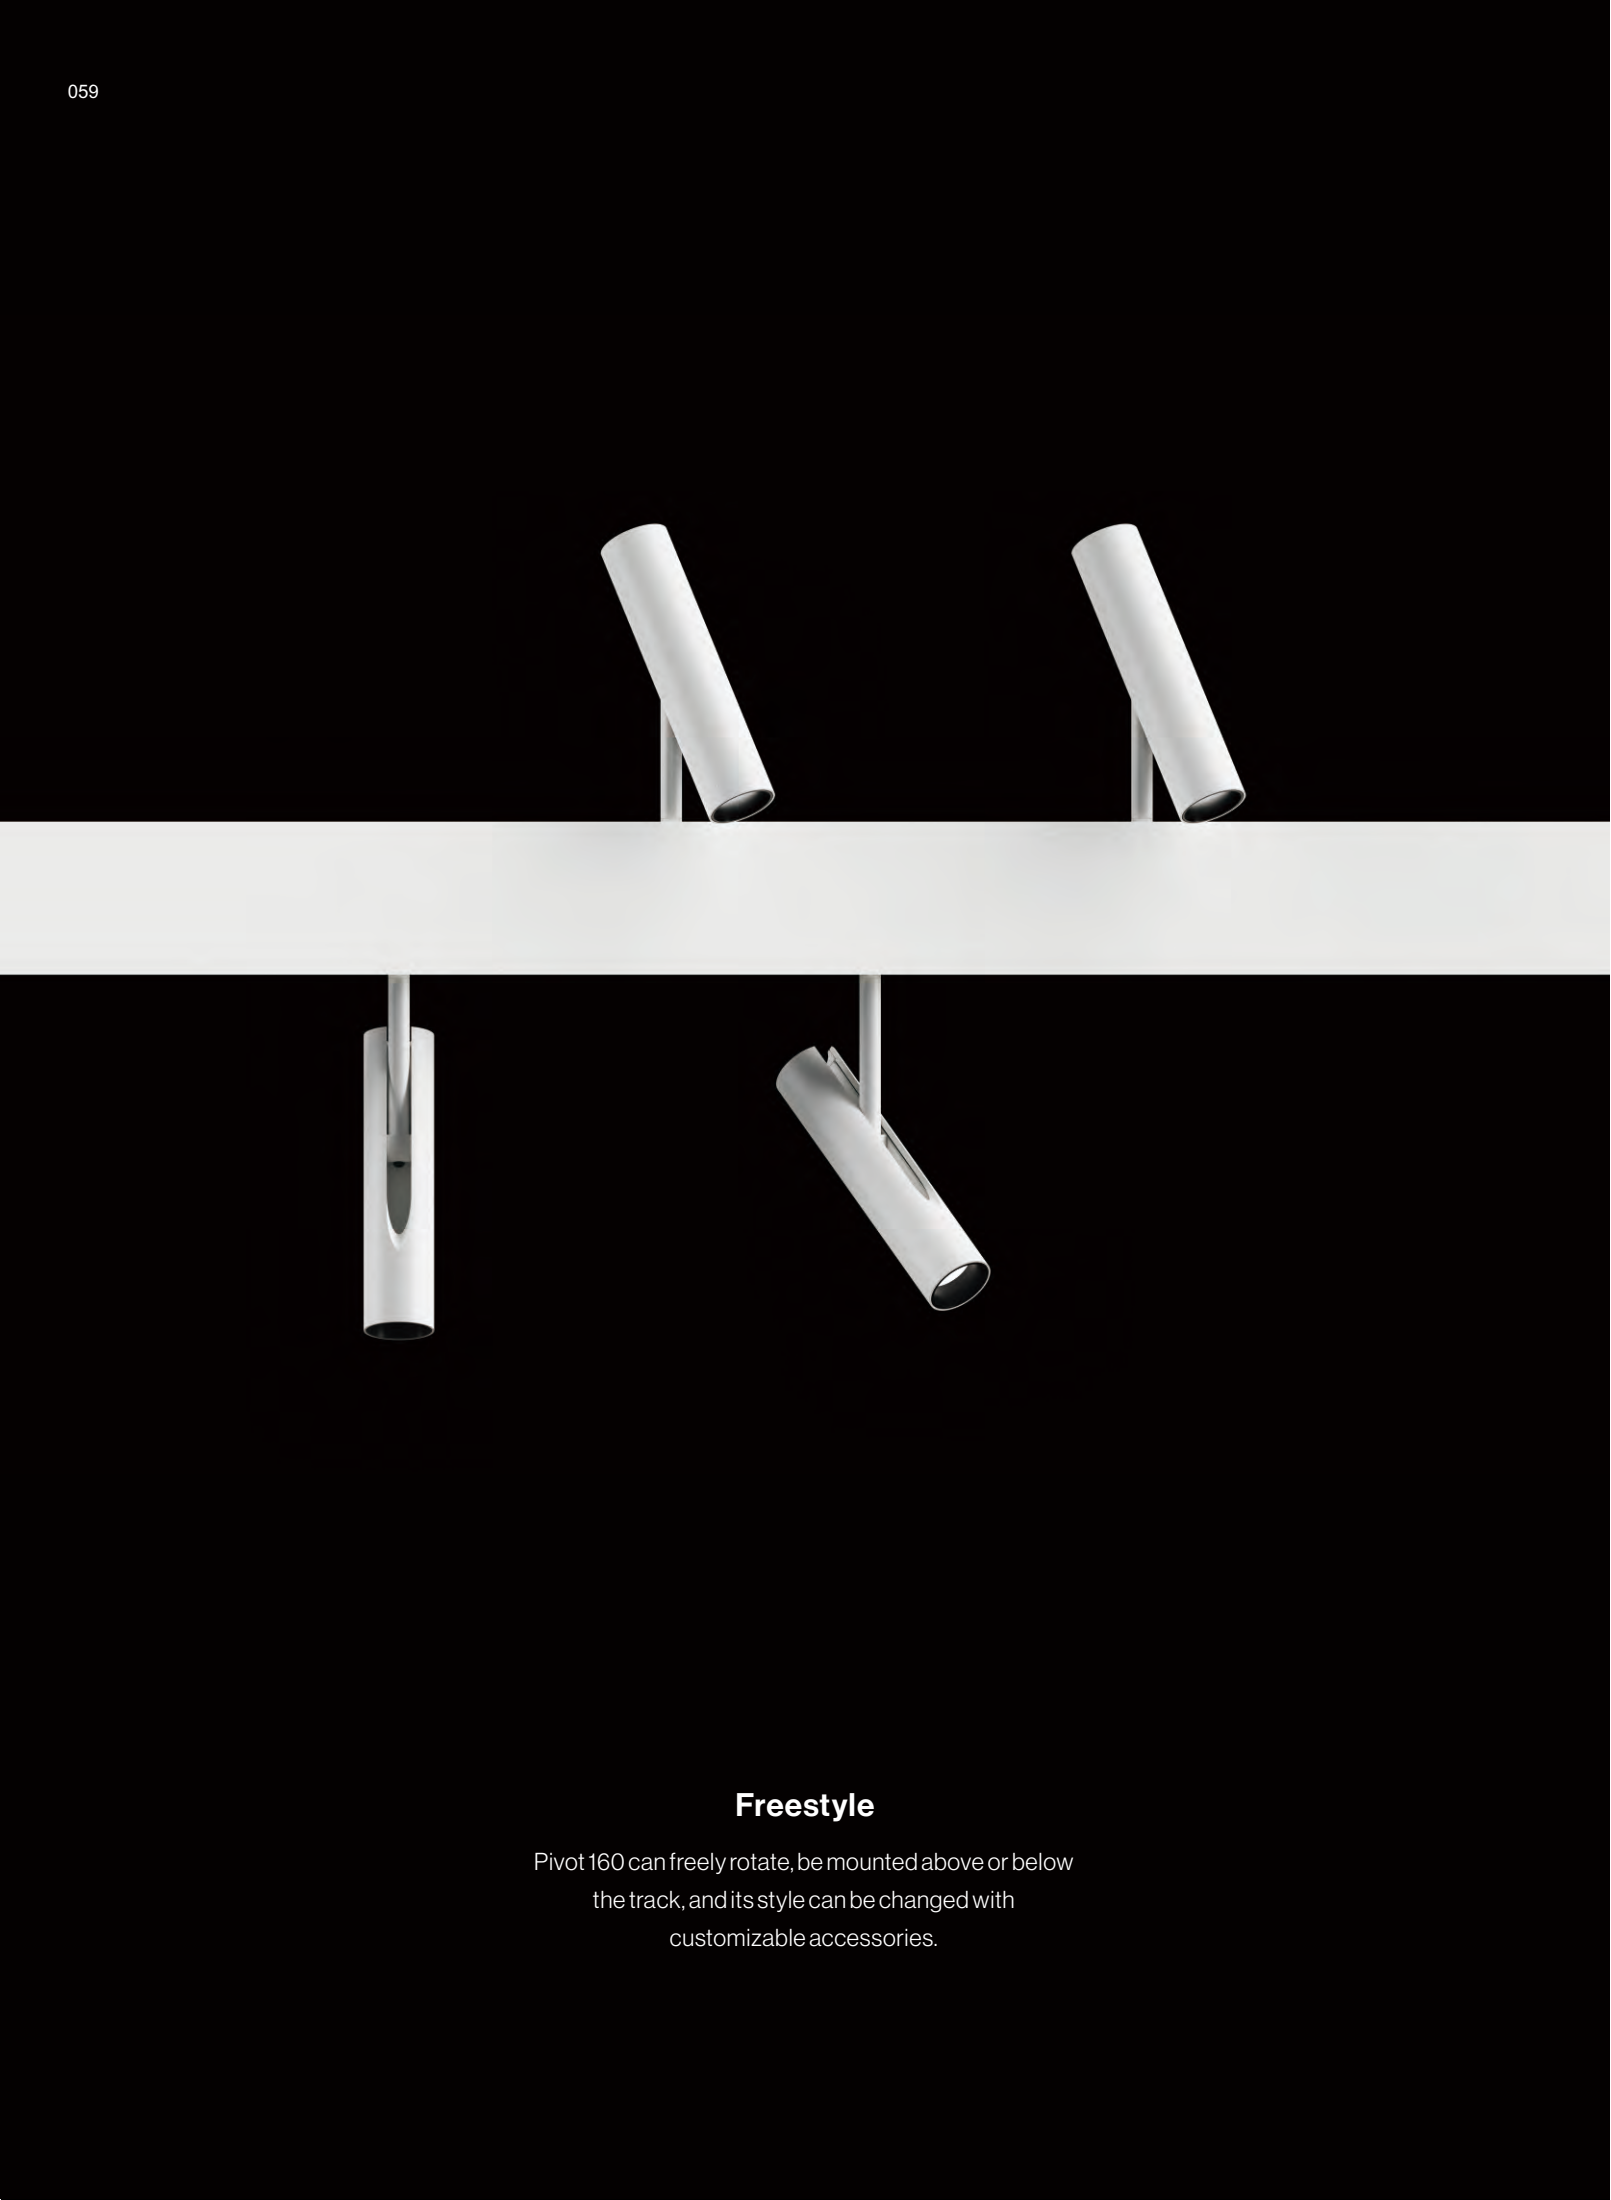


Track type | M7A / M7T / M7E / M7H Material | AL



Freestyle

Pivot 160 can freely rotate, be mounted above or below the track, and its style can be changed with customizable accessories.





Pivot 160

Color	
Finishes	<div></div> <div>Q01 Matte White</div> <div></div> <div>Q03 Matte Black</div>
	<div></div> <div>Y14 Brushed Bronze</div> <div></div> <div>Y12 Brushed Copper</div> <div></div> <div>Y15 Brushed Steel</div>
Special Finishes	<div></div> <div>Y13 Brushed Anthracite</div>

Notice
For other dimming modes and colors, please consult us.


Delicate and Elegant Texture

The customizable accessories further enhance the appeal and uniqueness of this spotlight. Highly innovative technology accurately reproduces the subtle and elegant textures of the accessories, making them a unique identifying element. Ideal for museums, hotels, residential, and retail environments.

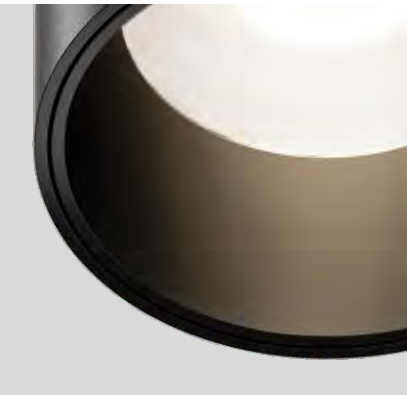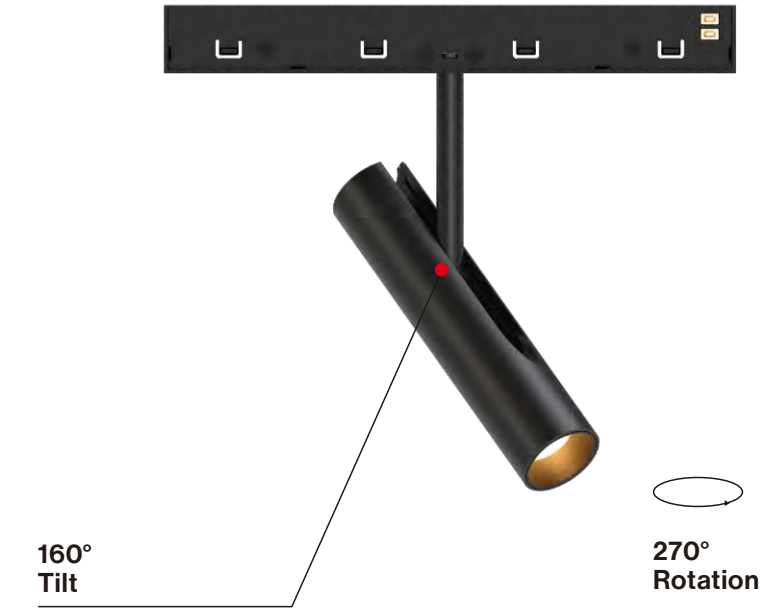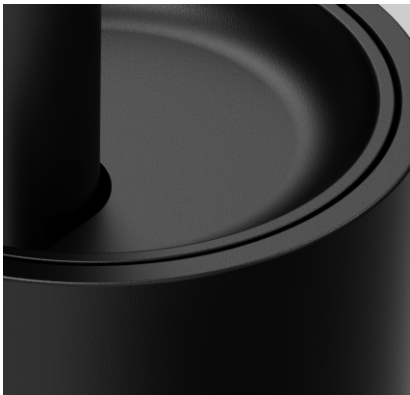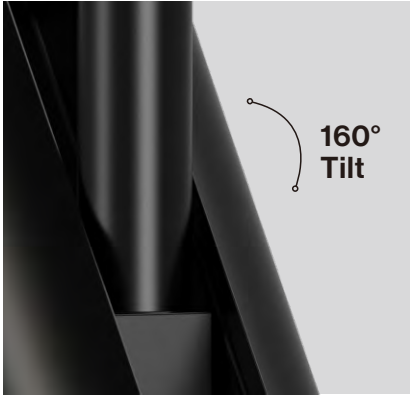





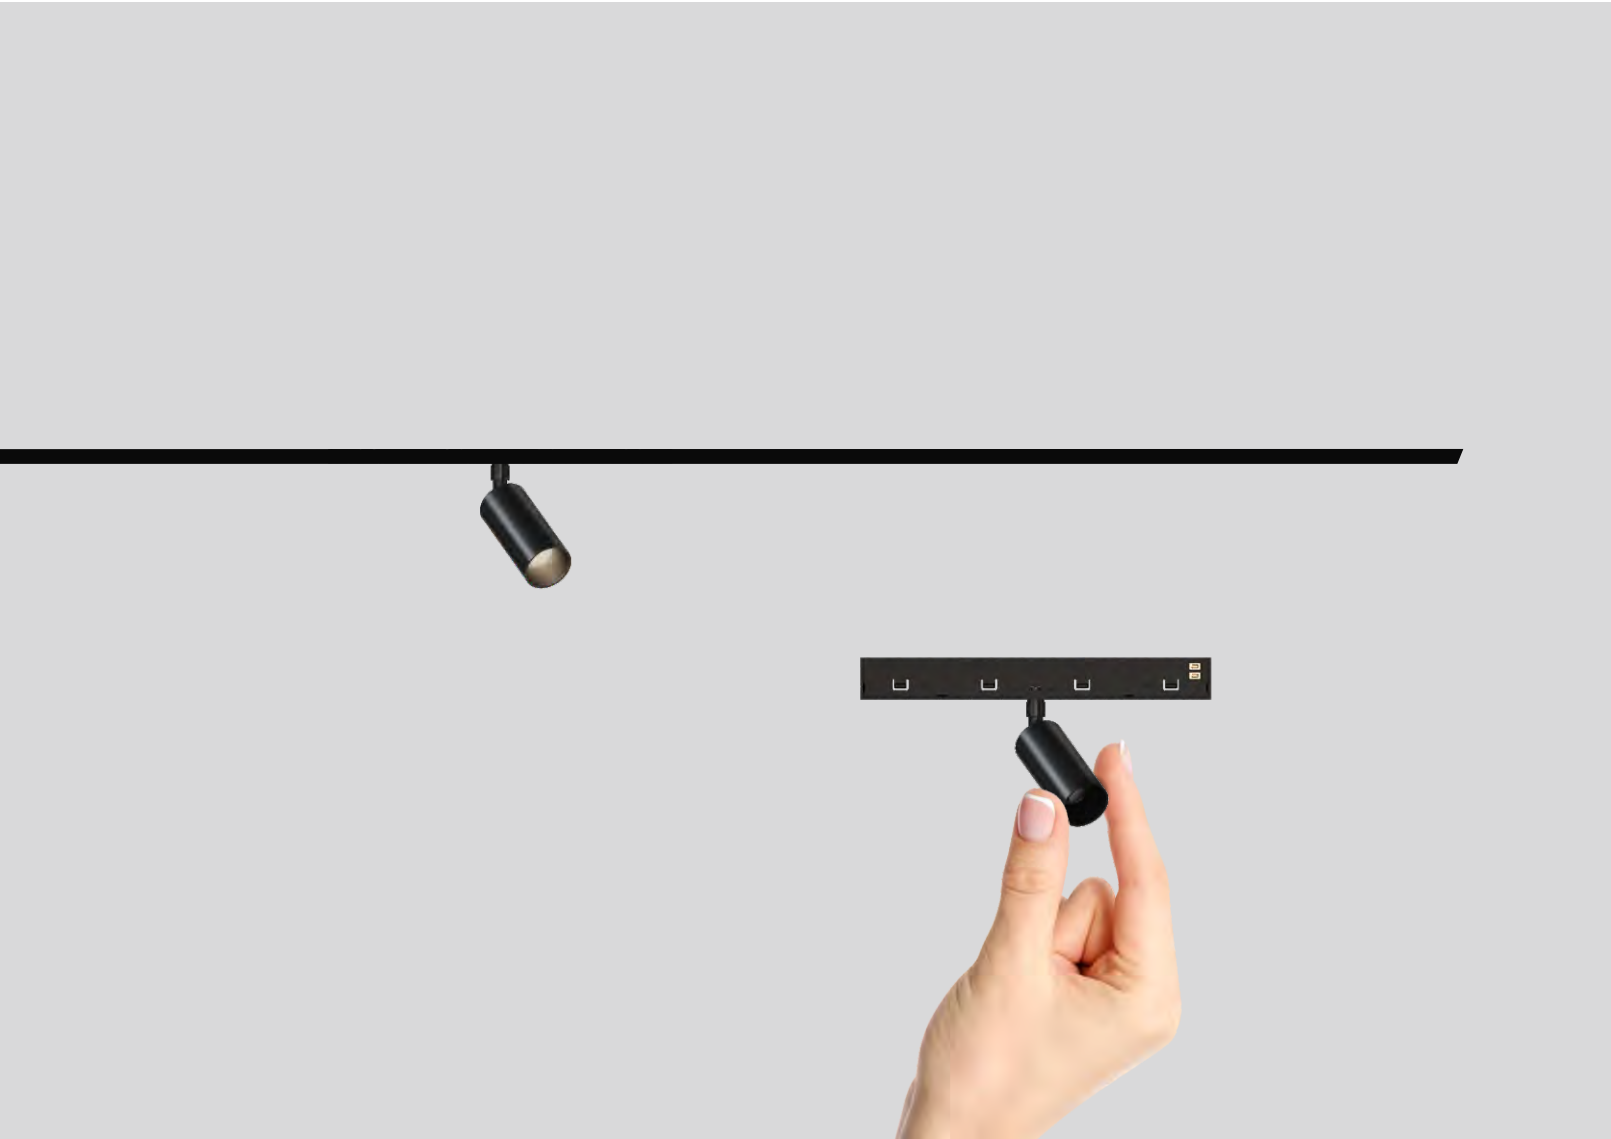

M7
TRACK


IT22

M7 Micro 48V Track System

IT22



Dimensions

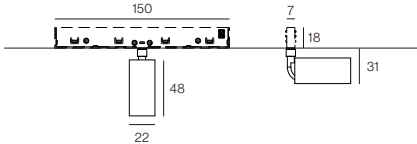

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
IT0003	17.001A01000	3W	PWM	Spot	17°	2700K	>90	134	<3
			DALI 2	Medium	21°	3000K	>90	150	<3
			CASAMBI	Flood	31°	3500K	>90	150	<3
						4000K	>90	169	<3




Material Colour

	Code
Matte White	○ Q01
Matte Black	● Q03
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13

Notice
For other dimming modes and colors,
please consult us.




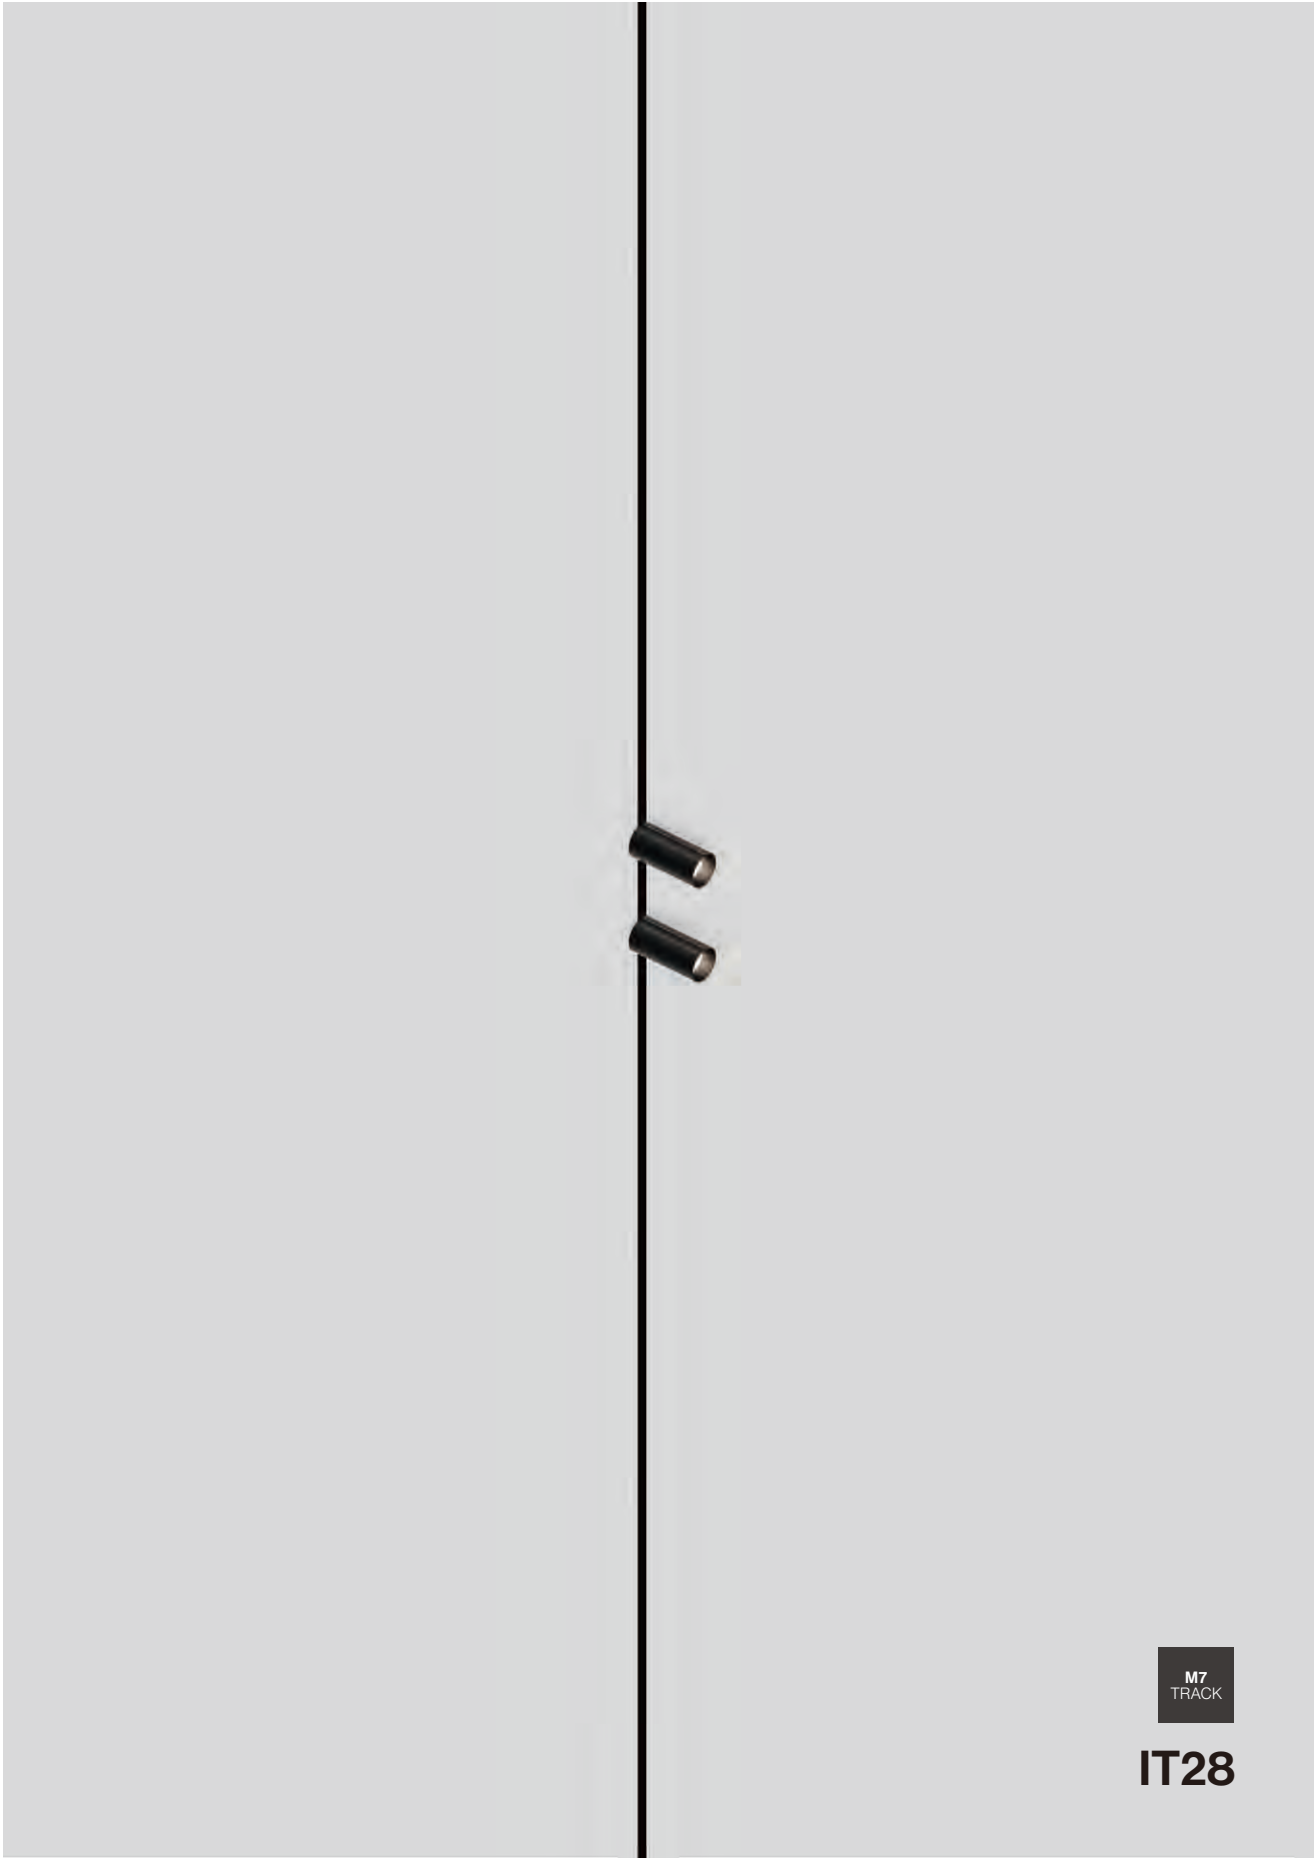

IT28



Dimensions

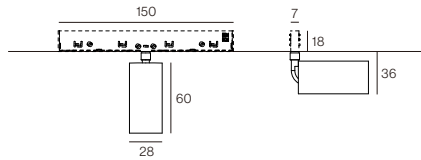

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
IT0105	17.002A01000	5.3W	PWM	Medium	20°	2700K	>90	136	<3
			DALI 2	Flood	27°	3000K	>90	148	<3
			CASAMBI	Flood	40°	3500K	>90	159	<3
				Wide flood	64°	4000K	>90	160	<3

CECBTUV

DC 48V

COB


90°


270°

Material ColourCode

Matte White	○	Q01
Matte Black	●	Q03
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Notice
For other dimming modes and colors, please consult us.

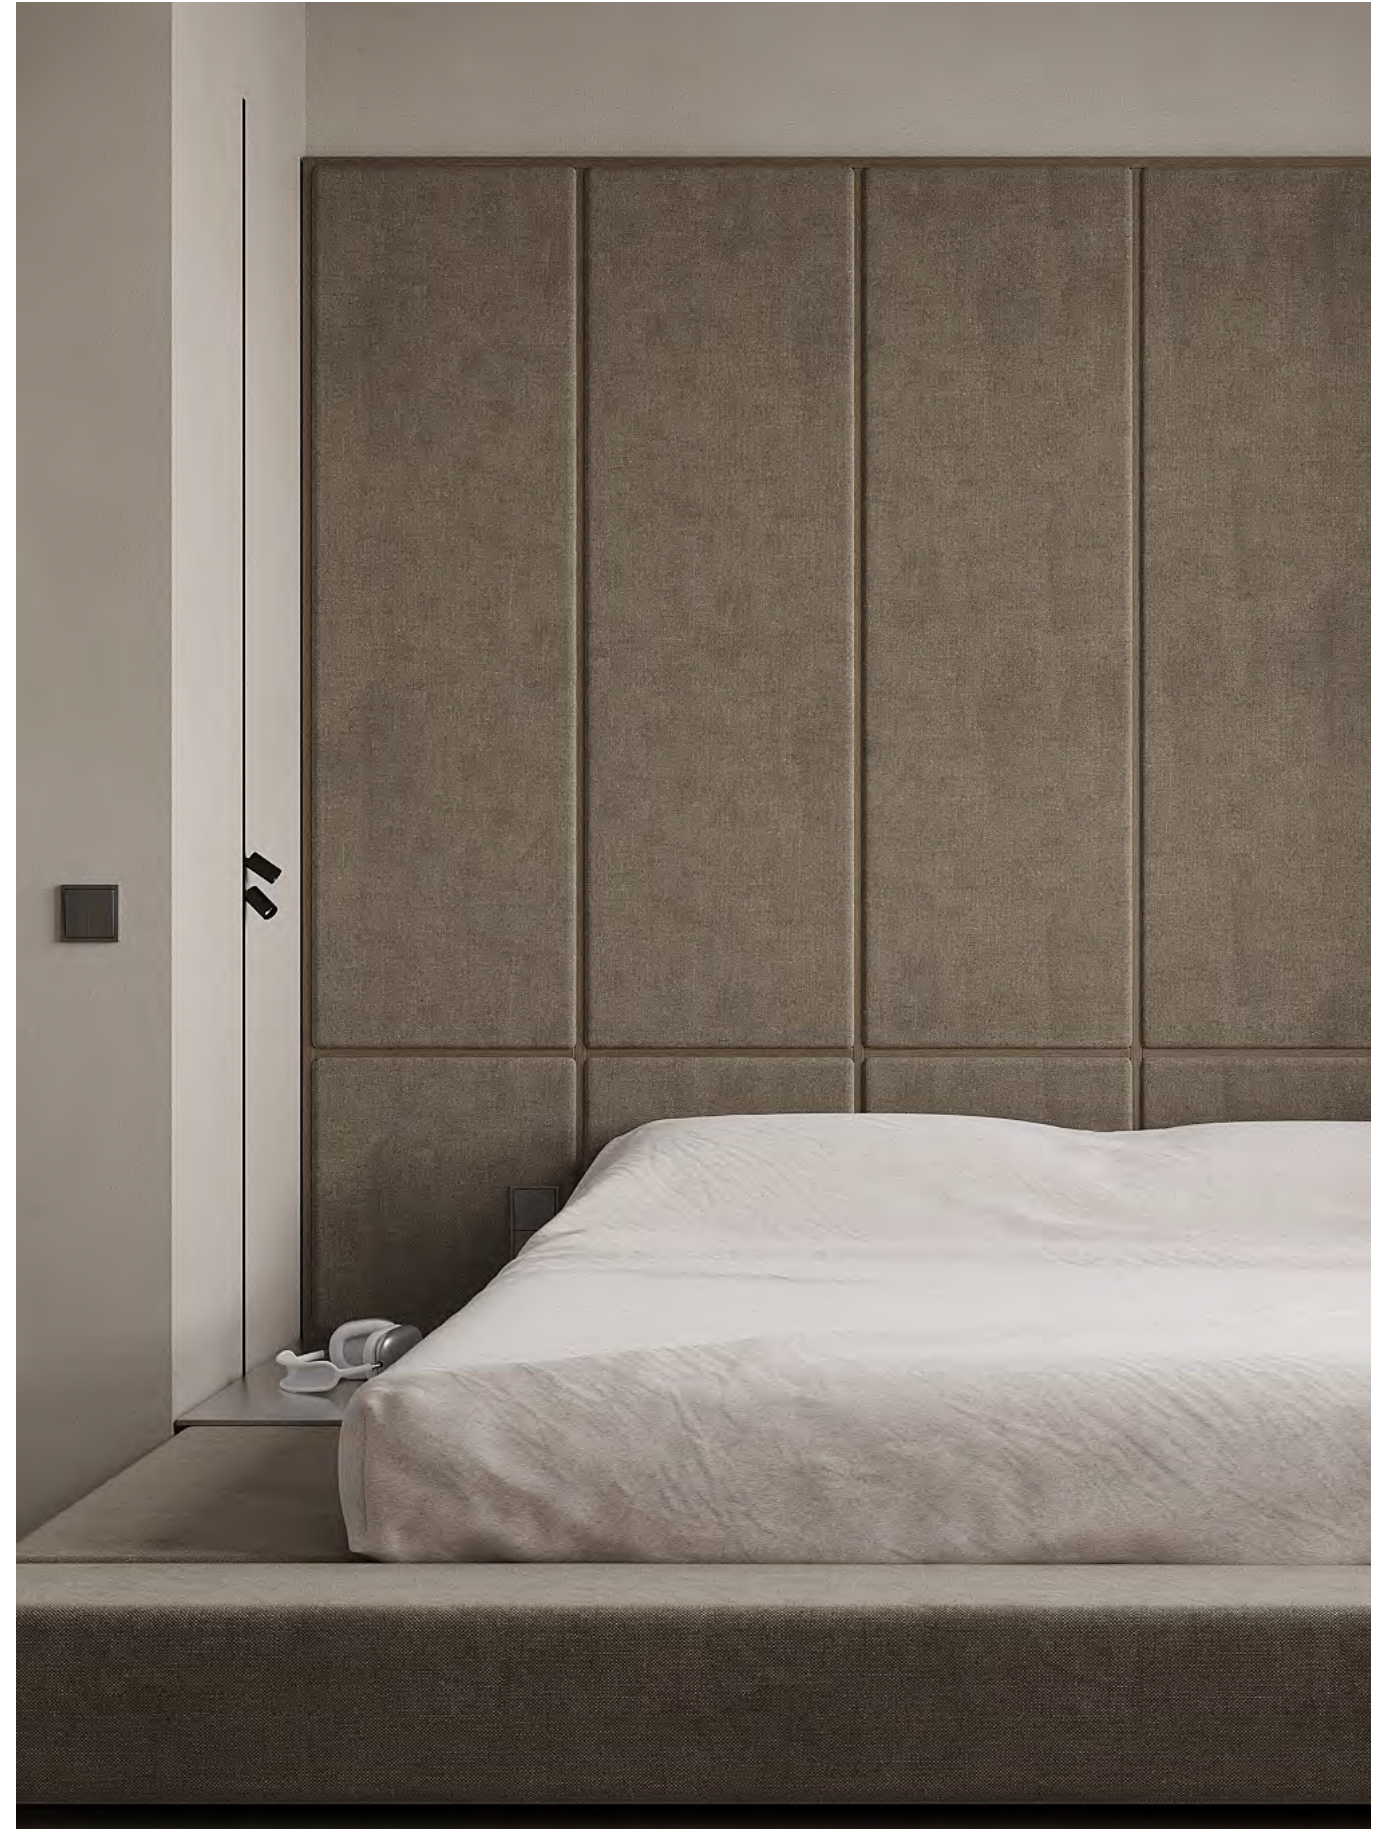

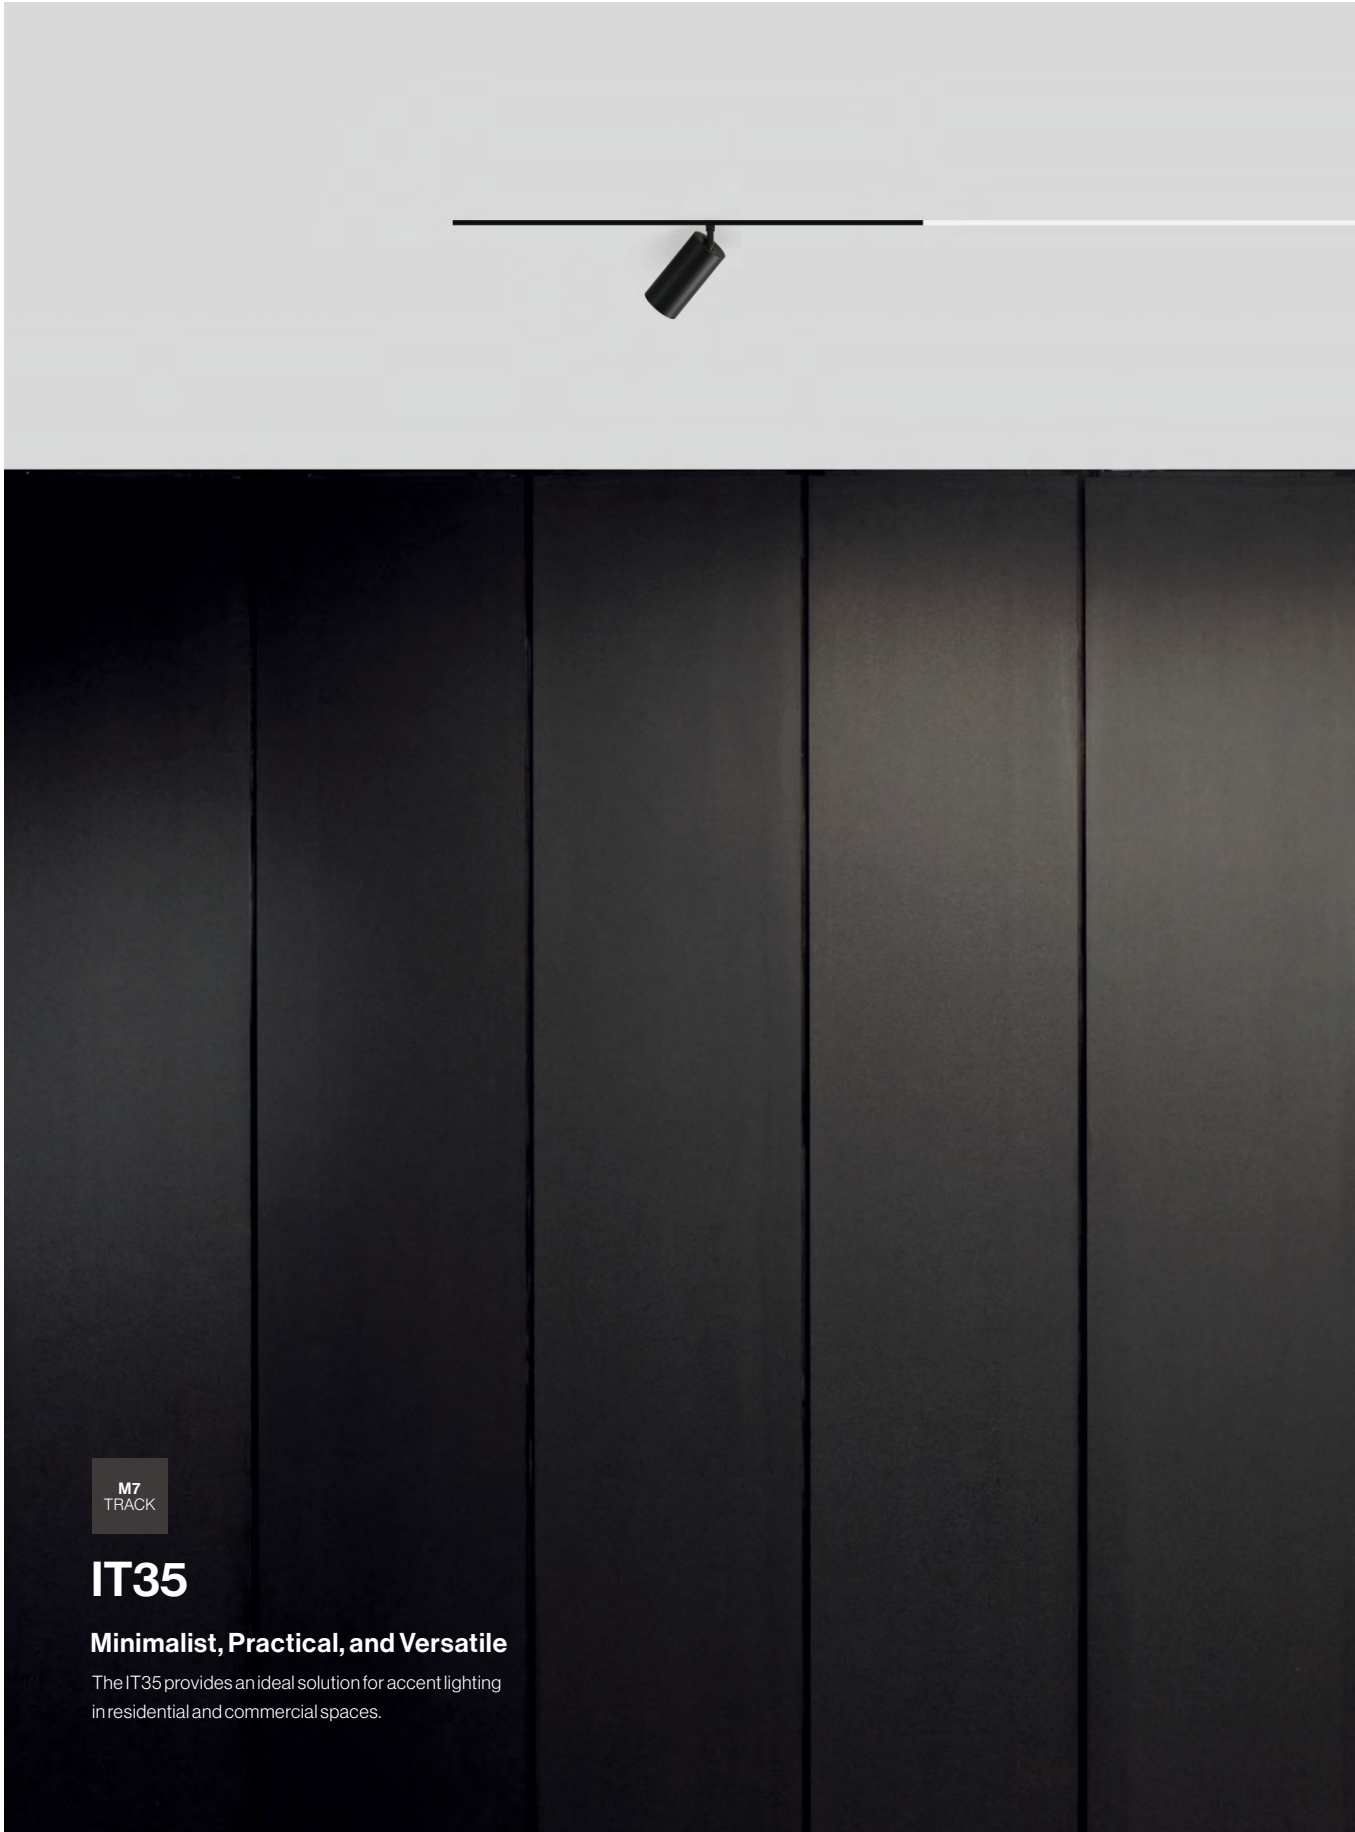

IT35



Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
IT0208	17.012A01000	8W	PWM	Medium	22°	2700K	>90	140	<3
			DALI 2	Medium	28°	3000K	>90	151	<3
			CASAMBI	Flood	37°	3500K	>90	161	<3
				Wide flood	46°	4000K	>90	162	<3
								lm source	


CECBTUV

IP20

DC 48V

COB

Dimensions

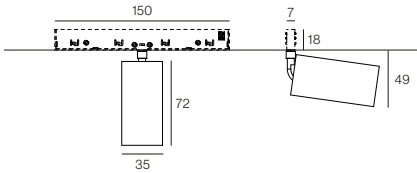







Material Colour

Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Notice
For other dimming modes and colors, please consult us.









IT22/IT28

Color	
Finishes	<div></div> <div></div>
	<div>Q01 Matte White</div> <div>Q03 Matte Black</div>
Special Finishes	<div></div> <div></div> <div></div>
	<div>Y14 Brushed Bronze</div> <div>Y12 Brushed Copper</div> <div>Y15 Brushed Steel</div>
	<div></div>
	<div>Y13 Brushed Anthracite</div>

Notice
For other dimming modes and colors,
please consult us.

IT35

Color	
Finishes	<div></div> <div></div>
	<div>Q01 Matte White</div> <div>Q03 Matte Black</div>
Special Finishes	<div></div> <div></div> <div></div>
	<div>Y14 Brushed Bronze</div> <div>Y12 Brushed Copper</div> <div>Y15 Brushed Steel</div>
	<div></div>
	<div>Y13 Brushed Anthracite</div>

Notice
For other dimming modes and colors,
please consult us.






M7
TRACK

IT30

Pure Elegance

The refined form of the 48V track combined with the elegant simplicity of the system fixtures creates a beautiful whole: simple, logical, and high-quality.

Every component of this low-voltage system has been meticulously crafted, with particular attention paid to the details of each track and fixture structure, ensuring miniaturization.

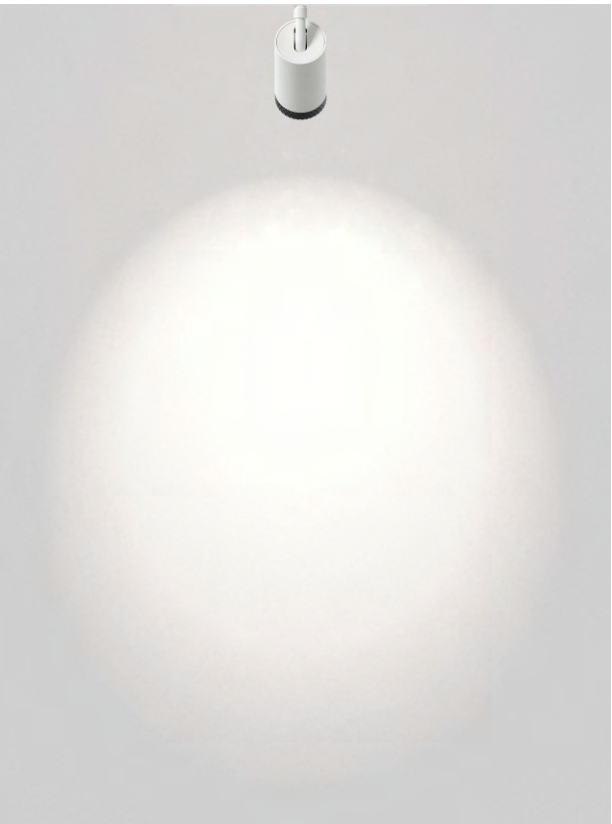

More Precise Lighting

Thanks to the IT30's lens and focal length adjuster, the beam angle can be easily adjusted with a slight manual movement.

The IT30 is your ultimate tool for accent lighting. Its various beam options are sure to make an impression.



IT30


Focus on the Right Things

The IT30 is the ultimate tool for accent lighting. With its focus function and multiple beam options, it always stands out.

IT30



Dimensions

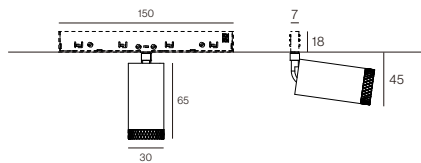

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
IT0305	17.003A01000	5.3W	PWM	Zoom spot	14°-28°	2700K	>90	136	<3
			DALI 2			3000K	>90	148	<3
			CASAMBI			3500K	>90	159	<3
						4000K	>90	160	<3
						lm source			









Material Colour

Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Notice
For other dimming modes and colors, please consult us.



IT30

Color			
Finishes			
	<div>Q01 Matte White</div>		
Special Finishes			
	<div>Y14 Brushed Bronze</div>		
	<div>Y12 Brushed Copper</div>	<div>Y15 Brushed Steel</div>	
			
	<div>Y13 Brushed Anthracite</div>		

Notice
For other dimming modes and colors,
please consult us.






Pot



Dimensions

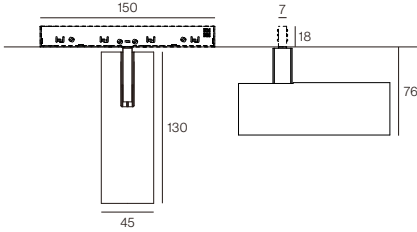


Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PO0015	17.035A01000	15W	PWM	Spot	19°	2700K	>90	140	<3
			DALI 2	Medium	25°	3000K	>90	151	<3
			CASAMBI	Flood	36°	3500K	>90	161	<3
				Wide flood	50°	4000K	>90	162	<3
lm source									


CE

CB

TUV





IP20




DC 48V

COB



90°

270°




Material Colour Code

White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Pot



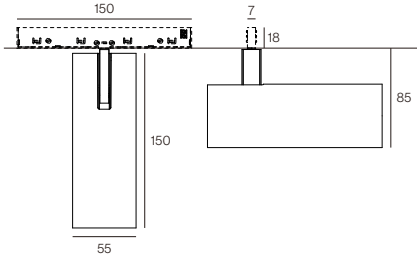

Dimensions





Data


Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PO0220	17.036A01000	20W	PWM	Spot	23°	2700K	>90	145	<3
			DALI 2	Medium	26°	3000K	>90	153	<3
			CASAMBI	Flood	37°	3500K	>90	166	<3
				Wide flood	56°	4000K	>90	166	<3
lm source									































Material Colour Code







Matte White	○	F04
Matte Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Notice
For other dimming modes and colors,
please consult us.




M7 Micro 48V Track System

Pot

Color	
Finishes	<div></div> <div>F04 White</div> <div></div> <div>F05 Black</div>
	<div></div> <div>Y14 Brushed Bronze</div> <div></div> <div>Y12 Brushed Copper</div> <div></div> <div>Y15 Brushed Steel</div>
Special Finishes	<div></div> <div>Y13 Brushed Anthracite</div>

Notice
For other dimming modes and colors,
please consult us.

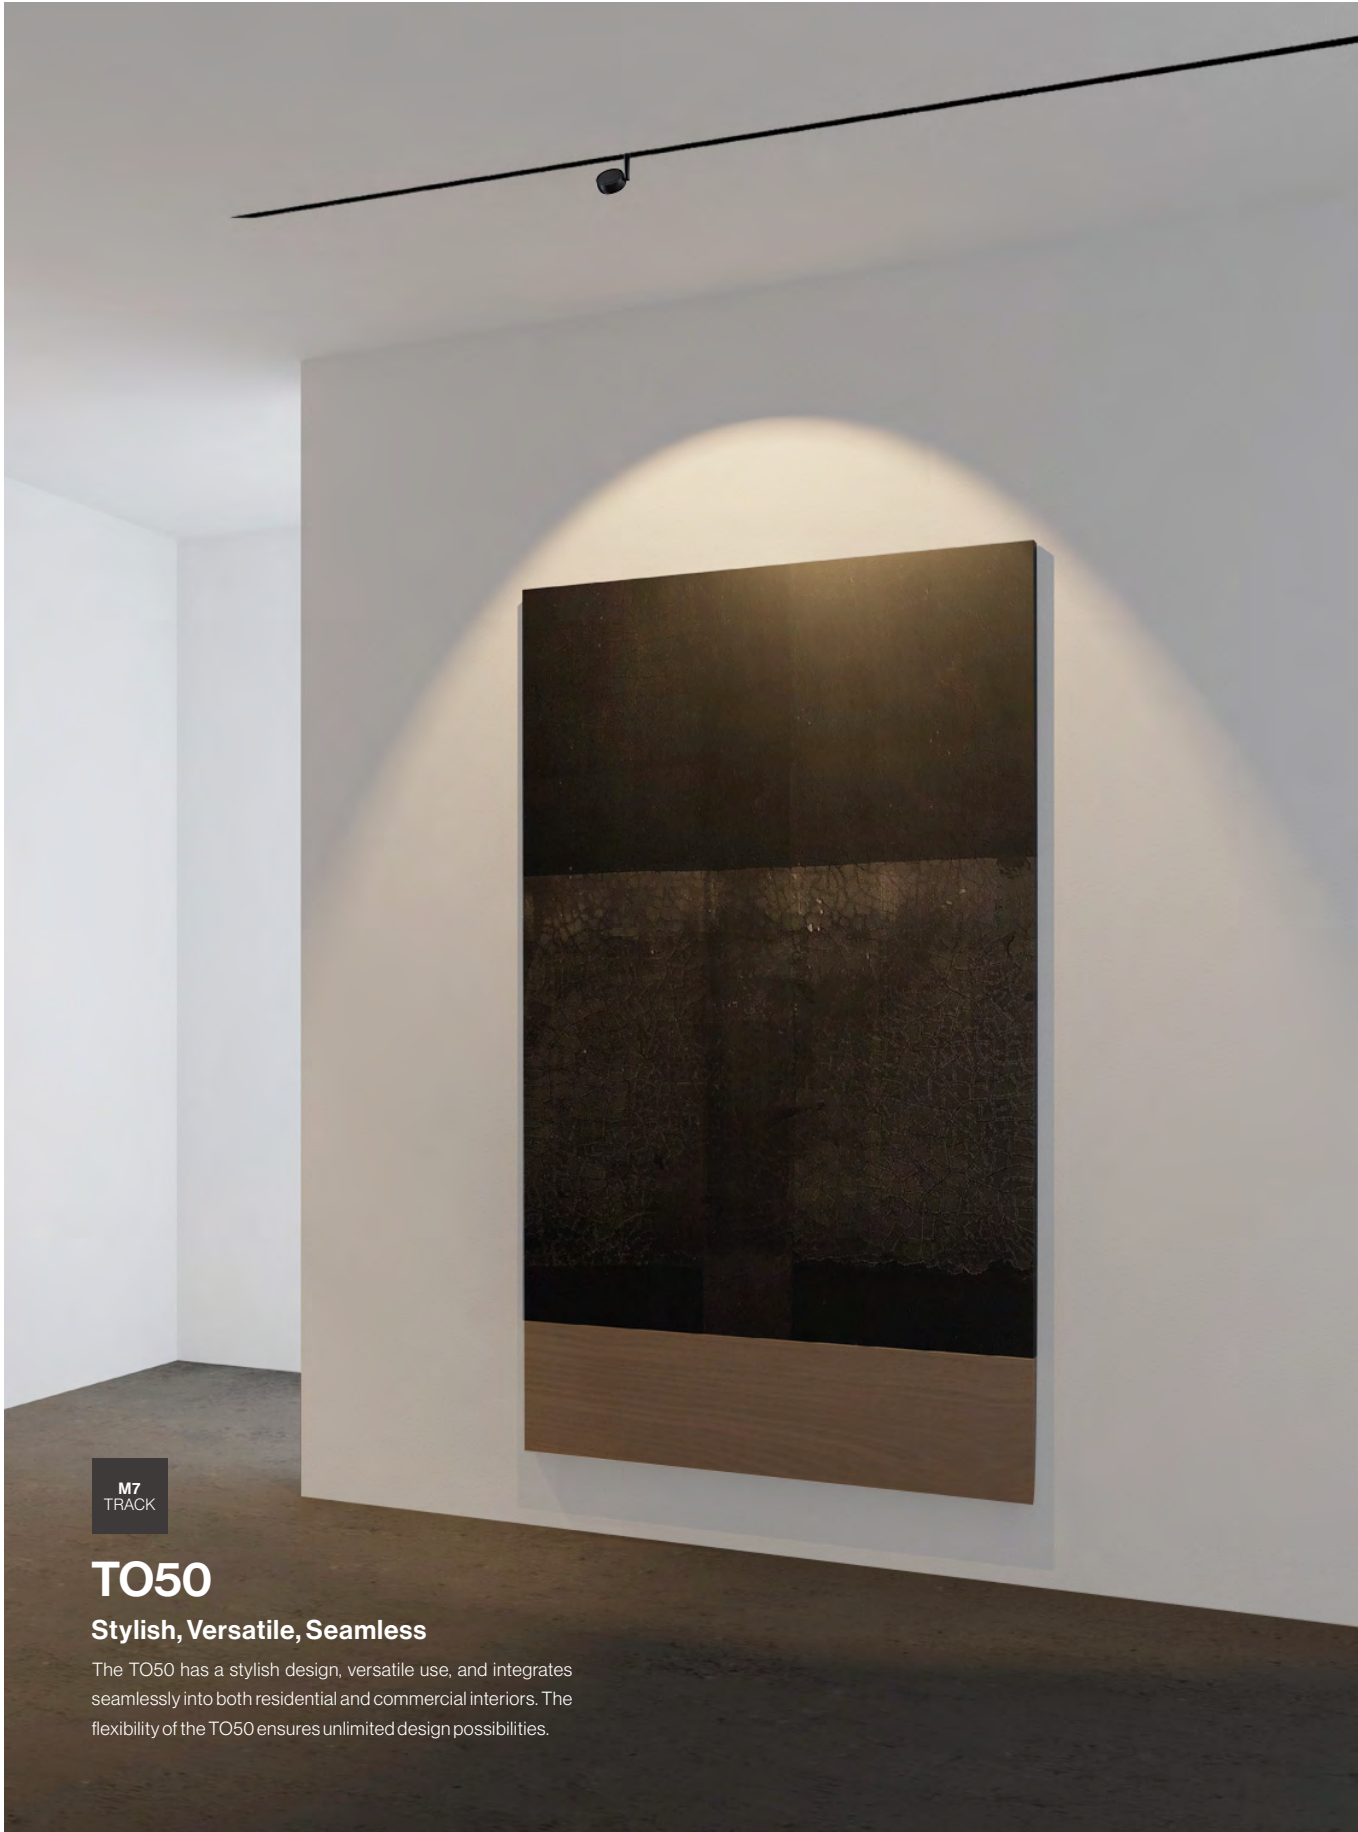


M7
TRACK

TO50


Stylish, Versatile, Seamless

The TO50 has a stylish design, versatile use, and integrates seamlessly into both residential and commercial interiors. The flexibility of the TO50 ensures unlimited design possibilities.

TO50

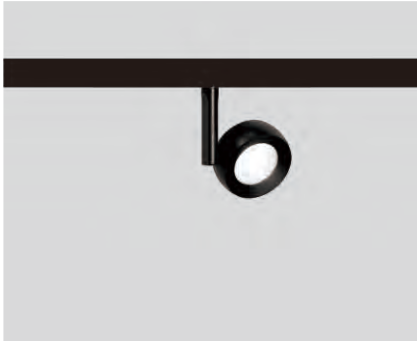

Dimensions

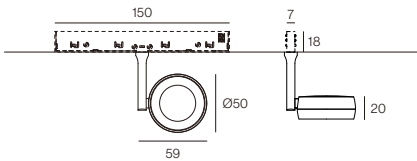

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
TO0006	17.006A01000	5.6W	PWM	Spot	16°	2700K	>90	136	<3
			DALI 2	Medium	25°	3000K	>90	148	<3
			CASAMBI	Flood	32°	3500K	>90	159	<3
				Wide flood	65°	4000K	>90	160	<3



Material Colour

Material Colour	Code
Matte White	○ Q01
Matte Black	● Q03
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13

Notice
For other dimming modes and colors, please consult us.

TO50

Color

Finishes



Q01
Matte White



Q03
Matte Black

Special Finishes



Y14
Brushed Bronze



Y12
Brushed Copper




Y15
Brushed Steel



Y13
Brushed Anthracite

270° Rotation | 355° Tilt

The TO50 series is the perfect solution for efficient and precise accent lighting. Its adjustability on the vertical (355°) and horizontal (270°) axes ensures maximum flexibility. It can be integrated into architectural structures, and its multiple beam options and different lengths meet all types of lighting needs.

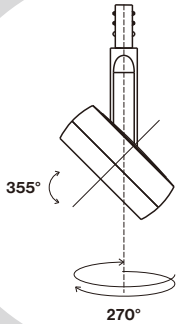




M7
TRACK


Mars

This product breaks away from traditional concepts, with the lamp head being flexibly adjustable to change the angle of illumination. It automatically rotates effortlessly to achieve the ideal lighting effect.

Mars

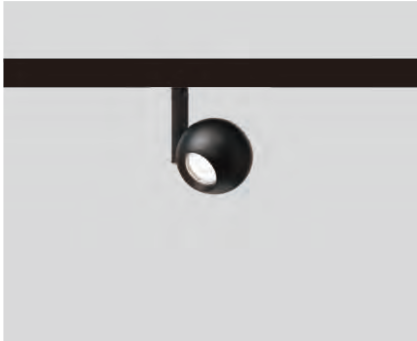

Dimensions

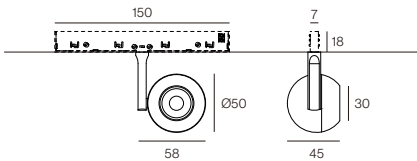

Data

Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
MR0006	17.013A01000	5.6W	PWM	Spot 19°	2700K	>90	136	<3
			DALI 2	Medium 24°	3000K	>90	148	<3
			CASAMBI	Flood 31°	3500K	>90	159	<3
				Flood 43°	4000K	>90	160	<3

lm source









Material Colour

Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13


Notice
For other dimming modes and colors, please consult us.



Mars

Color			
Finishes			
			
	Q01 Matte White	Q03 Matte Black	
Special Finishes			
			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.

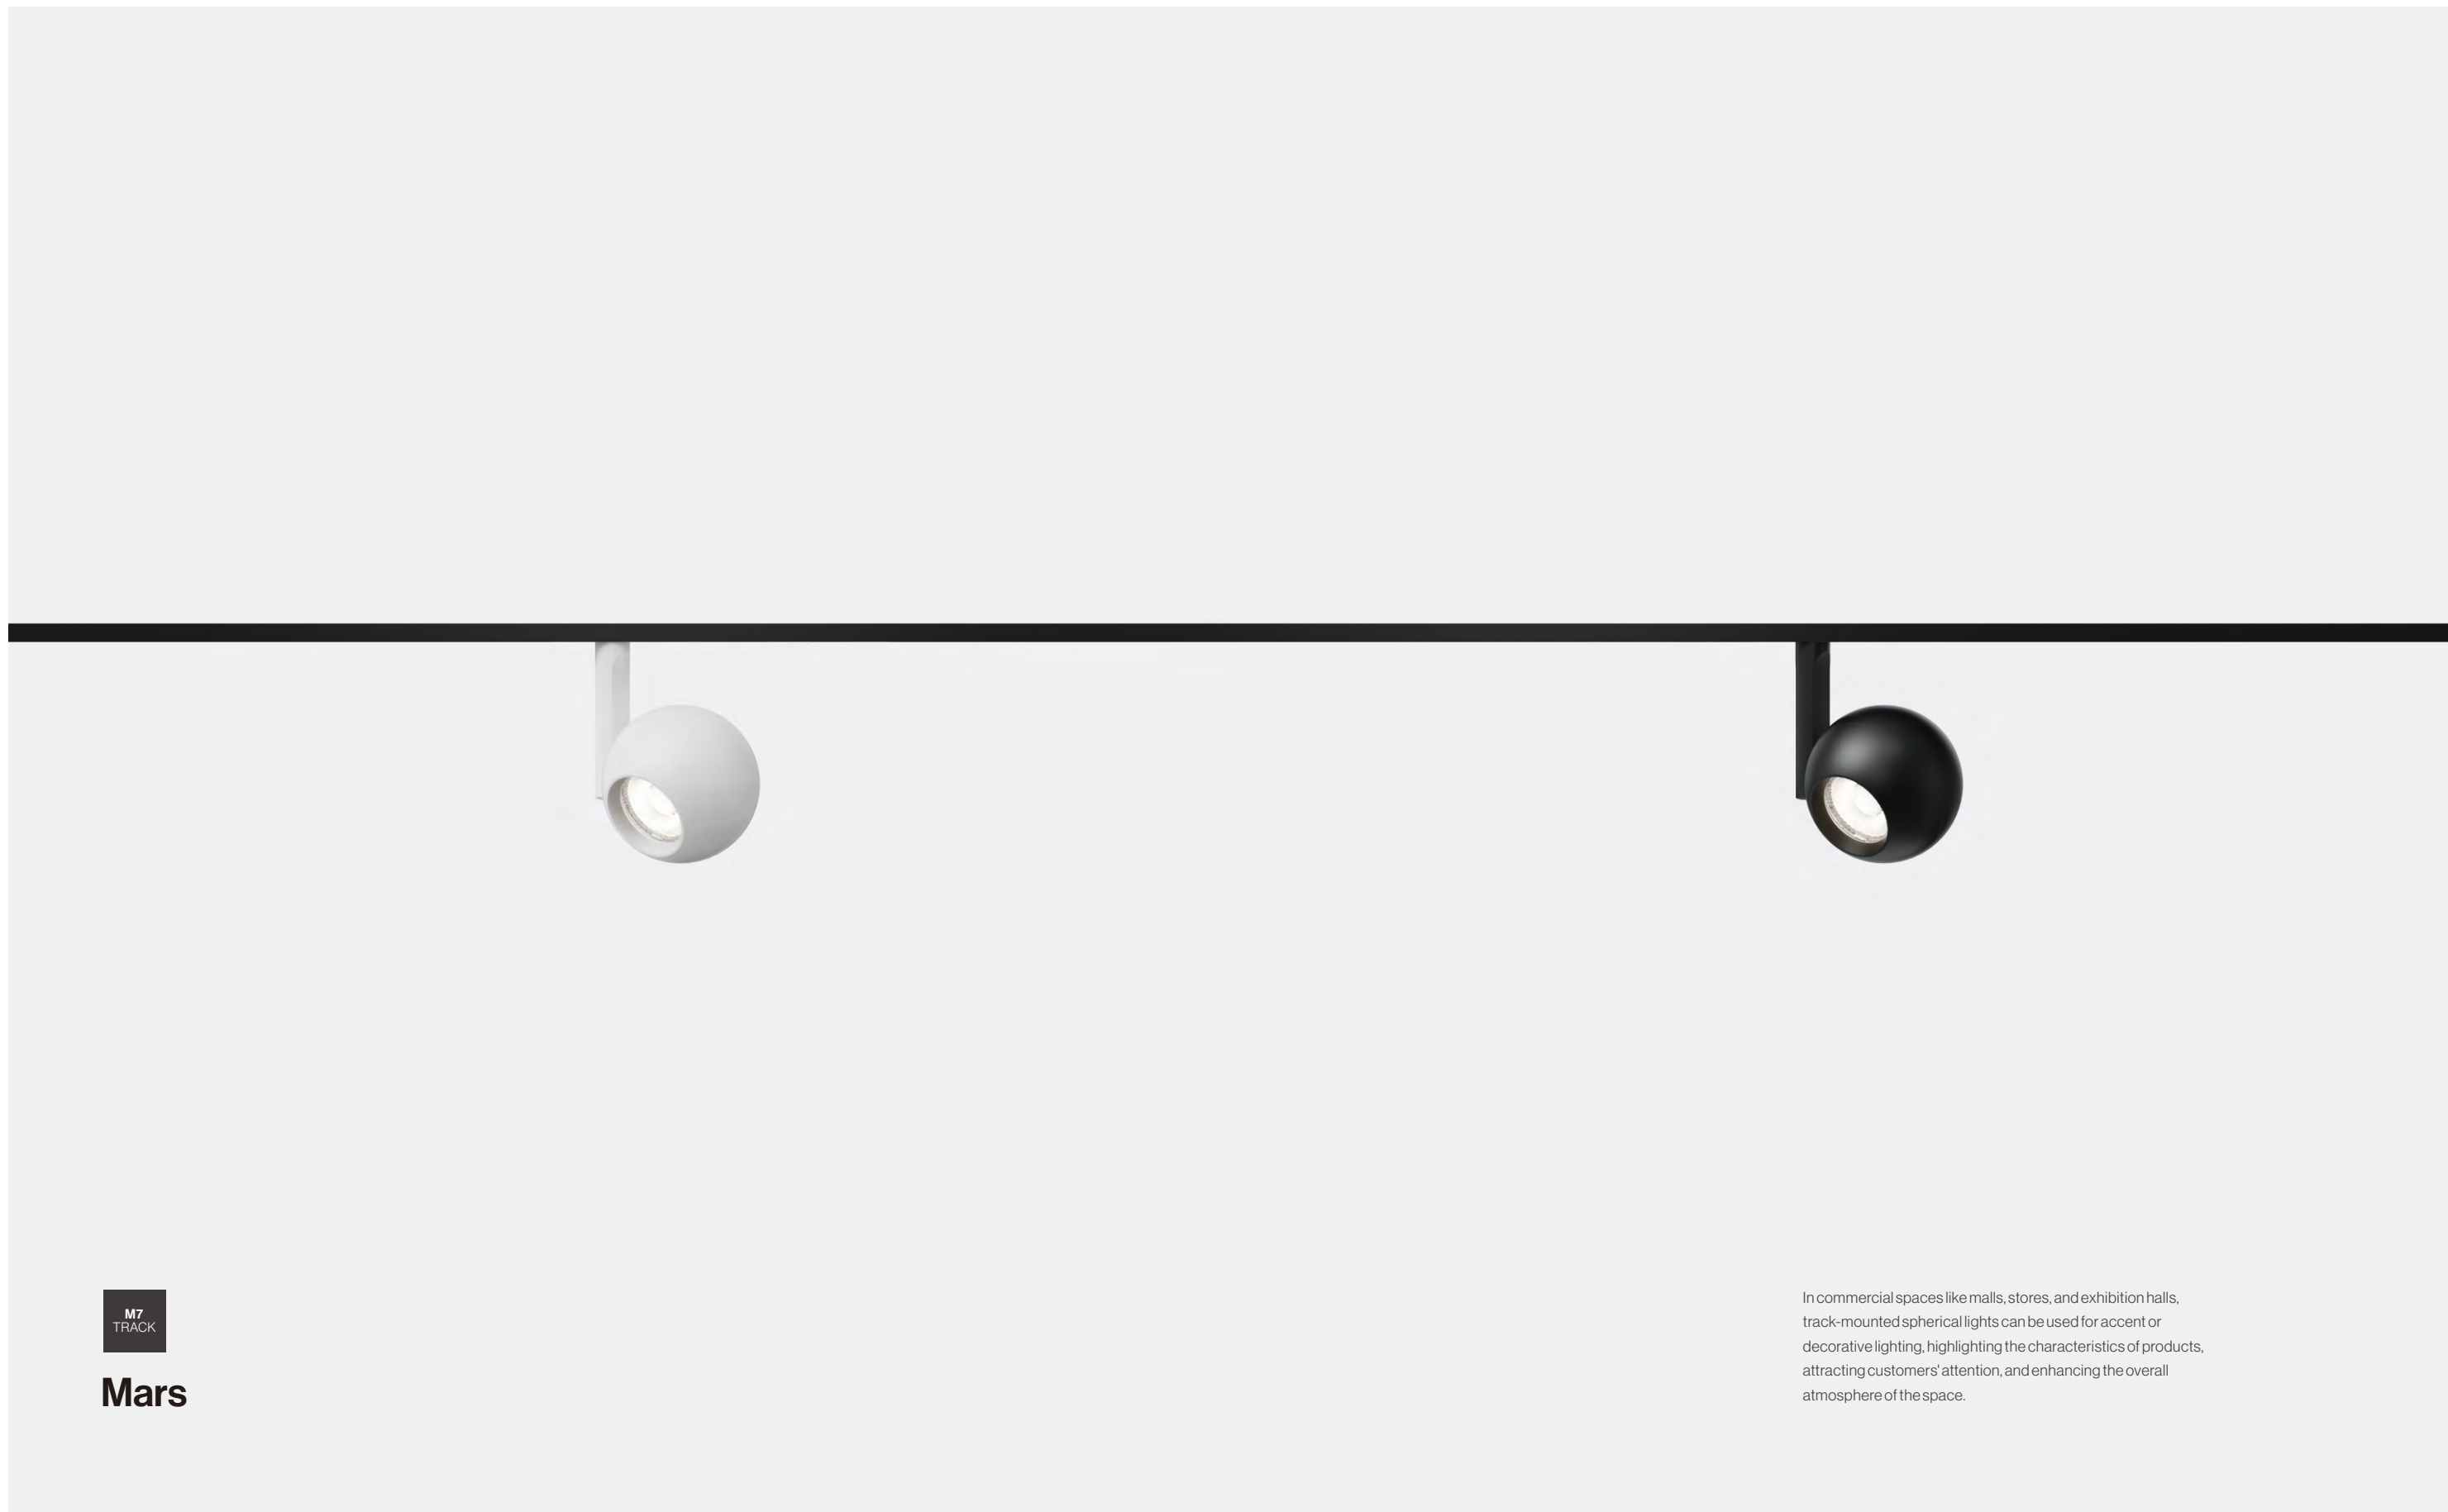

Mars

In commercial spaces like malls, stores, and exhibition halls, track-mounted spherical lights can be used for accent or decorative lighting, highlighting the characteristics of products, attracting customers' attention, and enhancing the overall atmosphere of the space.



M7
TRACK

TO80

Circular Design

If you're looking for a circular design, the TO80 is the perfect choice. With its minimal profile, it seamlessly integrates into any lighting project.

TO80



Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
TO0110	17.021A01000	10W	PWM	Spot	11°	2700K	>90	140	<3
			DALI 2	Medium	24°	3000K	>90	151	<3
			CASAMBI	Flood	36°	3500K	>90	161	<3
				Wide flood	51°	4000K	>90	162	<3
TO0210	17.021B01000	10W		Wallwasher				lm source	

CE

CB

TUV


IP20

DC 48V

COB

90°

270°

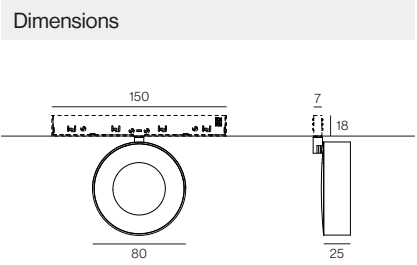







Material Colour	Code
White	F04
Black	F05
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Notice
For other dimming modes and colors, please consult us.



M7 Micro 48V Track System

T080

Color			
Finishes			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.



M7
TRACK

TO60


Pure and High-Quality Versatility

The TO60 presents a unique lighting experience, combining different fixtures with simple geometric shapes and minimalist lines.

TO60



Dimensions

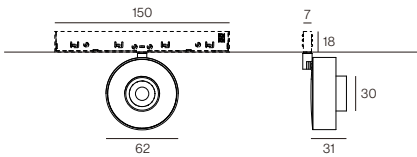

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
TO0308	17.022A01000	8W	PWM	Medium	24°	2700K	>90	140	<3
			DALI 2	Medium	28°	3000K	>90	151	<3
			CASAMBI	Flood	41°	3500K	>90	161	<3
				Wide flood	52°	4000K	>90	162	<3



Material Colour


Material Colour	Code
White	○ F04
Black	● F05
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13

Notice

For other dimming modes and colors, please consult us.









270°
Rotation



90°
Tilt



TO60

Color			
Finishes			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.






Rotate, pull, and twist
to shape your light.

M7
TRACK


Pablo S

M7 Micro 48V Track System

Pablo S

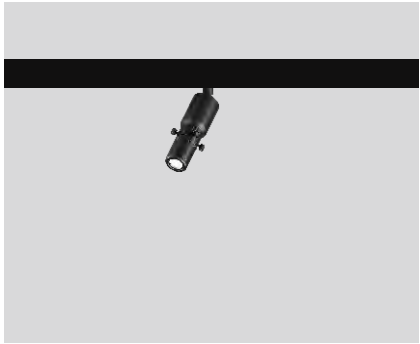

Dimensions

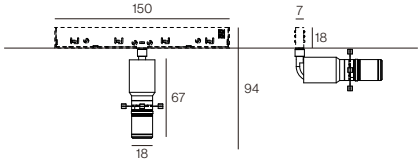

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PS0003	17.019A01000	3W	PWM	Zoom spot	17°-36°	2700K	>90	109	<3
			DALI 2			3000K	>90	114	<3
			CASAMBI			3500K	>90	118	<3
						4000K	>90	121	<3
						lm source			




Material Colour Code

Black ● Y01

Pablo S



Dimensions

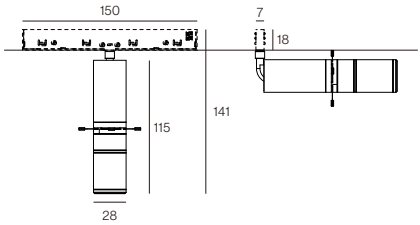

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
PS0106	17.020A01000	6W	PWM	Zoom spot	20°-33°	2700K	>90	109	<3
			DALI 2			3000K	>90	114	<3
			CASAMBI			3500K	>90	118	<3
						4000K	>90	121	<3
						lm source			





Material Colour Code

Black ● Y01


Notice
For other dimming modes and colors,
please consult us.



Pablo S


Color	
Finishes	
	
	<div><div>Y01</div><div>Black</div></div> <div><div>Y01</div><div>Black</div></div>

Notice
For other dimming modes and colors,
please consult us.

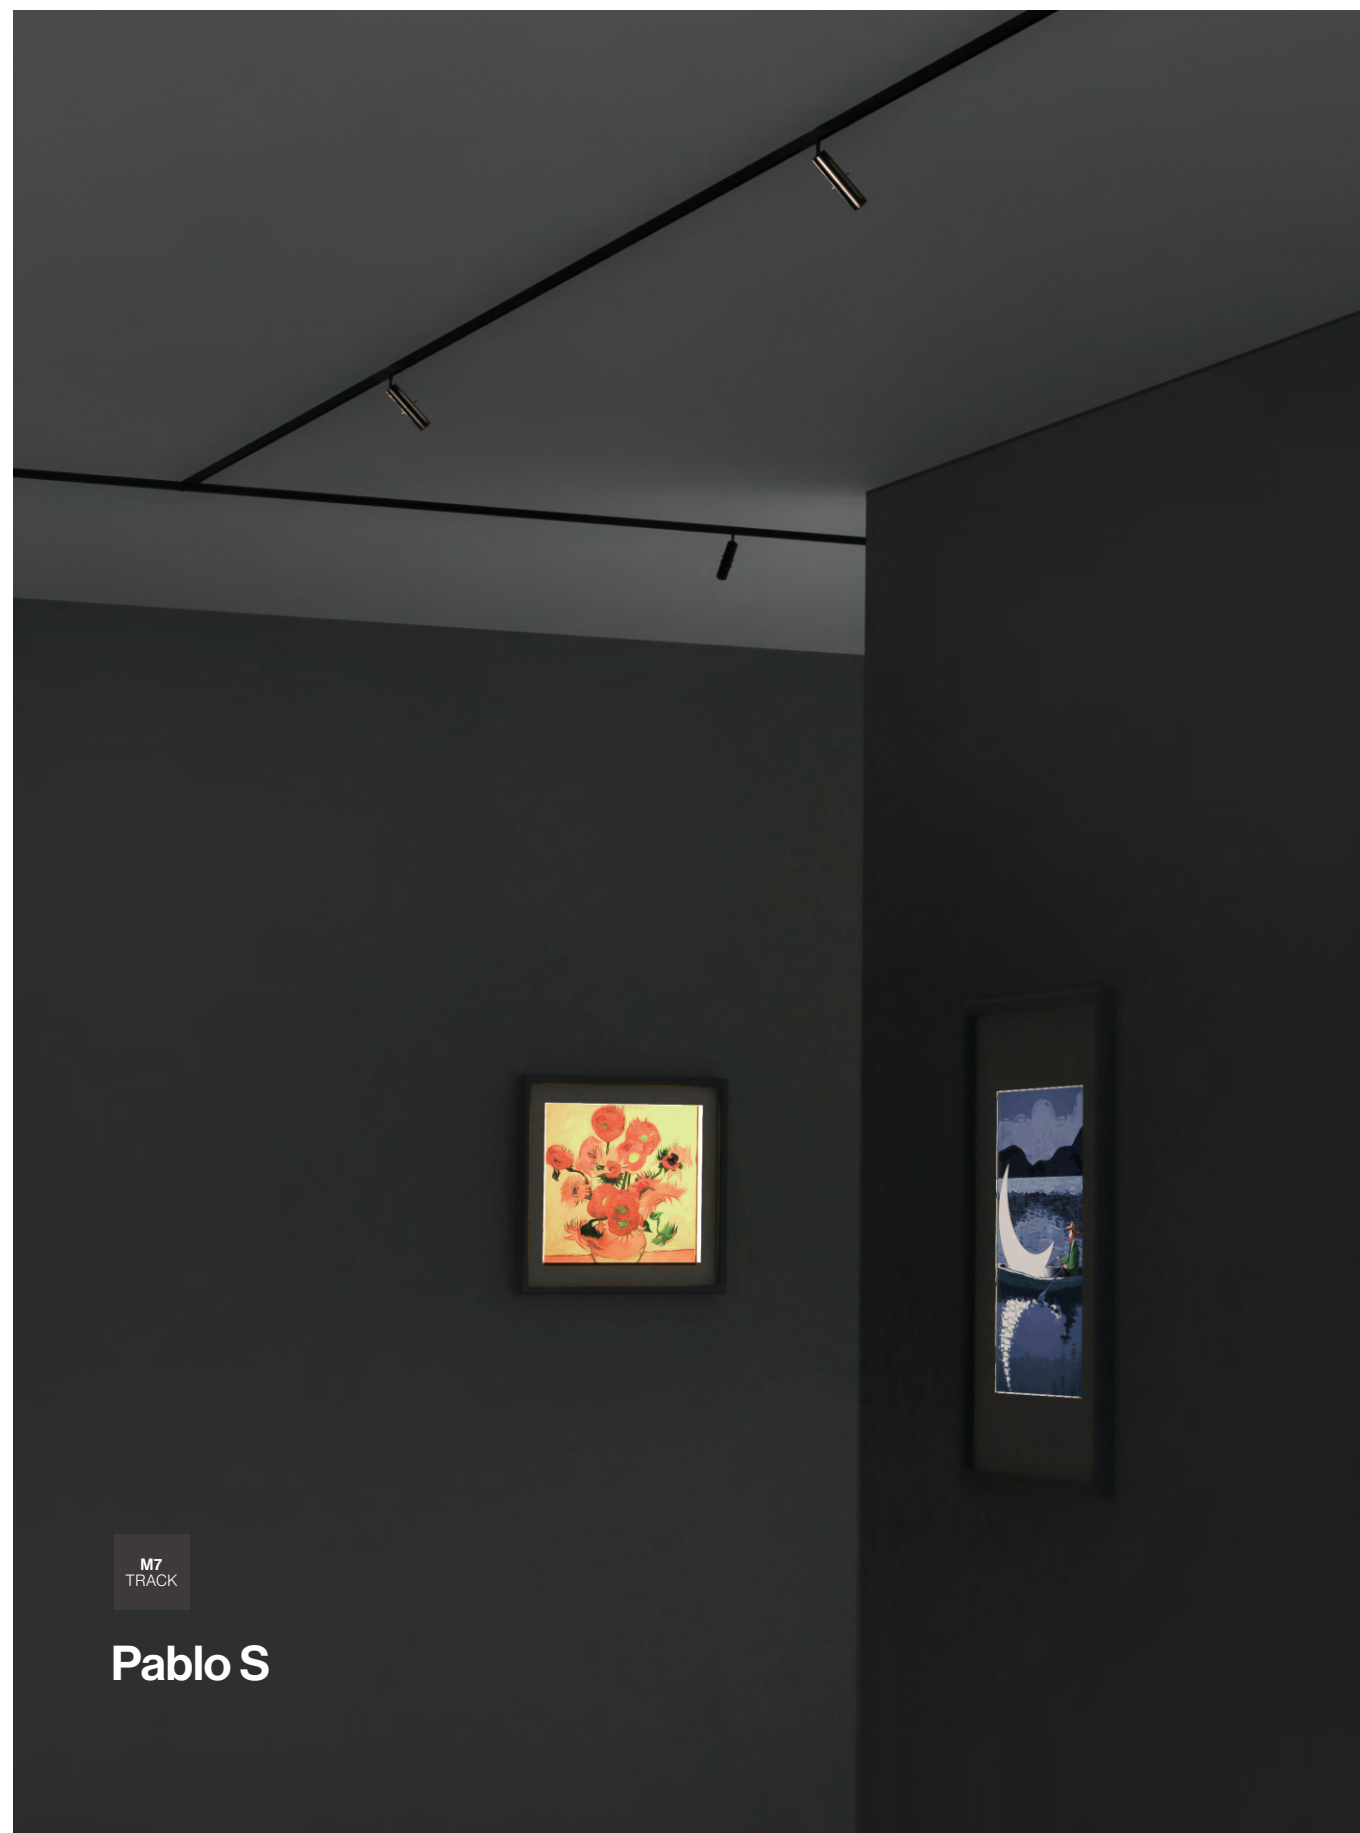

M7
TRACK

Pablo S

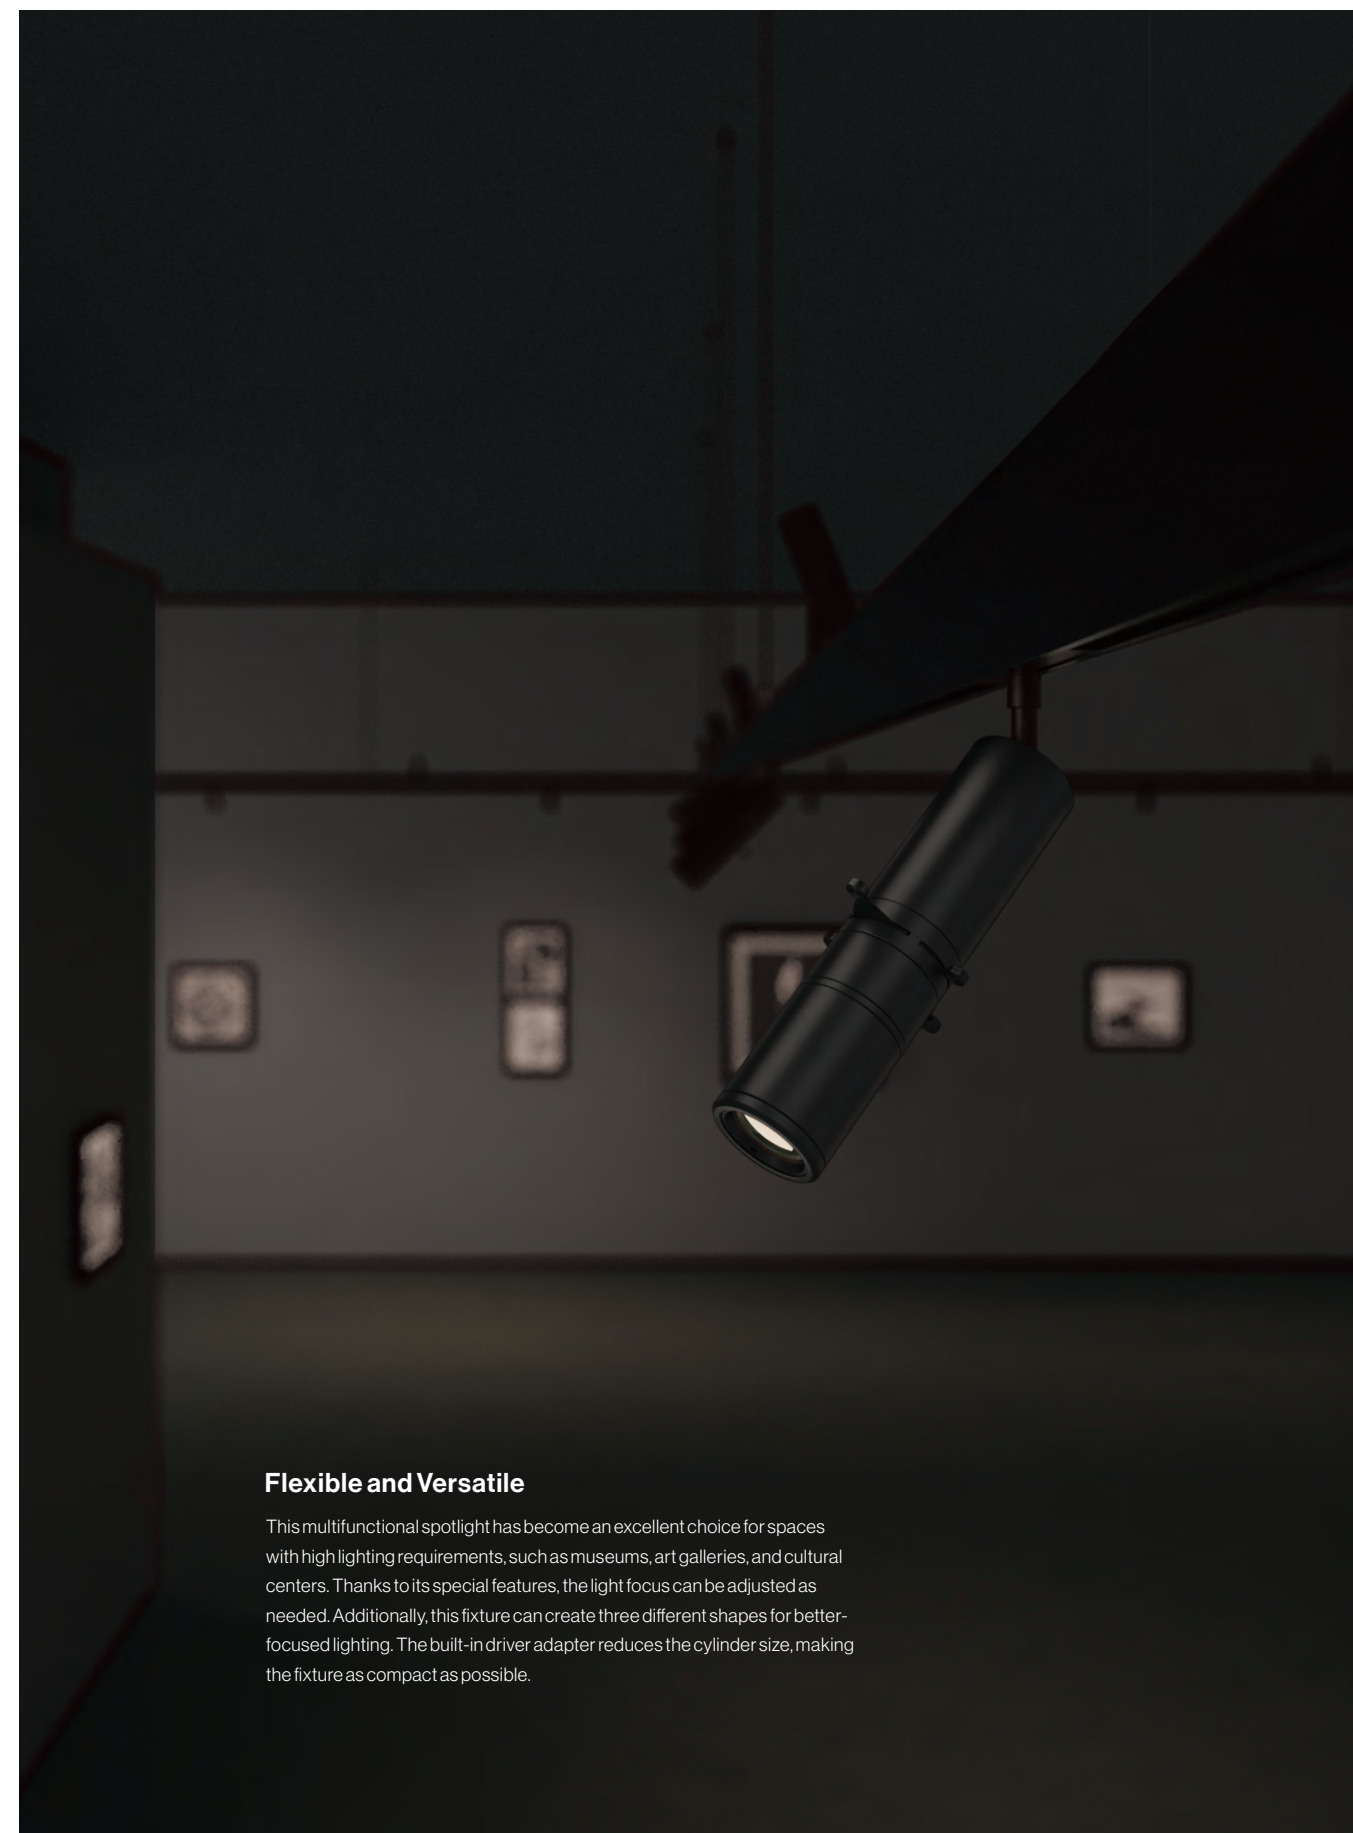

Flexible and Versatile

This multifunctional spotlight has become an excellent choice for spaces with high lighting requirements, such as museums, art galleries, and cultural centers. Thanks to its special features, the light focus can be adjusted as needed. Additionally, this fixture can create three different shapes for better-focused lighting. The built-in driver adapter reduces the cylinder size, making the fixture as compact as possible.



M7
TRACK


Basilisk

While maintaining the DNA of our traditional inline system, this series features new rounded edges and soft, sleek shapes. KClighting offers various track profiles and lighting fixtures online, providing maximum flexibility for lighting projects. All tracks share the same "smart core" and integrate a lighting control database. Wireless control through Dali and Casambi allows for individual control of each fixture.

Basilisk



Dimensions

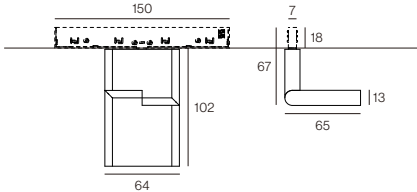

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
BL0006	17.016A04000	6W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	33°	3000K	>90	150	<3
			CASAMBI	Flood	43°	3500K	>90	150	<3
				Wide flood	55°	4000K	>90	169	<3








Material Colour

	Code
Matte White	○ Q01
Matte Black	● Q03
Brushed Bronze	● Y14
Brushed Copper	● Y12
Brushed Steel	● Y15
Brushed Anthracite	● Y13

Notice
For other dimming modes and colors, please consult us.




Basilisk

Color			
Finishes			
			
	Q01 Matte White	Q03 Matte Black	
Special Finishes			
			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.



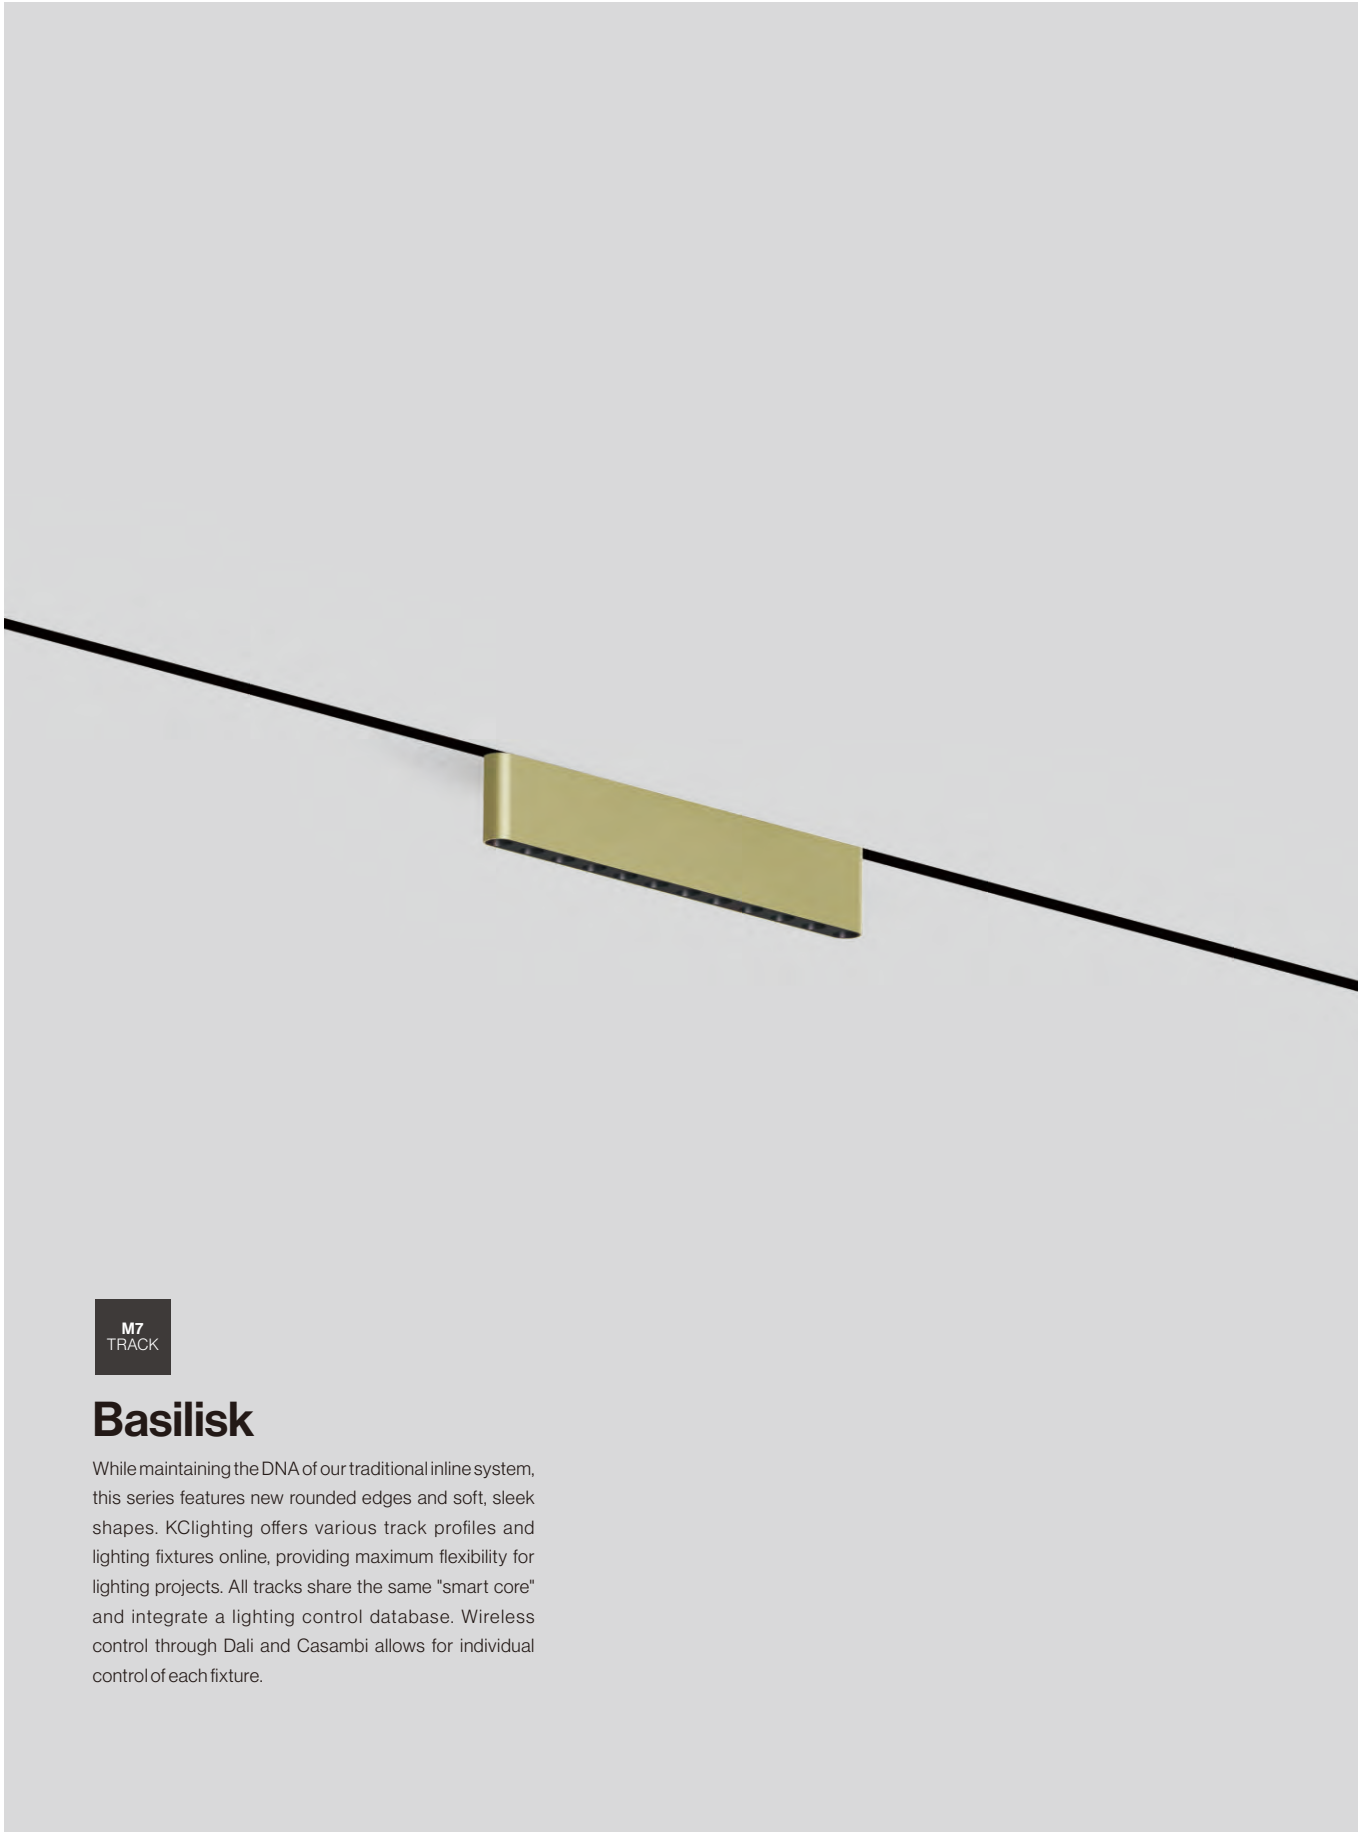

M7
TRACK


Basilisk

While maintaining the DNA of our traditional inline system, this series features new rounded edges and soft, sleek shapes. KClighting offers various track profiles and lighting fixtures online, providing maximum flexibility for lighting projects. All tracks share the same "smart core" and integrate a lighting control database. Wireless control through Dali and Casambi allows for individual control of each fixture.

Basilisk



Dimensions

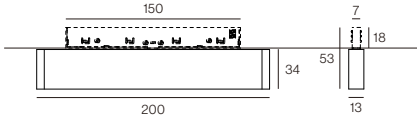

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
BL1010	17.017A12000	10W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	33°	3000K	>90	150	<3
			CASAMBI	Flood	43°	3500K	>90	150	<3
				Wide flood	55°	4000K	>90	169	<3

CE

CB

TUV

IP20

DC 48V


SMD

270°




Material Colour

	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

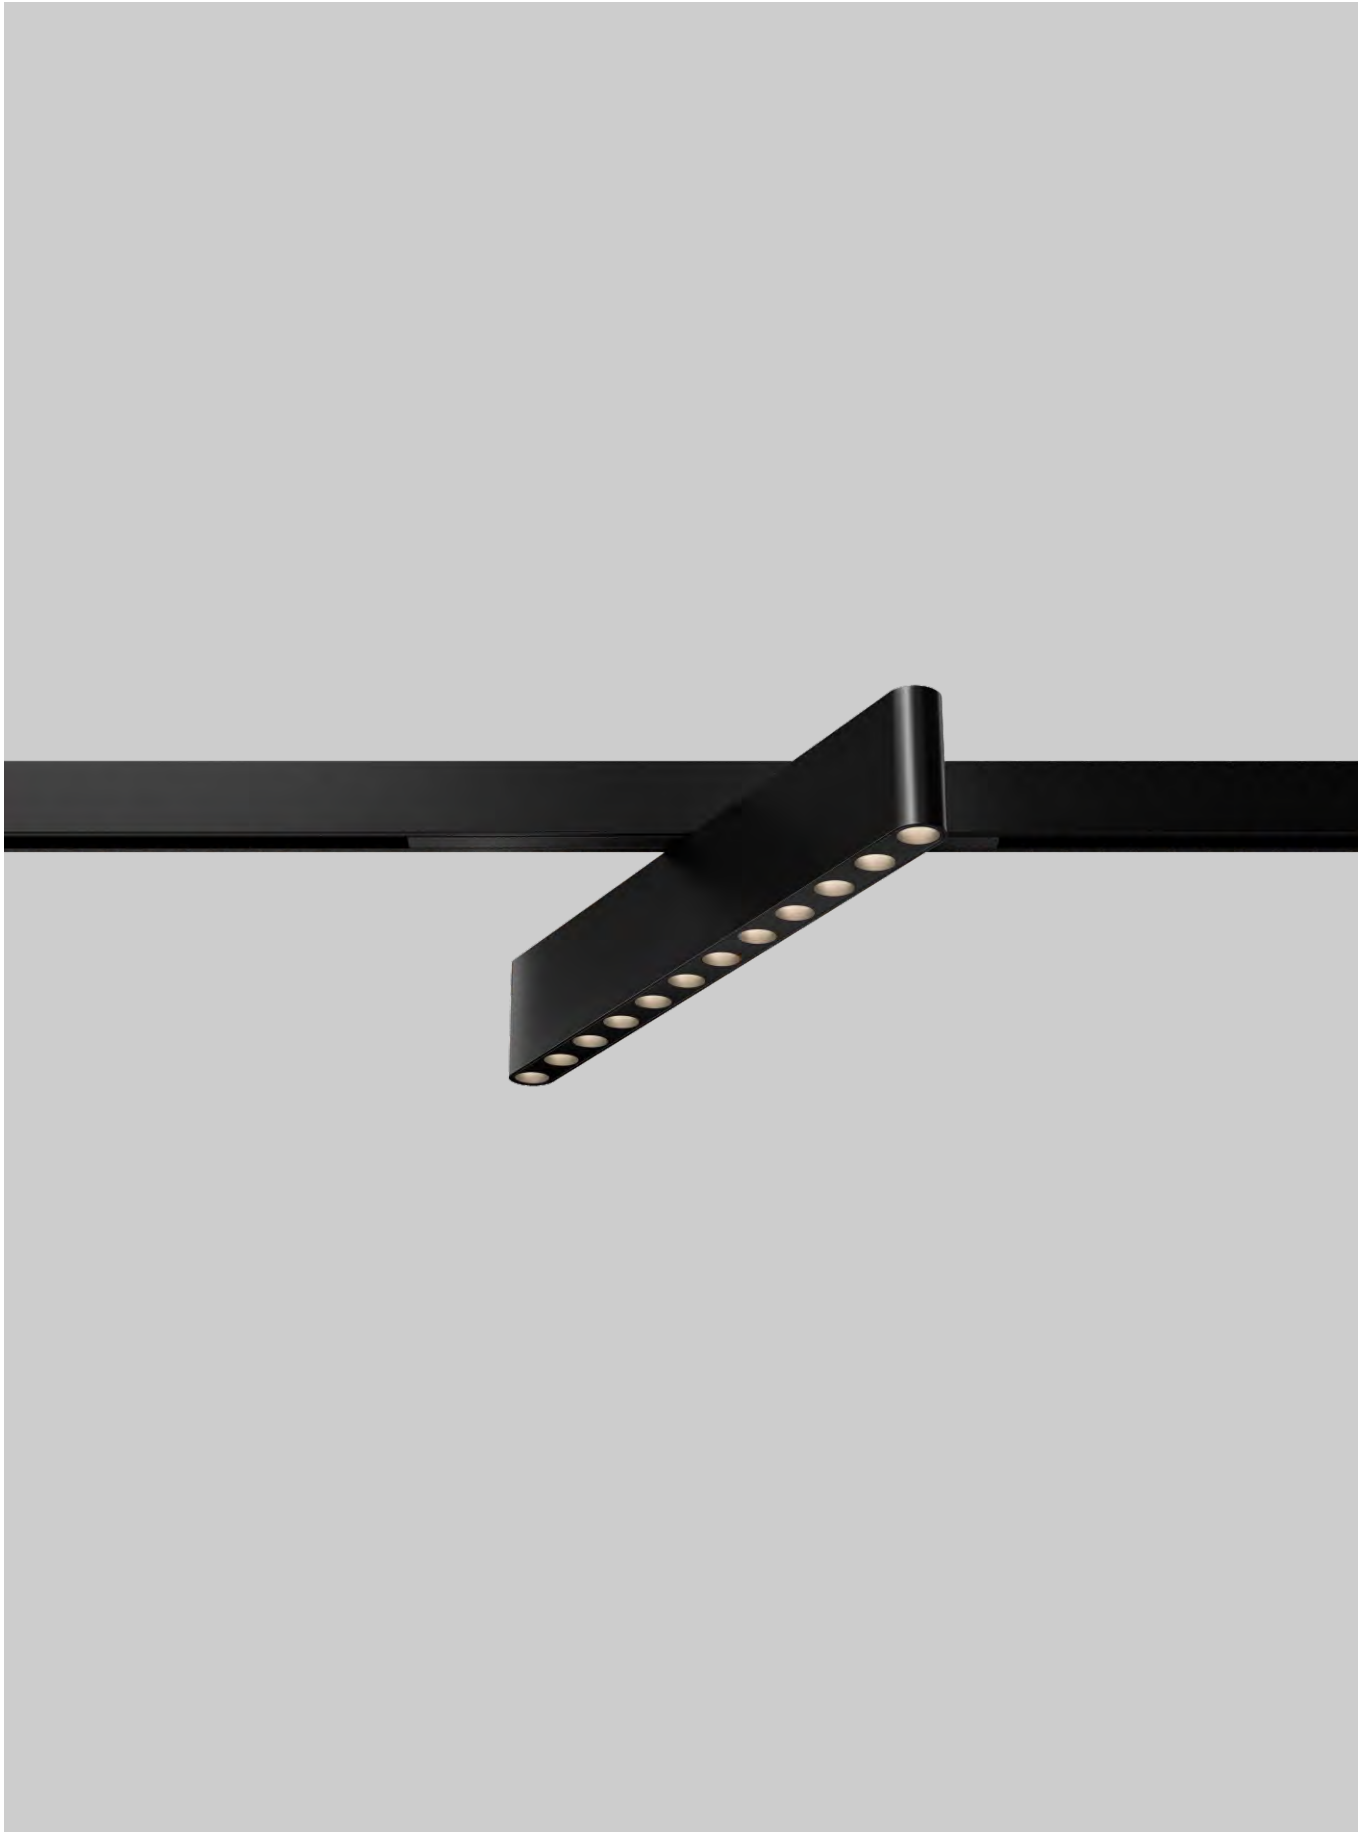Notice
For other dimming modes and colors, please consult us.



Basilisk

Color			
Finishes			
	Q01 Matte White	Q03 Matte Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.






Roller



Dimensions

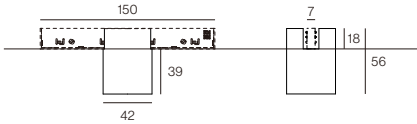


Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
RL0006	17.014A01000	6W	PWM	Spot	15°	2700K	>90	136	<3
			DALI 2	Medium	22°	3000K	>90	148	<3
			CASAMBI	Flood	37°	3500K	>90	159	<3
				Wide flood	50°	4000K	>90	160	<3
									lm source


CE

CB

TUV




IP20



DC 48V

COB




Material Colour	Code	
White		F04
Black		F05
Brushed Bronze		Y14
Brushed Copper		Y12
Brushed Steel		Y15
Brushed Anthracite		Y13

Roller



Dimensions

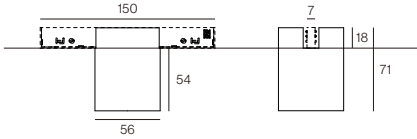


Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
RL0108	17.014A02000	8W	PWM	Spot	14°	2700K	>90	98	<3
			DALI 2	Medium	28°	3000K	>90	105	<3
			CASAMBI	Flood	37°	3500K	>90	107	<3
				Wide flood	60°	4000K	>90	110	<3
									lm source


CE

CB

TUV




IP20



DC 48V

COB



Material Colour	Code	
White		F04
Black		F05
Brushed Bronze		Y14
Brushed Copper		Y12
Brushed Steel		Y15
Brushed Anthracite		Y13

Notice
For other dimming modes and colors, please consult us.









M7
TRACK

Roller

Cylindrical


A cylindrical fixture with a narrow light angle, designed for focused lighting in recessed applications.

Roller

Color			
Finishes			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors, please consult us.




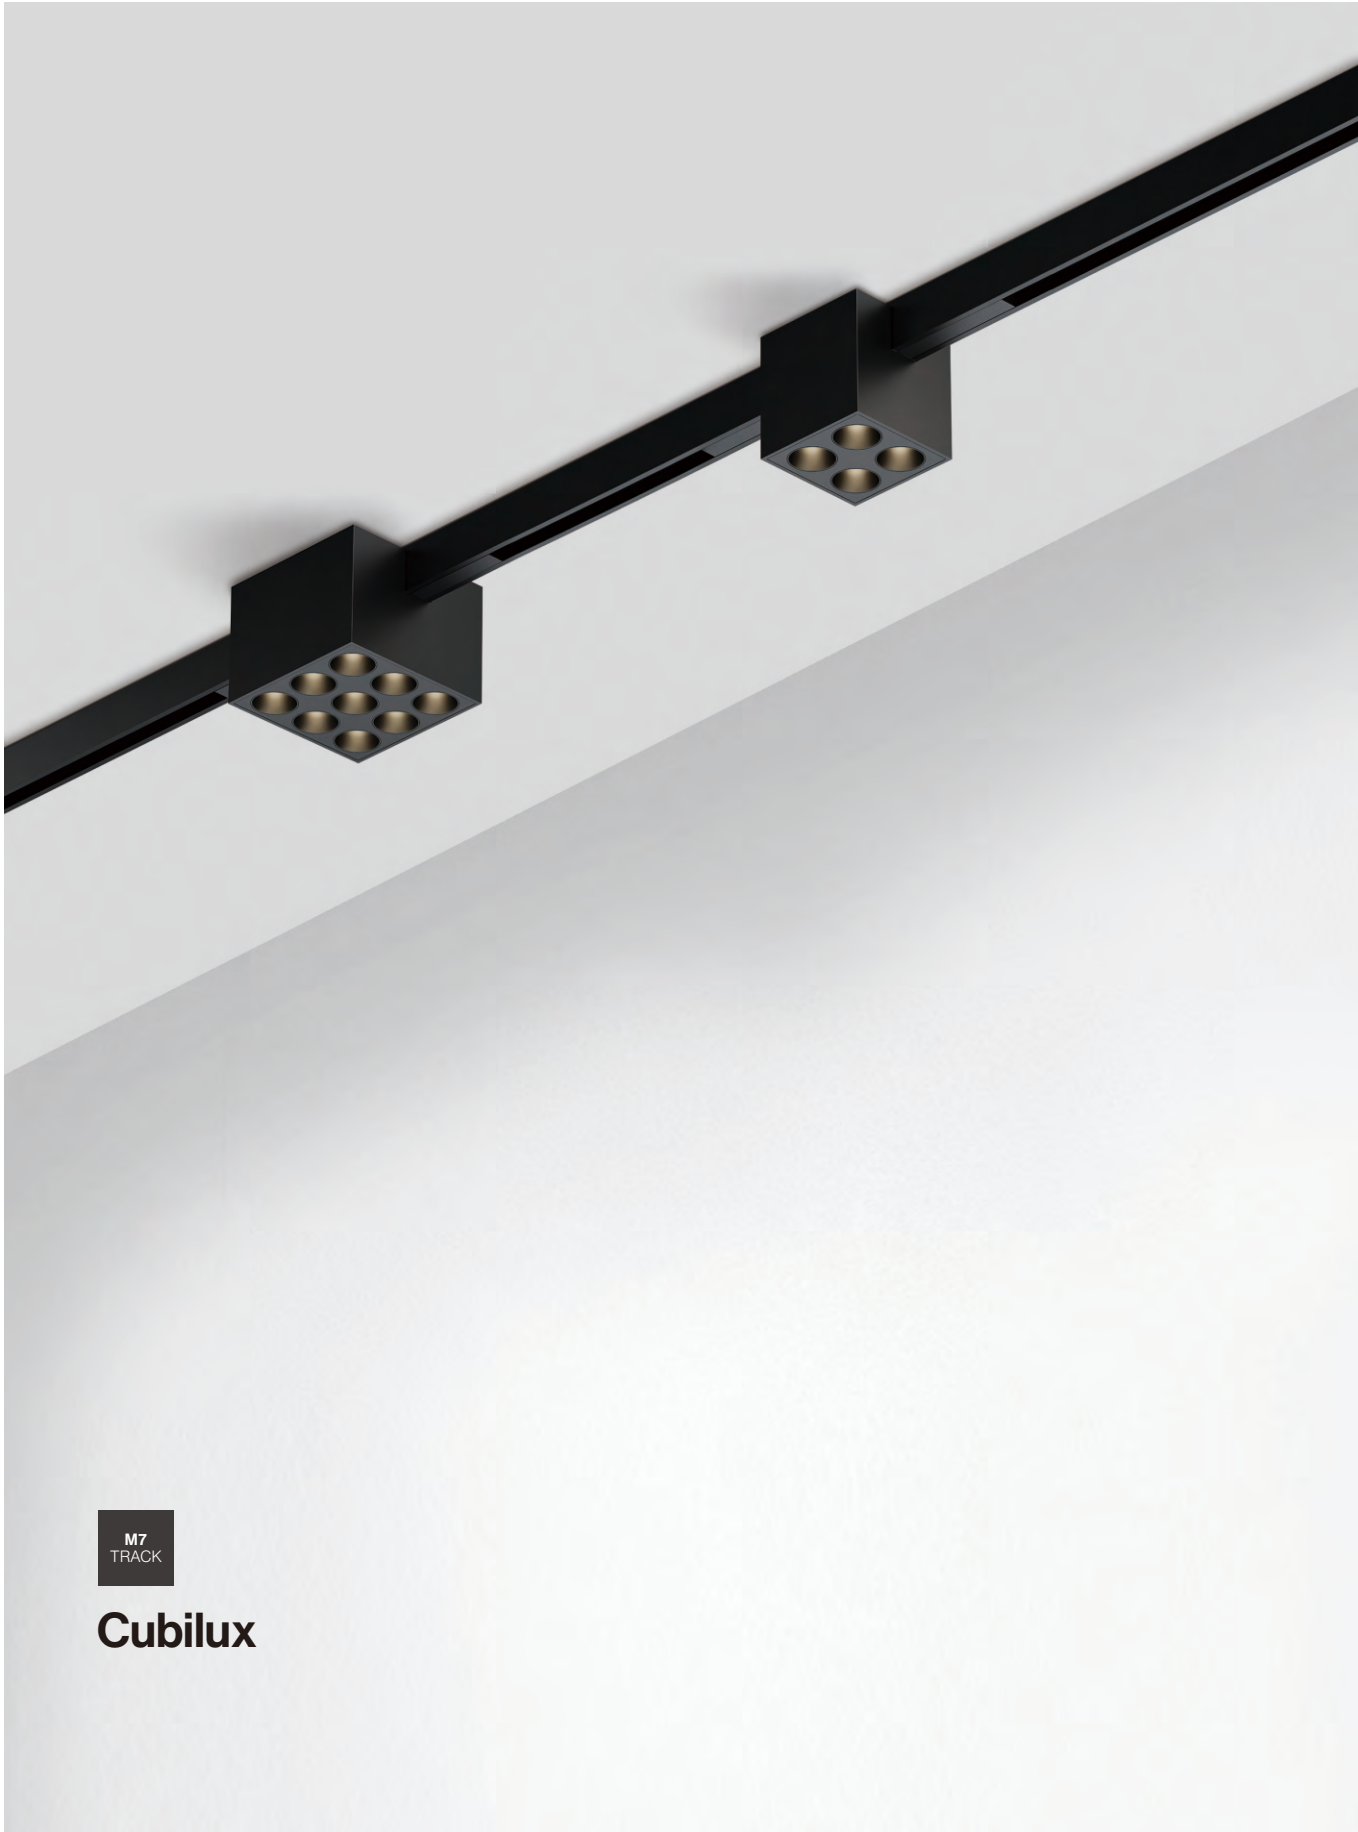


M7
TRACK

Cubilux

Cubilux

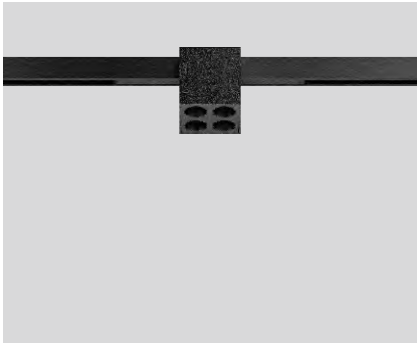

Dimensions

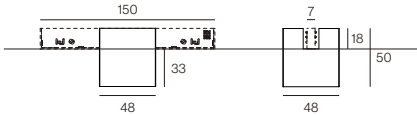


Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM	
CB0006	17.015A04000	6W	PWM	Medium	34°	2700K	>90	134	<3	
			DALI 2	Wide flood	48°	3000K	>90	150	<3	
			CASAMBI		3500K	>90	150	<3		
					4000K	>90	169	<3		
								lm source		


CE

CB

TUV




IP20




DC 48V

SMD




Material Colour	Code	
White		F04
Black		F05
Brushed Bronze		Y14
Brushed Copper		Y12
Brushed Steel		Y15
Brushed Anthracite		Y13

Cubilux

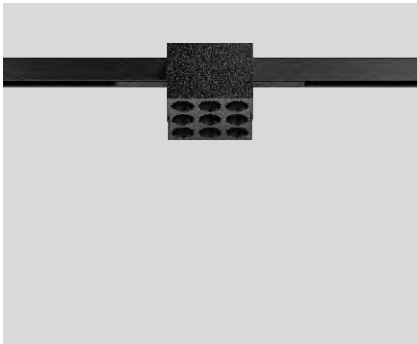

Dimensions

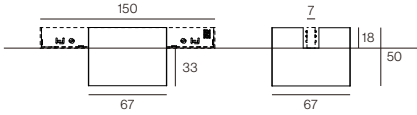


Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
CB0110	17.015A09000	10W	PWM	Medium	34°	2700K	>90	134	<3
			DALI 2	Wide flood	48°	3000K	>90	150	<3
			CASAMBI		3500K	>90	150	<3	
					4000K	>90	169	<3	
								lm source	


CE

CB

TUV




IP20



DC 48V

SMD



Material Colour	Code	
White		F04
Black		F05
Brushed Bronze		Y14
Brushed Copper		Y12
Brushed Steel		Y15
Brushed Anthracite		Y13





Notice
For other dimming modes and colors,
please consult us.




Cube Shape

Plug-and-play fixtures simplify the planning and installation process and ensure effortless system maintenance. They are easy to install on surface-mounted tracks and can be immediately connected to power.

Cubilux

Color			
Finishes			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors, please consult us.

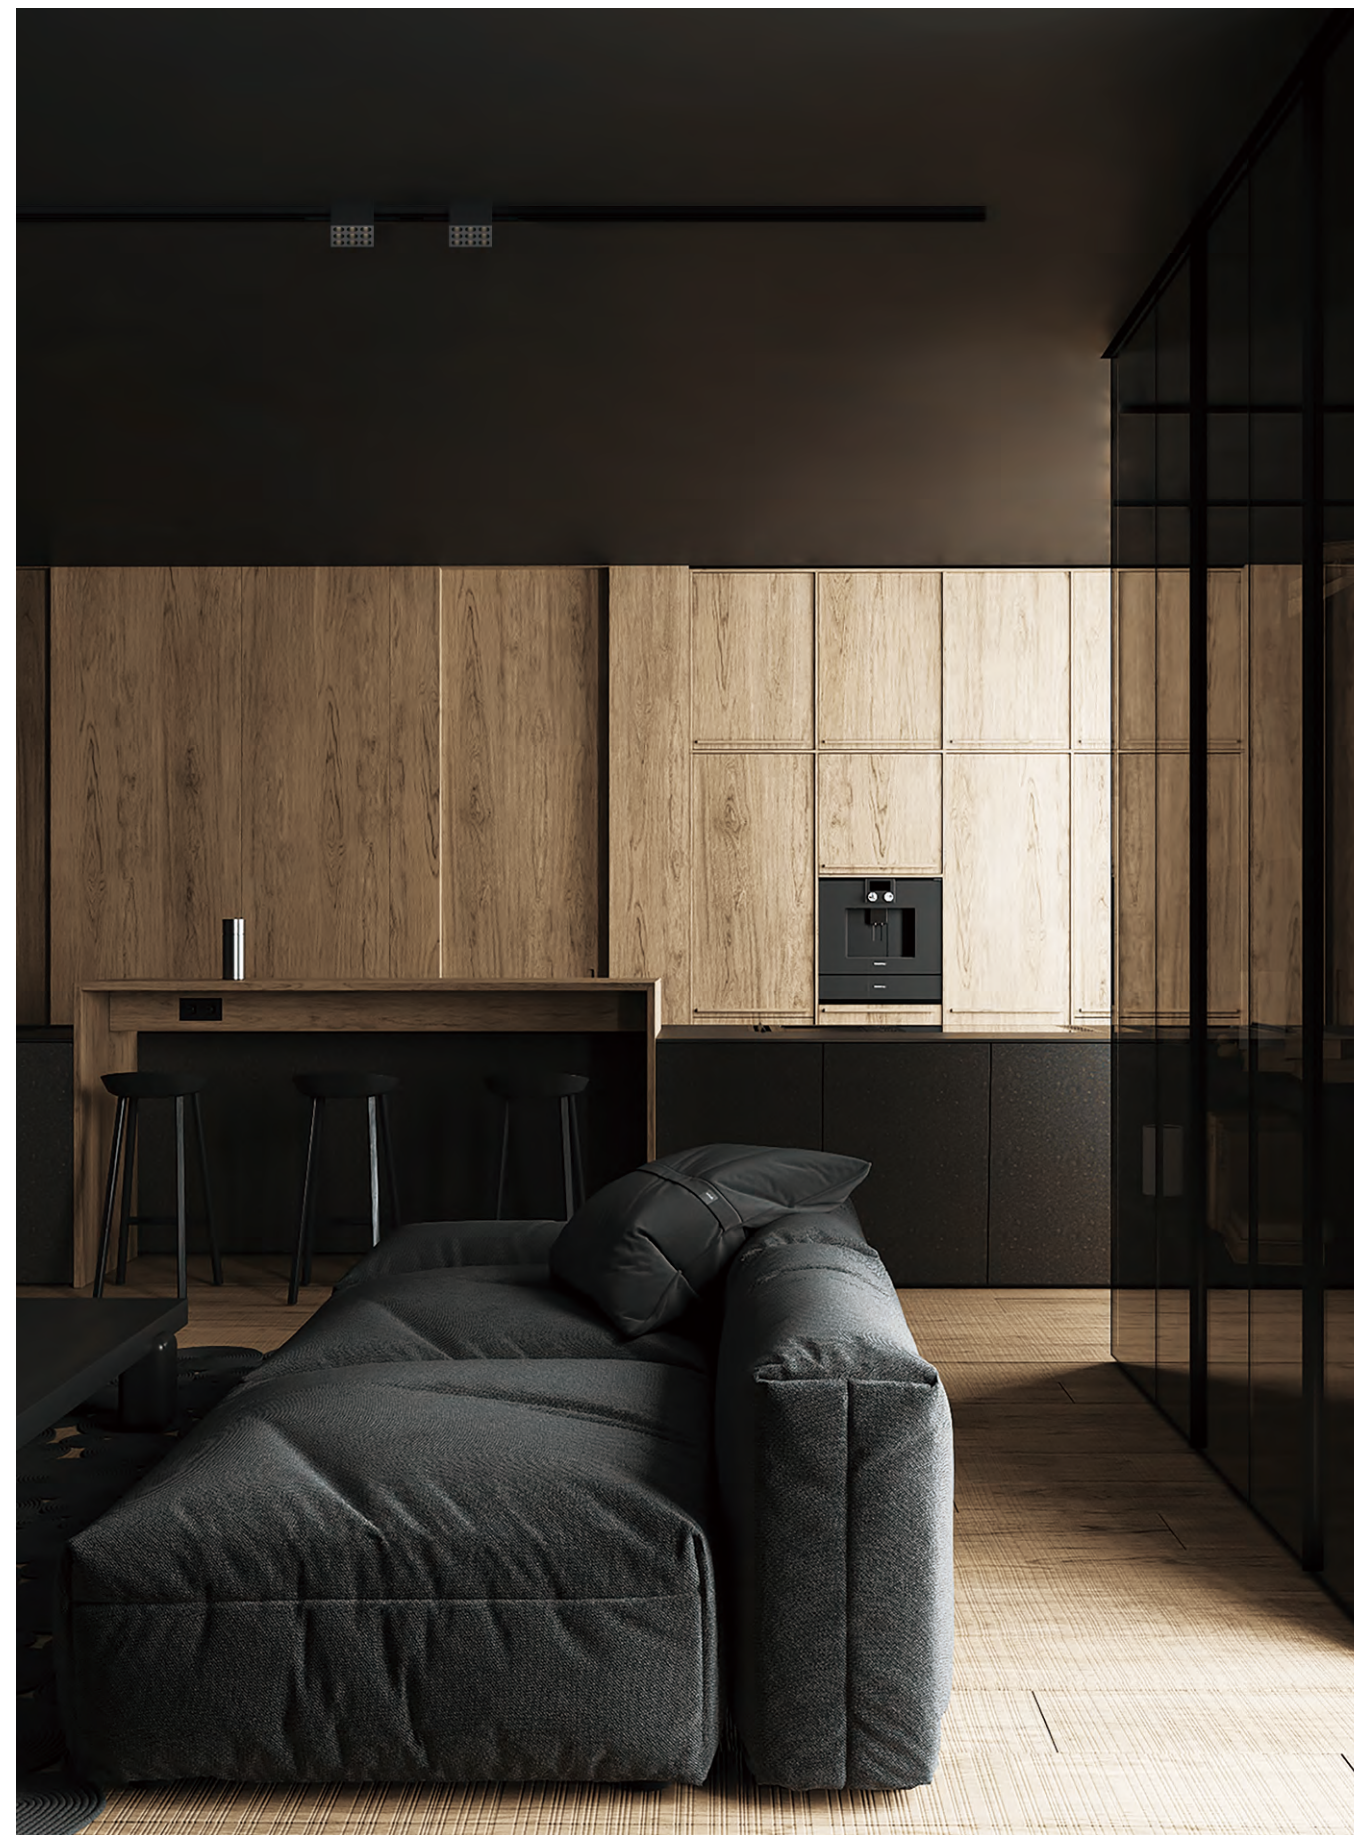



M7
TRACK


Lotus

Lotus adapts to your vision like a blooming flower. Offering the flexibility of trim, timeless and trim-adjustable mounting options, this innovative fixture integrates seamlessly into your space. Available in both sleek square and contemporary rectangular styles, Lotus caters to a variety of design aesthetics.

Lotus




Dimensions



Lotus



Dimensions

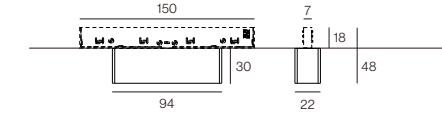

Notice
For other dimming modes and colors,
please consult us.


Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
LT0005	17.237D03000	5W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
						4000K	>90	169	<3
						lm source			


CE

CB

TUV




IP20



DC 48V

SMD



Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13


CE	CB	TÜV	IP20	III	DC 48V	SMD
----	----	-----	------	-----	--------	-----

Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Lotus



Dimensions

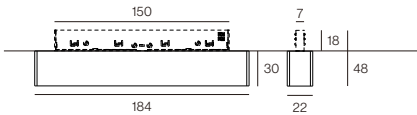


Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
LT0415	17.237D10000	15W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
						4000K	>90	169	<3
						lm source			


CE

CB

TUV




IP20



DC 48V

SMD









Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Notice
For other dimming modes and colors,
please consult us.



Lotus

Color		
Finishes		
		
	F04 White	F05 Black
Special Finishes		
		
	Y14 Brushed Bronze	Y12 Brushed Copper
		
		Y15 Brushed Steel
		
	Y13 Brushed Anthracite	

Notice
For other dimming modes and colors,
please consult us.




M7
TRACK

Lotus

Lotus



Dimensions

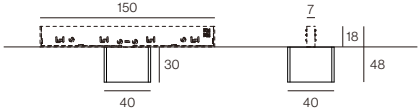

Data

Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
LT0107	17.237D04000	6.5W	PWM	Medium 27°	2700K	>90	134	<3
			DALI 2	Flood 38°	3000K	>90	150	<3
			CASAMBI	Wide flood 50°	3500K	>90	150	<3
					4000K	>90	169	<3

Im source

CE

CB

TUV

IP20

DC 48V

SMD

Material Colour


Code

White		F04
Black		F05
Brushed Bronze		Y14
Brushed Copper		Y12
Brushed Steel		Y15
Brushed Anthracite		Y13

Lotus



Dimensions

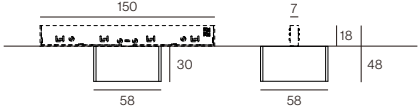

Data

Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
LT0314	17.237D09000	14W	PWM	Medium 27°	2700K	>90	134	<3
			DALI 2	Flood 38°	3000K	>90	150	<3
			CASAMBI	Wide flood 50°	3500K	>90	150	<3
					4000K	>90	169	<3

Im source

CE

CB

TUV

IP20

DC 48V

SMD

Material Colour

Code







White		F04
Black		F05
Brushed Bronze		Y14
Brushed Copper		Y12
Brushed Steel		Y15
Brushed Anthracite		Y13

Notice
For other dimming modes and colors,
please consult us.




M7 Micro 48V Track System

Lotus

Color			
Finishes			
			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.

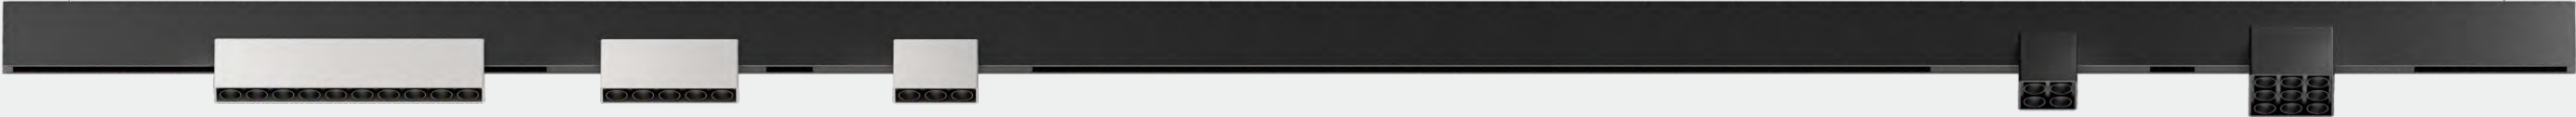

M7
TRACK

Lotus

Lotus adapts to your vision like a blooming flower. Offering the flexibility of trim, timeless and trim-adjustable mounting options, this innovative fixture integrates seamlessly into your space. Available in both sleek square and contemporary rectangular styles, Lotus caters to a variety of design aesthetics.

Lotus




Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
LT1005	17.237U03000	5W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
						4000K	>90	169	<3
						lm source			


CE

CB

TUV




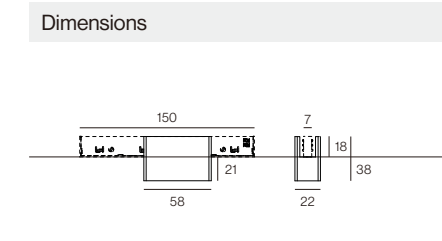
IP20



DC 48V

SMD





Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Lotus




Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
LT1208	17.237U05000	8W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
						4000K	>90	169	<3
						lm source			


CE

CB

TUV




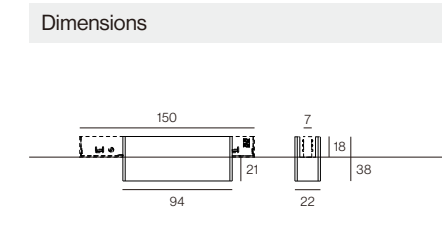
IP20



DC 48V

SMD






Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Notice
For other dimming modes and colors, please consult us.

Lotus

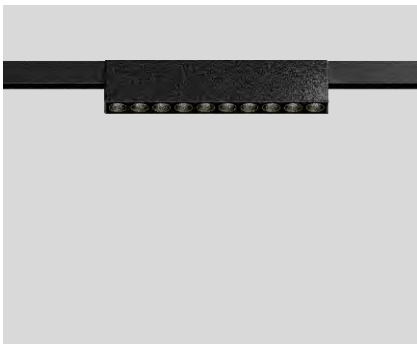


Data									
Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
LT1415	17.237U10000	15W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
						4000K	>90	169	<3
						lm source			


CE

CB

TUV




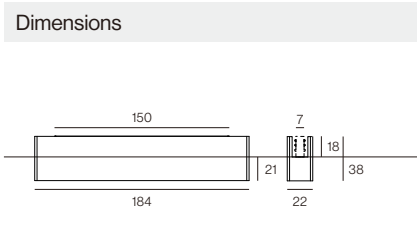
IP20



DC 48V

SMD





Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13


Notice
For other dimming modes and colors, please consult us.




Lotus

Color			
Finishes			
			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.

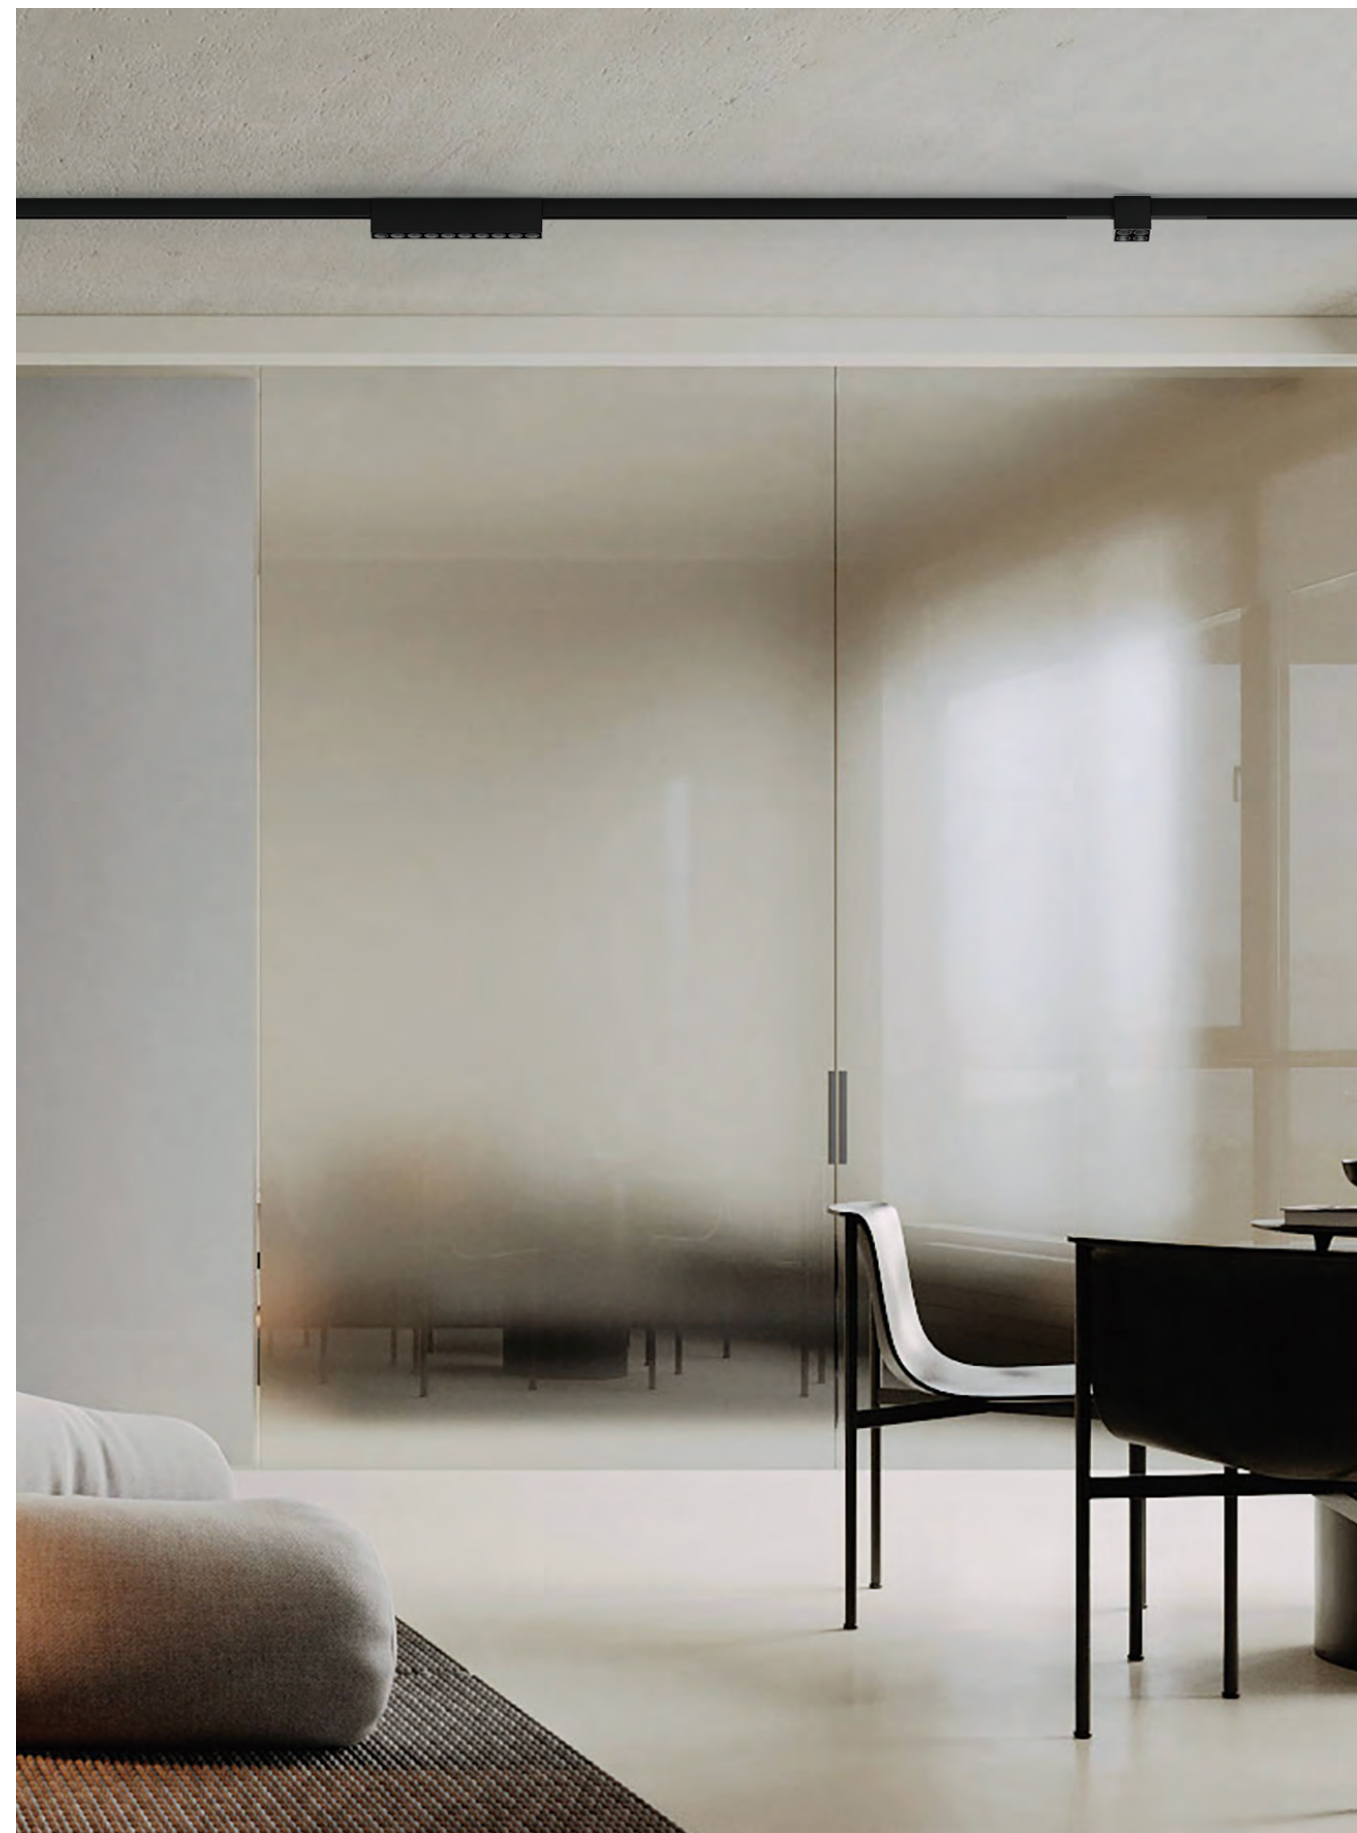

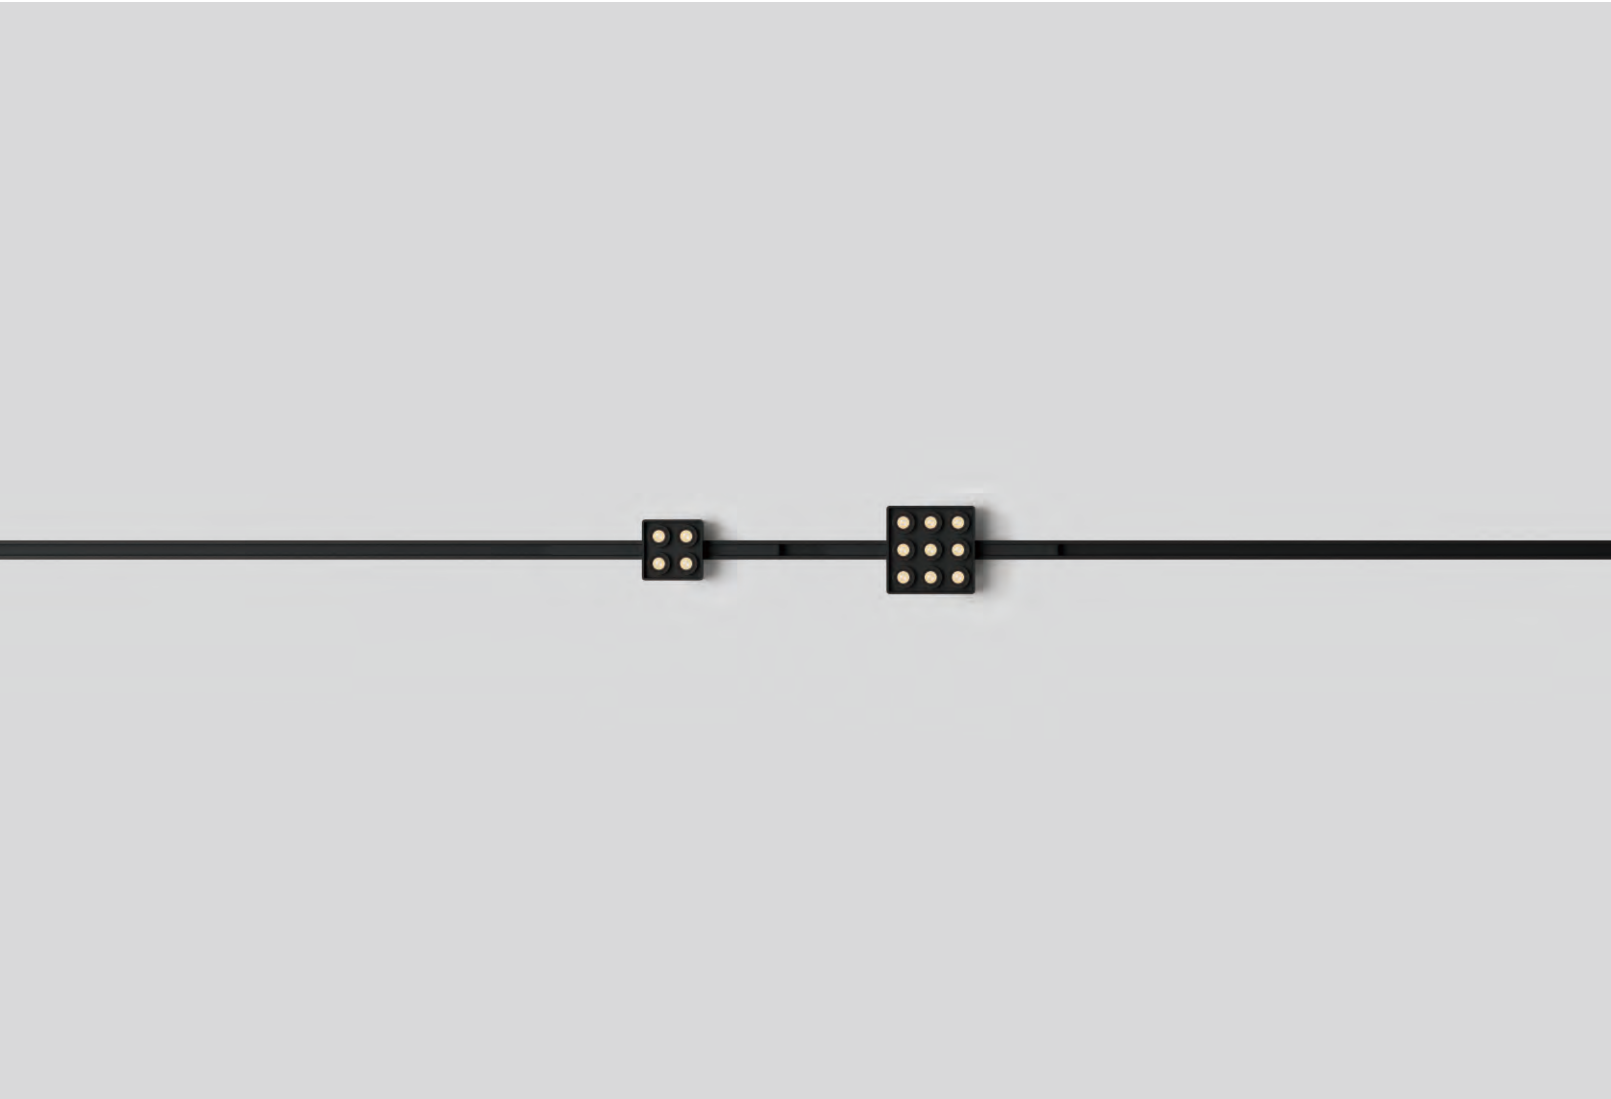


M7
TRACK

Lotus

Lotus



Dimensions

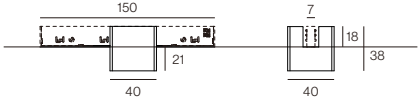

Data

Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM	
LT1107	17.237U04000	6.5W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
					4000K	>90	169	<3	

Im source

CE

CB

TUV

IP20

DC 48V

SMD

Material Colour	Code
White	F04
Black	F05
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Lotus



Dimensions



Data

Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM	
LT1314	17.237U09000	14W	PWM	Medium	27°	2700K	>90	134	<3
			DALI 2	Flood	38°	3000K	>90	150	<3
			CASAMBI	Wide flood	50°	3500K	>90	150	<3
					4000K	>90	169	<3	

Im source

CE

CB

TUV

IP20

DC 48V

SMD







Material Colour	Code
White	F04
Black	F05
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Notice
For other dimming modes and colors,
please consult us.



M7 Micro 48V Track System

Lotus

Color					
Finishes					
	F04 White			F05 Black	
Special Finishes					
	Y14 Brushed Bronze			Y12 Brushed Copper	Y15 Brushed Steel
					
Y13 Brushed Anthracite					

Notice
For other dimming modes and colors,
please consult us.



Cone




Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
CN0010	17.018B01000	10W	PWM	Spot	20°	2700K	>90	140	<3
			DALI 2	Medium	28°	3000K	>90	151	<3
			CASAMBI	Flood	42°	3500K	>90	161	<3
				Wide flood	52°	4000K	>90	162	<3
									lm source


CE

CB

TUV




IP20




DC 48V

COB



Dimensions

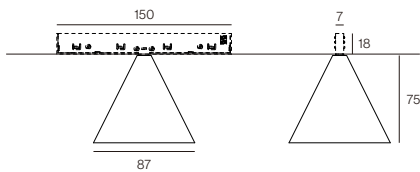

Material Colour







Material Colour		Code
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13

Notice
For other dimming modes and colors, please consult us.



M7 Micro 48V Track System

Cone

Color			
Finishes			
			
	F04 White	F05 Black	
Special Finishes			
			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.





M7
TRACK

Nod

Nod series combines powerful lighting with advanced LED technology. Its modern and minimalist design makes it suitable for any residential or commercial space.




M7 Micro 48V Track System

Nod



Dimensions

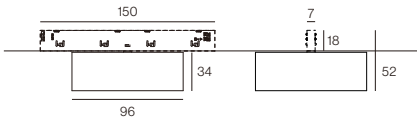

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM
ND0015	17.038A01000	15W	PWM	General lighting	75°	2700K	>90	158	<3
			DALI 2			3000K	>90	160	<3
			CASAMBI			3500K	>90	161	<3
						4000K	>90	165	<3

CE

CB

TUV

IP20

DC 48V


SMD

Material Colour	Code
White	F04
Black	F05
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Nod



Dimensions

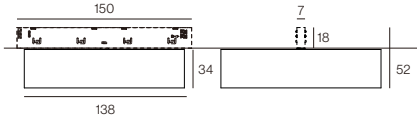

Data

Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
ND0120	17.039A01000	20W	PWM	General lighting 82°	2700K	>90	158	<3
			DALI 2		3000K	>90	160	<3
			CASAMBI		3500K	>90	161	<3
					4000K	>90	165	<3
							lm source	

CE

CB

TUV

IP20

DC 48V







SMD

Material Colour	Code
White	F04
Black	F05
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Notice
For other dimming modes and colors,
please consult us.



Nod

Color			
Finishes			
			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		

Notice
For other dimming modes and colors,
please consult us.



M7
TRACK

Marmar

A suspended light capsule that fuses timeless natural beauty with modern sophistication. Crafted with genuine marble on one side and precision-finished aluminum on the other, Marmar is more than just a light; it's a statement piece that transforms any space. Its innovative design blends organic textures with sleek geometry, elevating interiors with a refined touch of luxury and artistry. Experience how Marmar redefines ambient lighting, merging classic elegance with contemporary flair.

Marmar




Data							
Model No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
MM0008	8W	PWM	Spherical light	2700K	>90	140	<3
		DALI 2		3000K	>90	151	<3
		CASAMBI		3500K	>90	161	<3
				4000K	>90	162	<3


CE

CB

TUV




IP20




DC 48V

COB





Dimensions

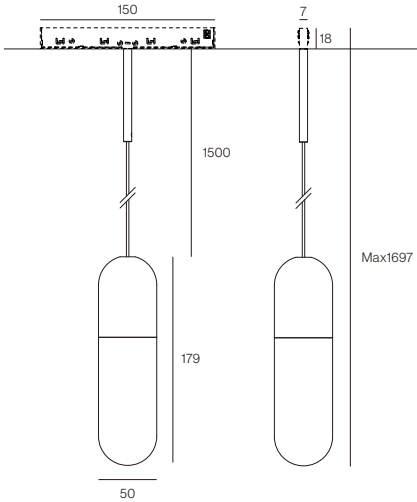

Material Colour

Material Colour	Code
Matte White	Q01
Matte Black	Q03
Brushed Bronze	Y14
Brushed Copper	Y12
Brushed Steel	Y15
Brushed Anthracite	Y13

Notice
For other dimming modes and colors, please consult us.



M7 Micro 48V Track System

Marmar

Color			
Finishes			
			
	Q01 Matte White	Q03 Matte Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite		


Notice
For other dimming modes and colors,
please consult us.





M7
TRACK


Luna

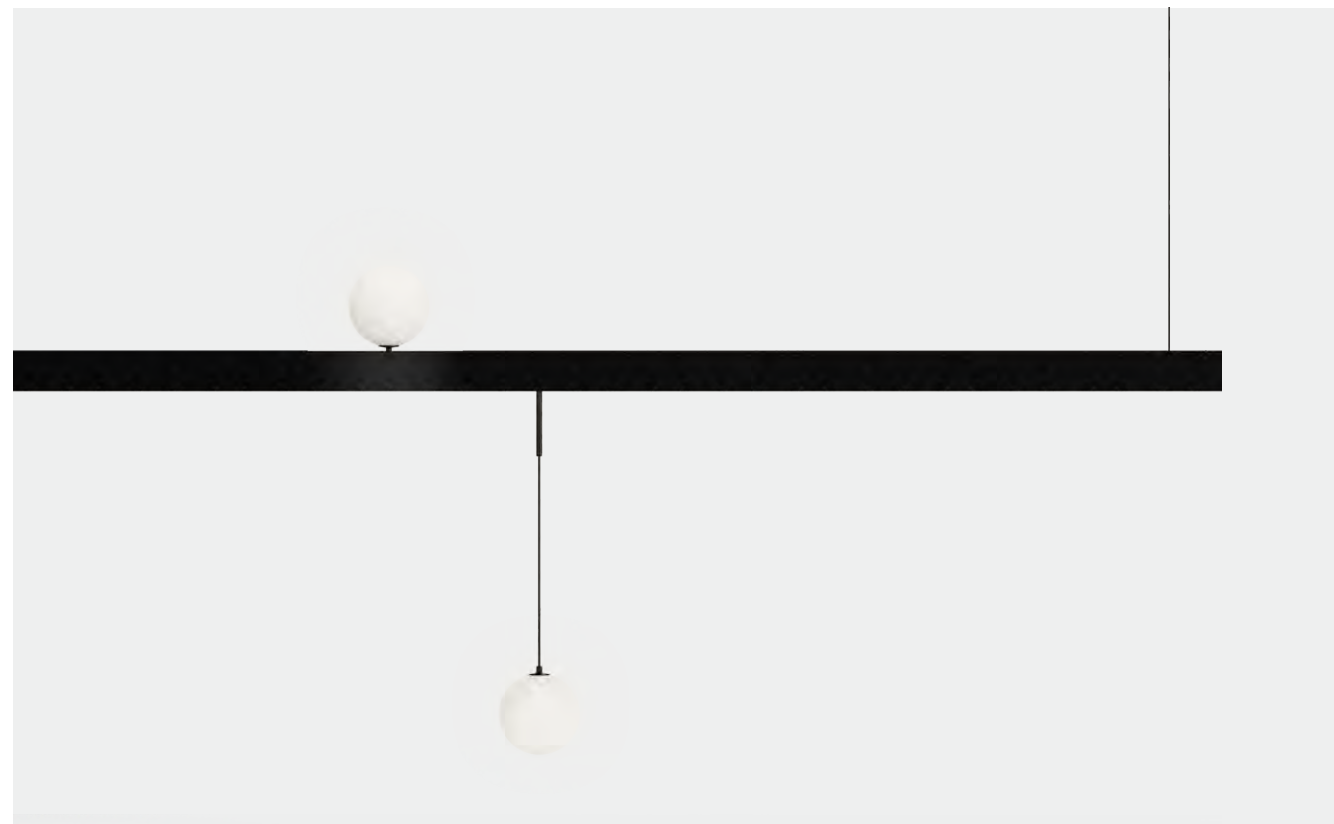





Moon Design

The spherical pendant track light features a full light diffuser and a wide light angle, producing soft and uniform illumination while eliminating glare. Equipped with digital brightness control (DIM DALI).

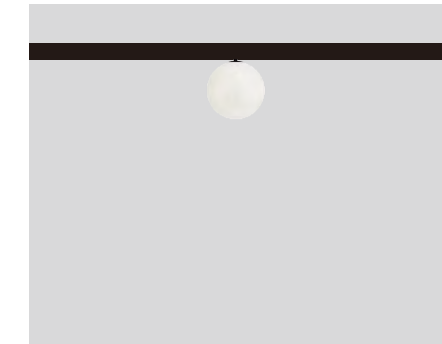Luna




Data								
Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
LN0005	17.037A01000	5W	PWM	Spherical light	2700K	>90	119	<3
			DALI 2		3000K	>90	124	<3
			CASAMBI		3500K	>90	124	<3
					4000K	>90	136	<3
							lm source	
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>SMD</div><div></div></div>								

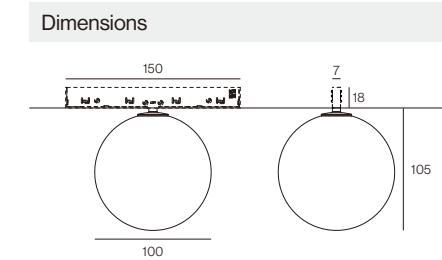

Material Colour	Code
Matte Black	● Q03

Luna

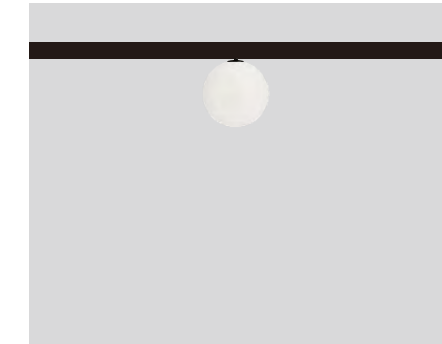


Data

Model No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
LN0107	7W	PWM	Spherical light	2700K	>90	119	<3
		DALI 2		3000K	>90	124	<3
		CASAMBI		3500K	>90	124	<3
				4000K	>90	136	<3
		lm source					


CE

CB

TUV





IP20



DC 48V

SMD



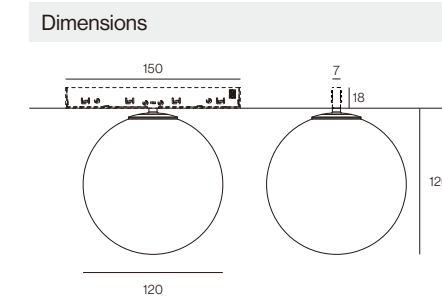


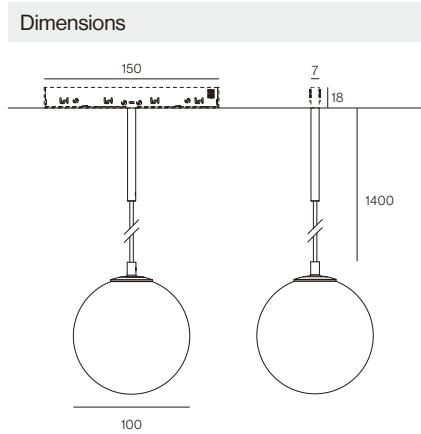


Material Colour	Code
Matte Black	● Q03

Luna






Data								
Model No.	Code No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
LN1005	17.037B01000	5W	PWM	Spherical light	2700K	>90	119	<3
			DALI 2		3000K	>90	124	<3
			CASAMBI		3500K	>90	124	<3
					4000K	>90	136	<3
							lm source	
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>SMD</div><div></div></div>								




Material Colour	Code
Matte Black	● Q03

Luna



Data							
Model No.	Power	LED Control	Beam Angle	CCT	CRI	lm/W	SDCM
LN1107	7W	PWM	Spherical light	2700K	>90	119	<3
		DALI 2		3000K	>90	124	<3
		CASAMBI		3500K	>90	124	<3
				4000K	>90	136	<3
		lm source					
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>SMD</div><div></div></div>							

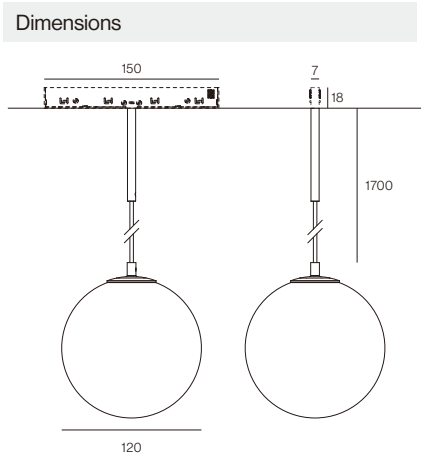

Material Colour	Code
Matte Black	● Q03



M7 Micro 48V Track System

Luna

Color	
Finishes	
Finishes	

Notice
For other dimming modes and colors,
please consult us.





M7
TRACK




Mino

Mino




Dimensions

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM	
MN0006	17.033A04000	6W	PWM	Medium	25°	2700K	>90	136	<3	
MN0106	17.033A06000		DALI 2	Flood	34°	3000K	>90	148	<3	
MN0206	17.033A08000		CASAMBI	Flood	39°	3500K	>90	159	<3	
				Wide flood	50°	4000K	>90	160	<3	
lm source										
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div></div>										

Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13
Gold	●	Y09
Rose Gold	●	D05
Chrome	●	D02

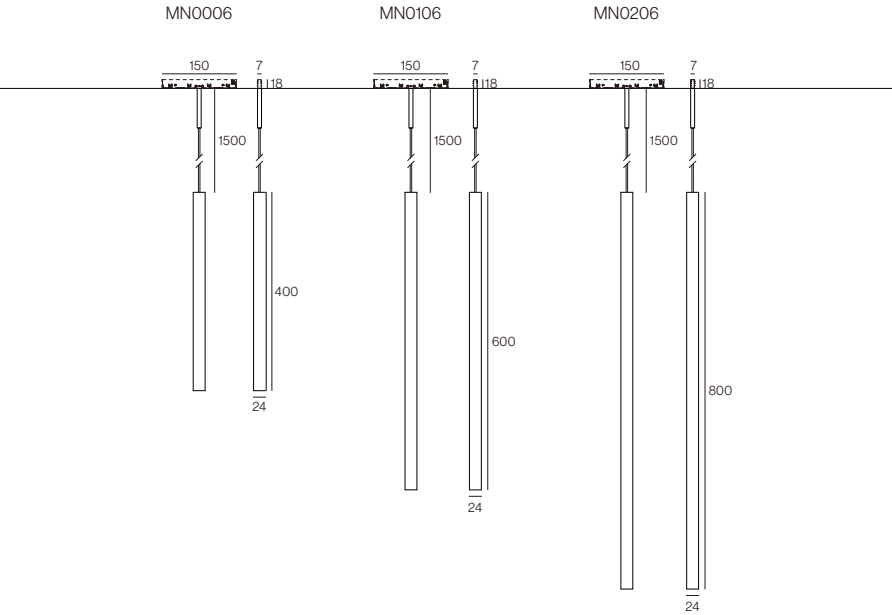

Notice
For other dimming modes and colors, please consult us.

Track type | M7A / M7T / M7E / M7H Material | AL

Mino




Dimensions

Data

Model No.	Code No.	Power	LED Control	Beam Angle		CCT	CRI	lm/W	SDCM	
MN0410	17.034A04000	10W	PWM	Medium	24°	2700K	>90	140	<3	
MN0510	17.034A06000		DALI 2	Medium	30°	3000K	>90	151	<3	
MN0610	17.034A08000		CASAMBI	Flood	39°	3500K	>90	161	<3	
				Wide flood	52°	4000K	>90	162	<3	
lm source										
<div><div>CE</div><div>CB</div><div>TUV</div><div></div><div>IP20</div><div></div><div>DC 48V</div><div>COB</div><div></div></div>										

Material Colour	Code	
White	○	F04
Black	●	F05
Brushed Bronze	●	Y14
Brushed Copper	●	Y12
Brushed Steel	●	Y15
Brushed Anthracite	●	Y13
Gold	●	Y09
Rose Gold	●	D05
Chrome	●	D02

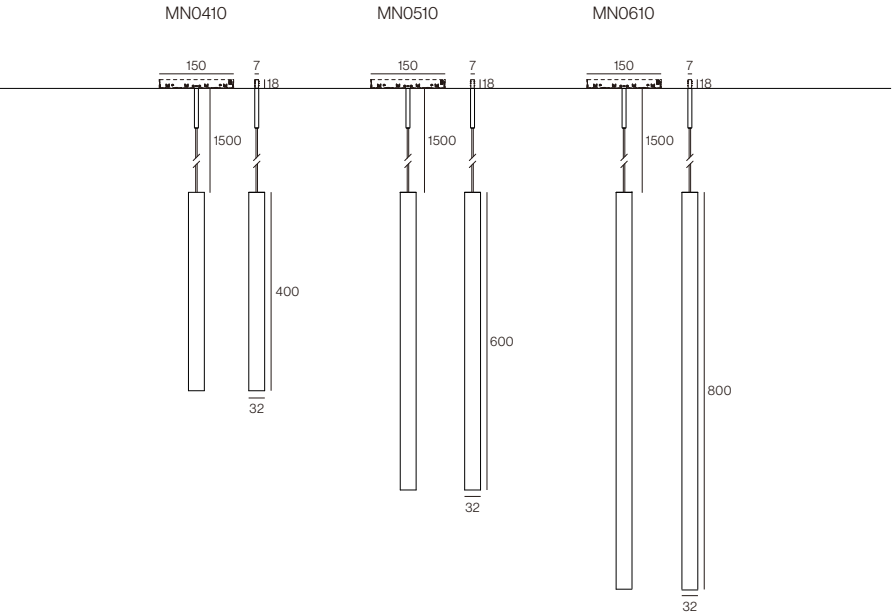










Notice
For other dimming modes and colors, please consult us.

Track type | M7A / M7T / M7E / M7H Material | AL



Mino


Color			
Finishes			
	F04 White	F05 Black	
Special Finishes			
	Y14 Brushed Bronze	Y12 Brushed Copper	Y15 Brushed Steel
			
	Y13 Brushed Anthracite	Y09 Gold	D05 Rose Gold
			
	D02 Chrome		

Notice
For other dimming modes and colors,
please consult us.




M7
TRACK

Soar

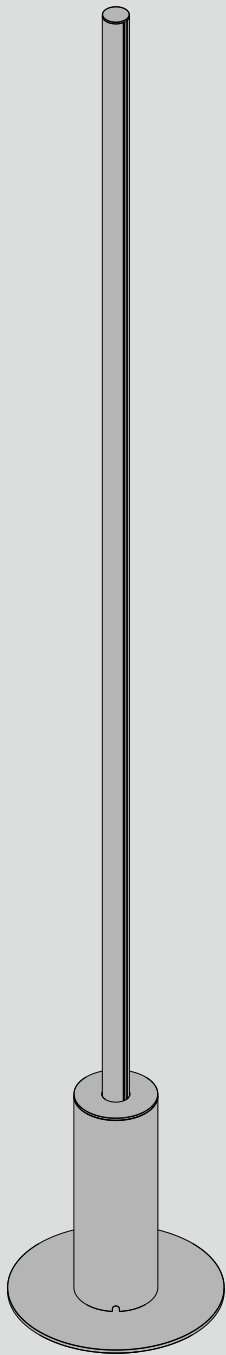

+

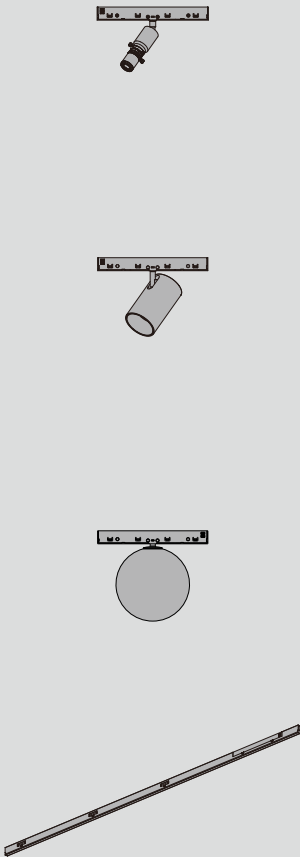


Flexible lamp body configuration.

This type of floor lamp consists of multiple independent modules, such as the lamp head, pole, and base, which can be freely disassembled and assembled. You can choose different shapes, colors, and materials for the modules based on your space requirements and personal preferences. For example, the lamp head can be selected in round, square, or other unique shapes.

Soar



Dimensions

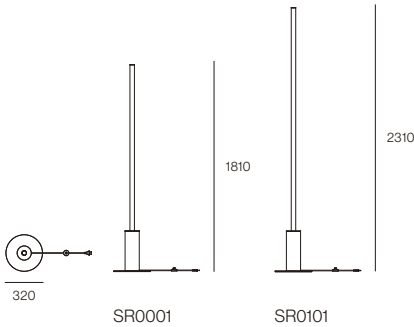

Data

Model No.	Installation	Ingress Protection	Class	Power Supply Included	DIM Type
SR0001	Floor standing	IP20	II	YES	PWM
SR0101					



Material Colour

Matte White	○	F01
Matte Black	●	F02

Notice

For other dimming modes and colors, please consult us.






Soar



Data					
Model No.	Installation	Ingress Protection	Class	Power Supply Included	DIM Type
SR1001	Floor standing	IP20	II	YES	PWM
SR1101					



Dimensions

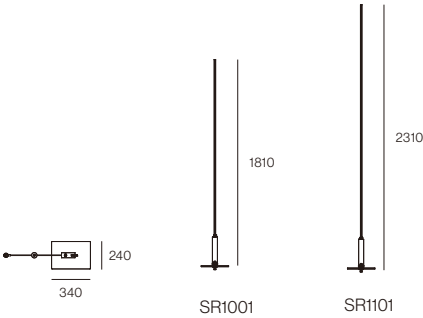

Material Colour	Code
Matte White	○ F01
Matte Black	● F02

Notice
For other dimming modes and colors,
please consult us.






Soar



Data					
Model No.	Installation	Ingress Protection	Class	Power Supply Included	DIM Type
SR2001	Floor standing	IP20	II	YES	PWM
SR2101					



Dimensions

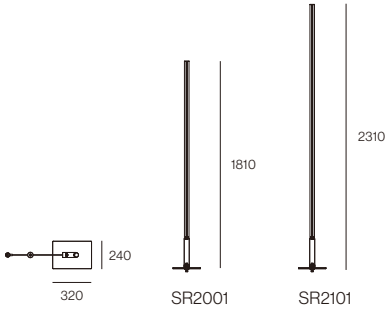

Material Colour	Code
Matte White	○ F01
Matte Black	● F02

Notice
For other dimming modes and colors,
please consult us.





GUANGDONG KC LIGHTING CO.,LTD

No. 13 Lianbao Road, Shengfeng Community,
Xiaolan Town, Zhongshan City, Guangdong, China

Tel: +86 760 22389158 / +86 760 22382108

E-mail: info@kclighting.hk

Fax: +86 760 22382109

Web: www.kclighting.hk

