


48V low voltage track system luminaires

M19/ M15/ M26/ M56

KClighting



A POWERFUL FAMILY OF TRACKS..

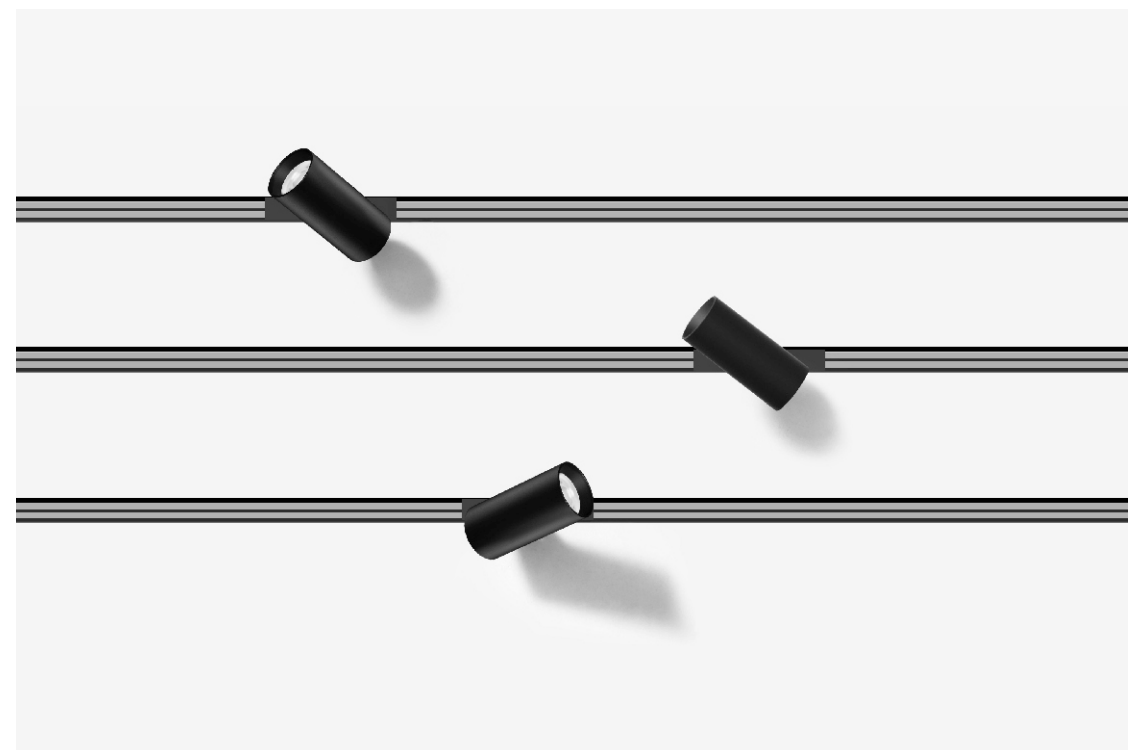

48V LOW VOLTAGE TRACK SYSTEM LUMINAIRES

M19 XS 48V Track



M15 Slim 48V Track



M26 Mini 48V Track




M56 Armada Motorized 48V Track




M19

XS 48V Track


M19A/M19O/M19T/M19E

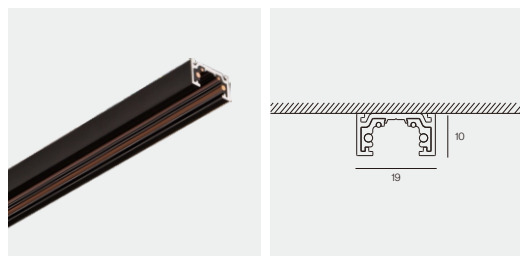


XS Track M19A
Surface
015

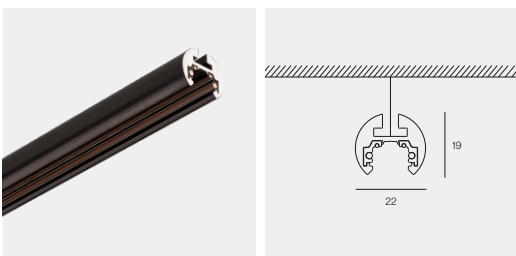

XS Track M19O
Suspended
016

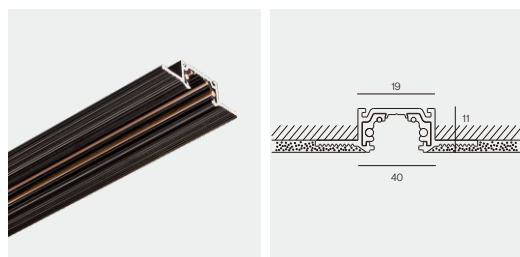

XS Track M19T
Trimless Recessed
017

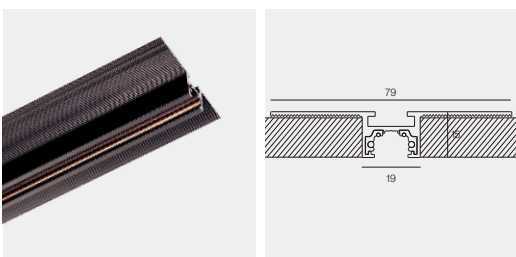

XS Track M19E
Trimless Recessed
018




IT22 024 IT28 024 IT35 024 IT30 026 LO35 028 LO30 030 TO50 032 Mars 034



Grille Fold 036 Grille Fold 036 Grille Fold 038 Fold 038 Grille S 040 Grille S 040 Grille R 042 Grille R 042



Linear Bar 044 Roller 046 Roller 046 Cubilux 048 Cubilux 048 Basilisk 050 Basilisk 052 Cone 054

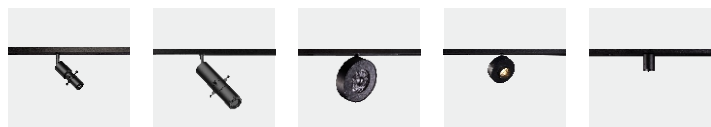


Pablo S 056 Pablo S 056 TO80 058 TO60 058 Botte 060


M15

Slim 48V Track


M15A/M15E/M15F

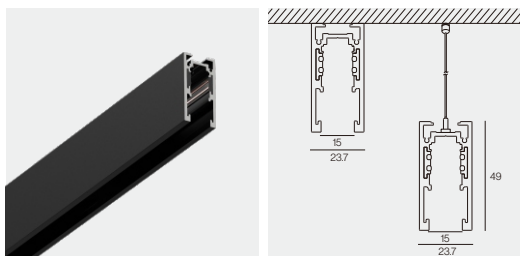

Slim Track M15A
Surface/Suspended
067

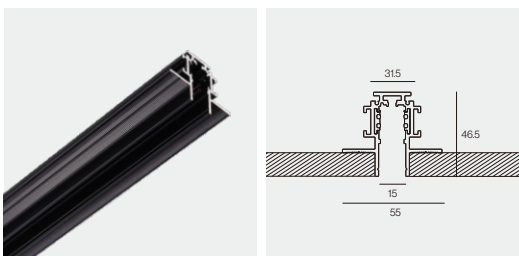

Slim Track M15E
Trimless Recessed
068

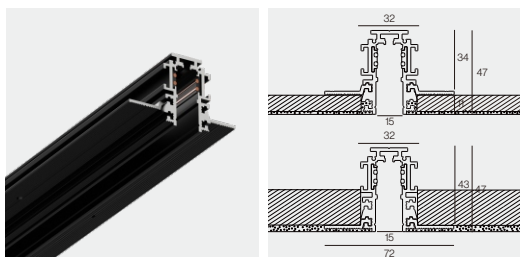

Slim Track M15F
Trimless
069



IT22 072 IT28 072 IT35 072 IT30 074 TO50 076 Mars 078 IT40 080 Grille Fold 082




Grille Fold 084 Fold 084 Grille S 086 String 088 Mino 090 Lead Ball 092


M26

Mini 48V Track


M26A/M26T/M26R/M26E/M26S

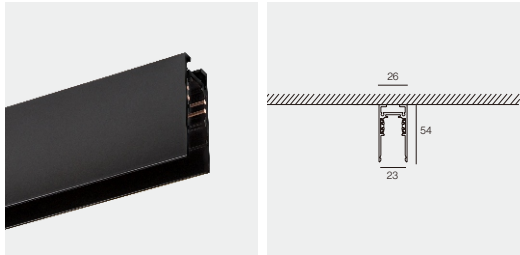


Mini Track M26A
Suspended/Surface
093

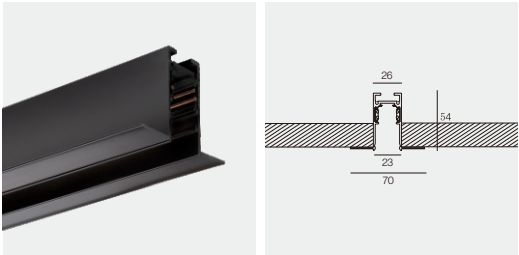


Mini Track M26T
Trimless
095

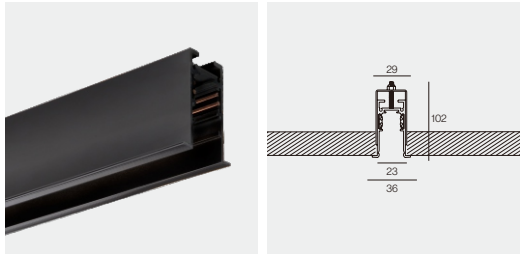

Mini Track M26R
Trim
097

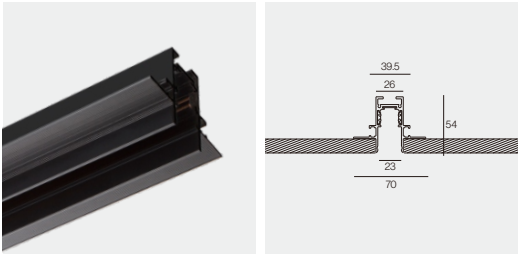

Mini Track M26E
Trimless
099

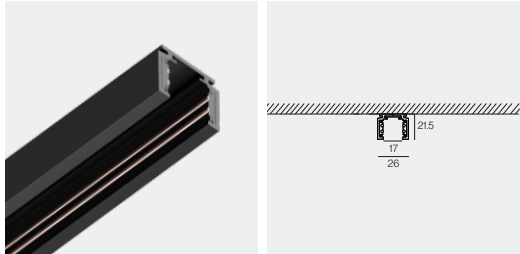

Mini Track M26S
Surface
101



Pablo S 104 Pablo S 104 IT25 107 IT35 107 IT35-2 107 IT45 108 IT45-2 108 IT45 110




IT45-2 110 IT55 111 IT55 111 IT70 111 IT70 112 TO 114 TO 114 TO 114




Launcher 116 Launcher 116 Fold 119 Fold 119 Fold 119 Fold 120 Grille Light 122 Grille Light 122



String 125 Roller 128 Cubilux 130 Cone S 132 Cone S 132 Barral 134 Cup 136 Soul 138

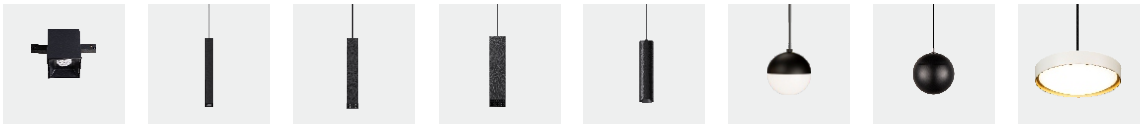

Soul 138 Cubilux P 140 Cubilux P 140 Cubilux P 140 Pic 142 Ball 144 Lead Ball 146 Moon 148

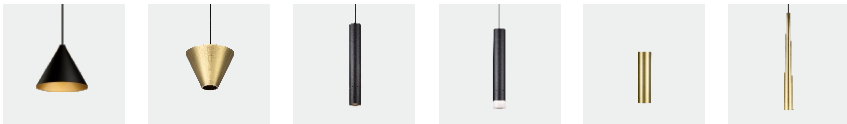


Cone 150 Gyro 152 Mino 154 Mino 154 Mino 156 Meteor 158


M56

Armada Motorized 48V Track

M56A/M56E

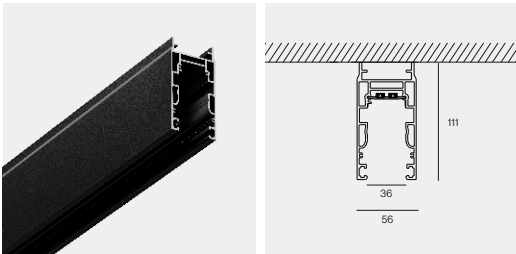


Motorized M56A
Surface Mounted
159

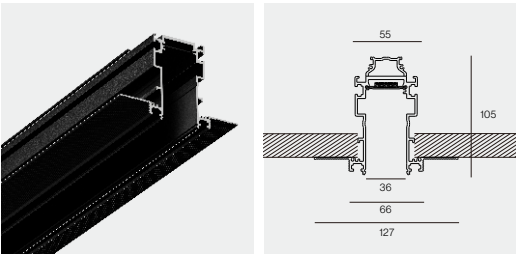

Motorized M56E
Trimless Mounting
159



Armada 160

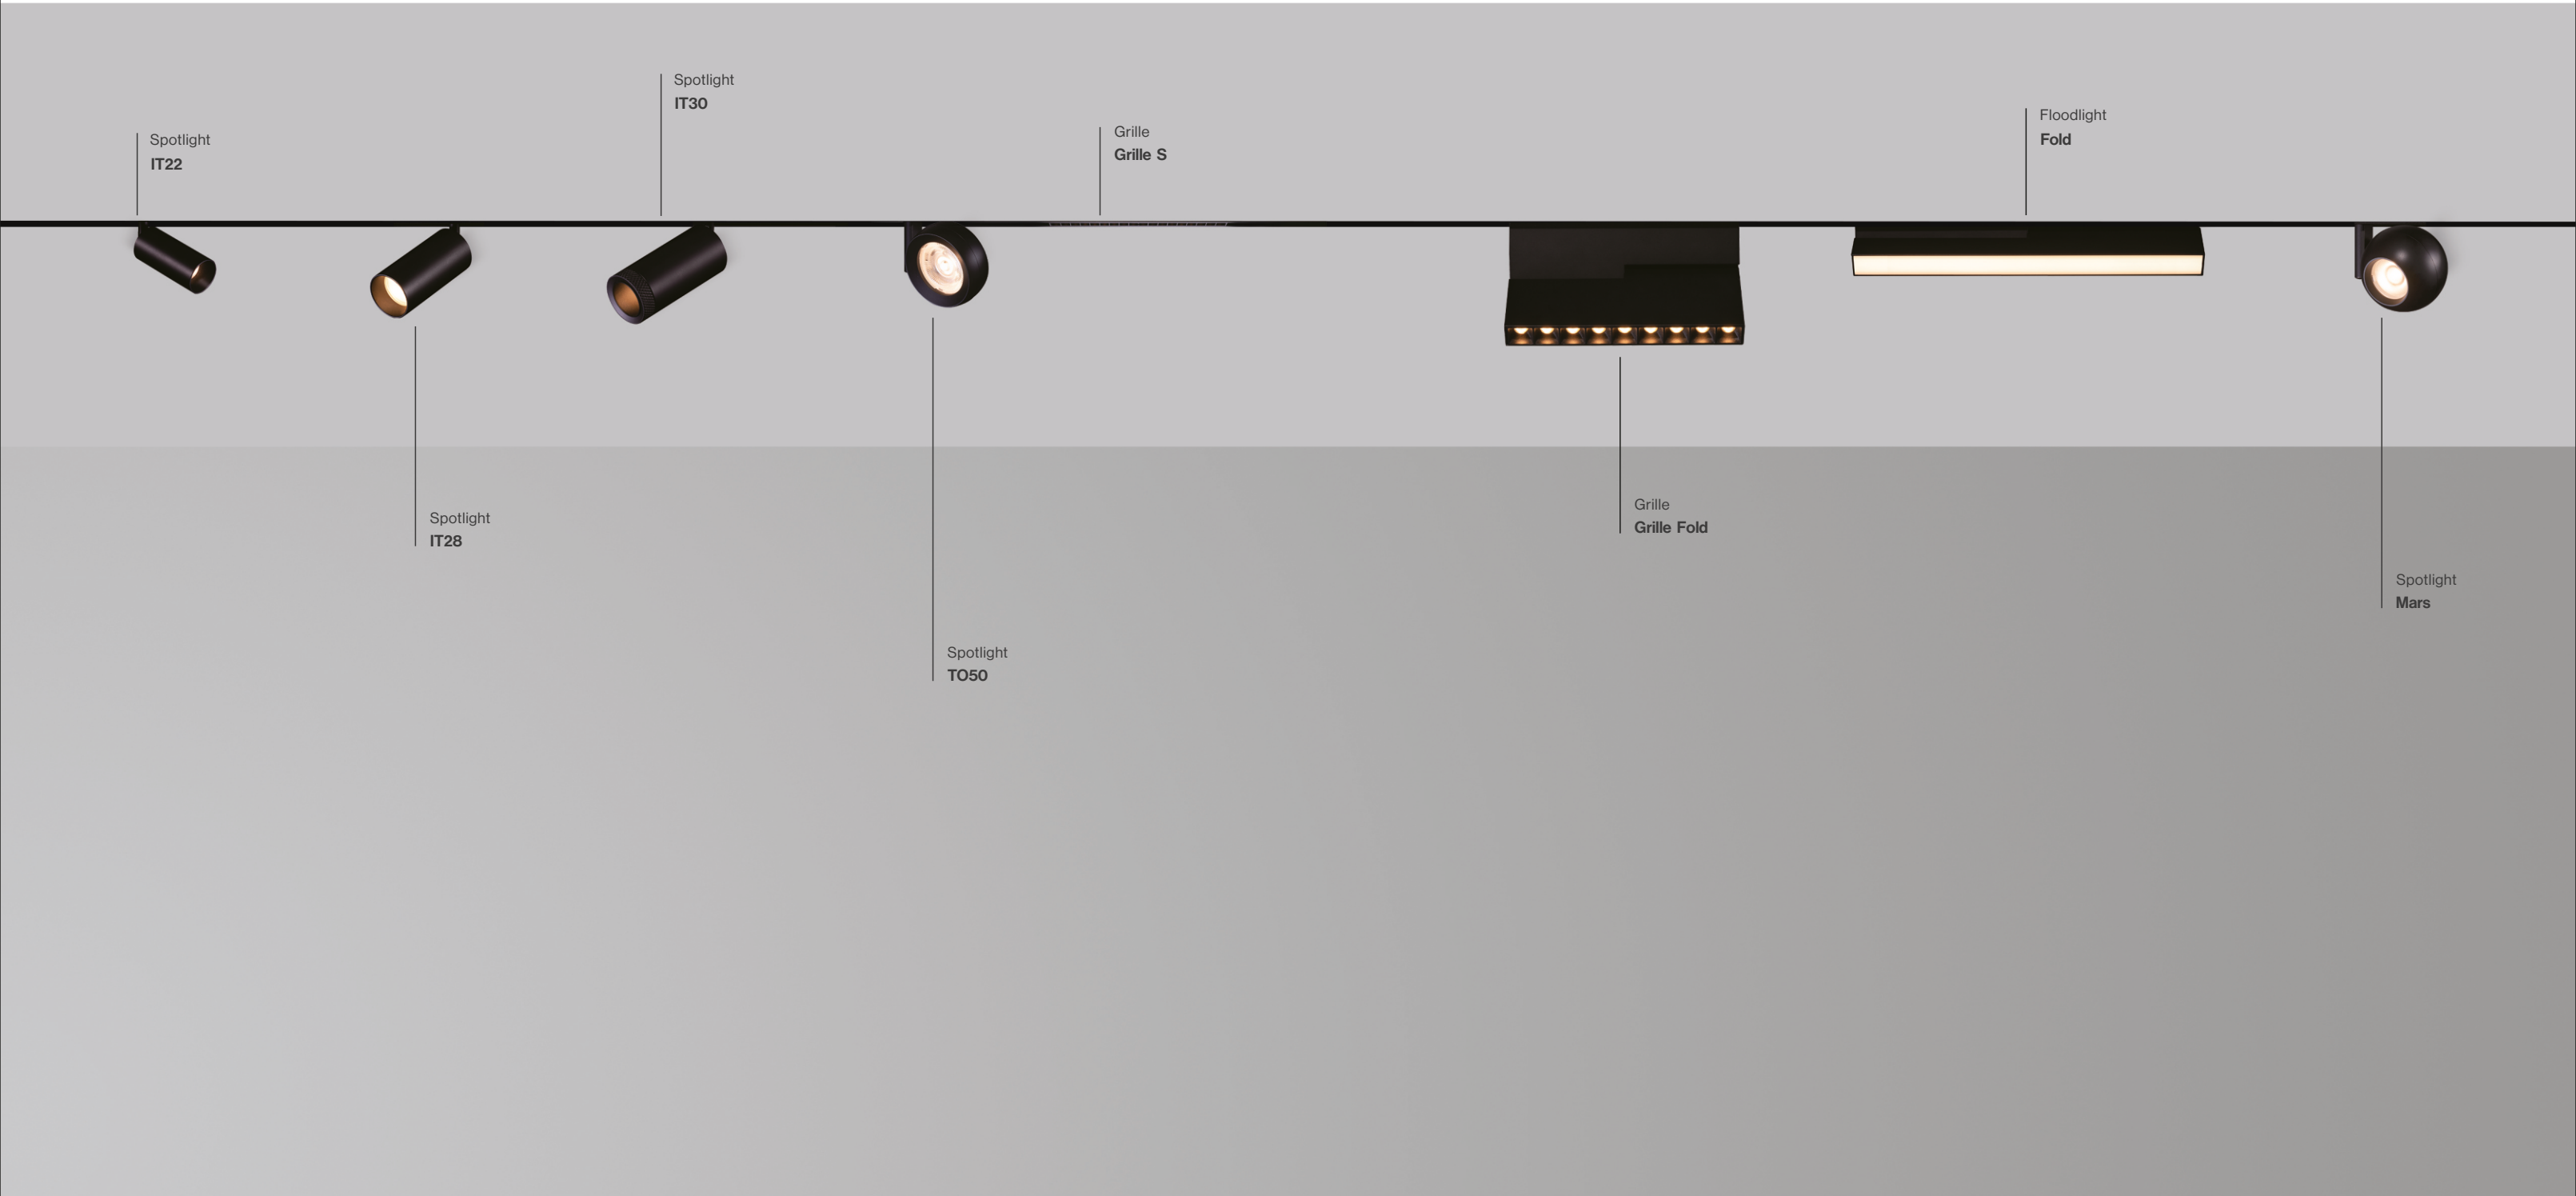


M15

Slim 48V Track

M15A/M15E/M15F

- Very small track
- Easy to mount on the ceiling
- Minimal visual impact
- Dali and Casambi for wireless control allow every luminaire to be controlled individually

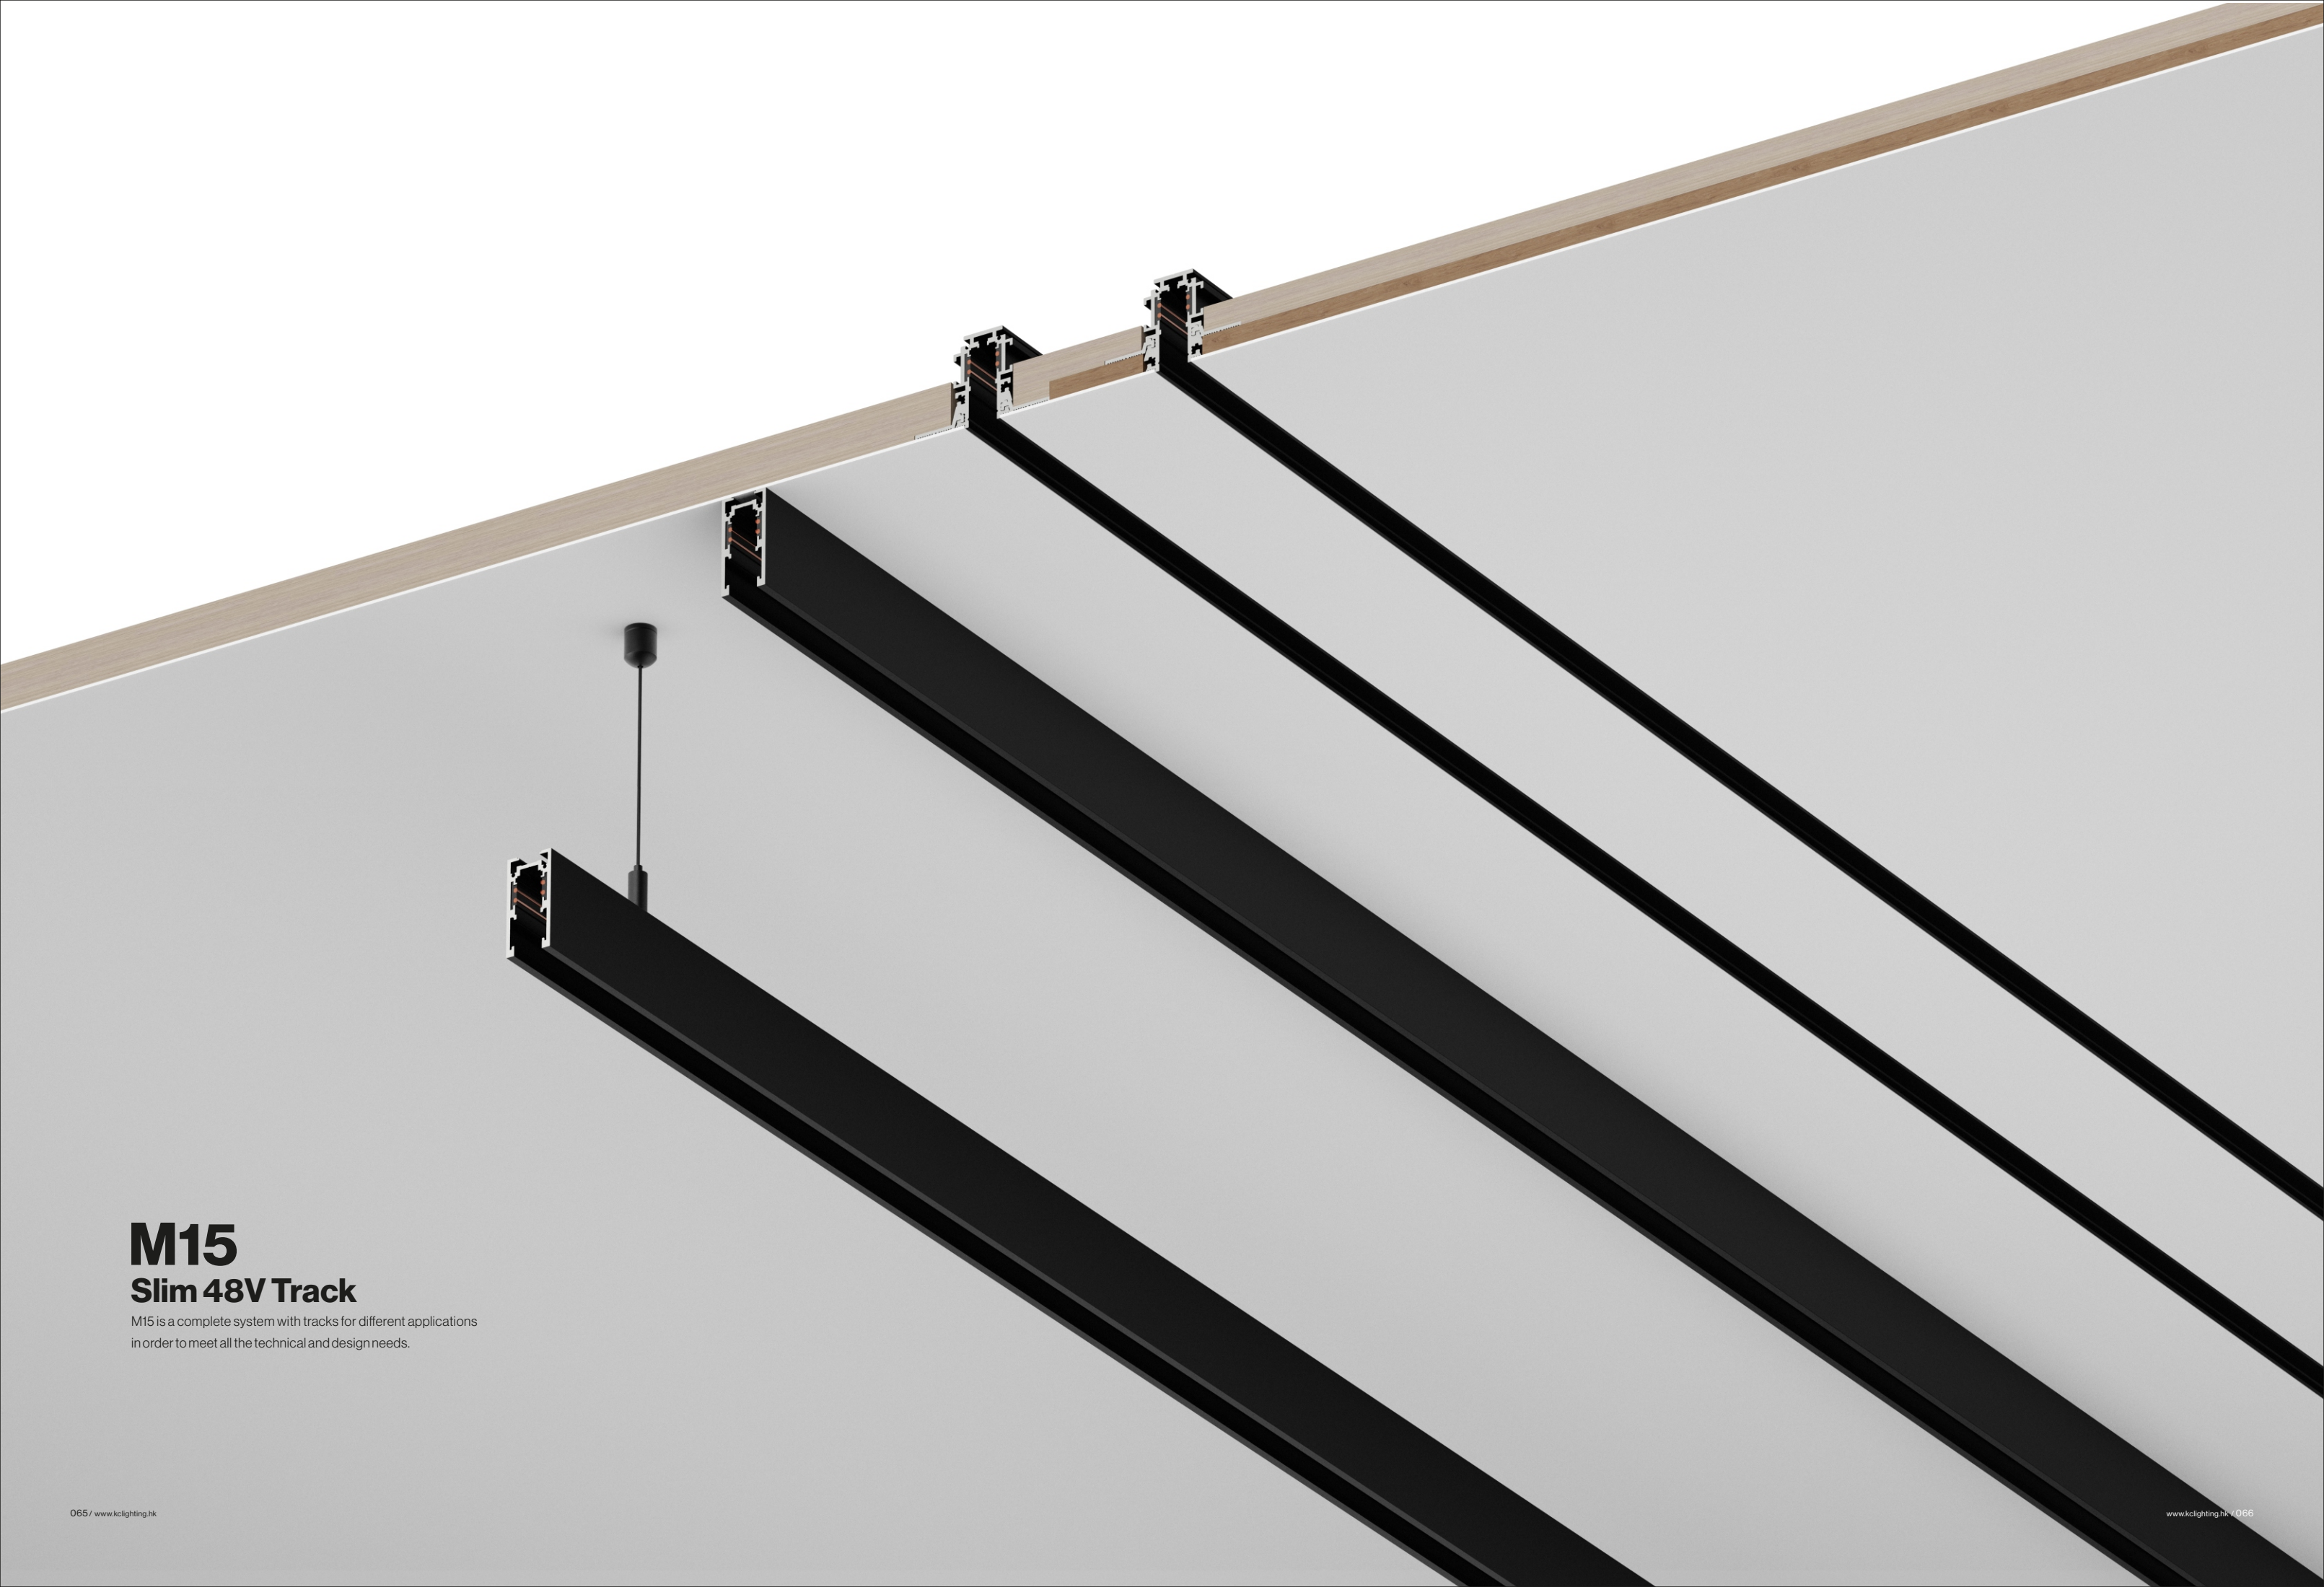

M15

Slim 48V Track

M15 is a complete system with tracks for different applications in order to meet all the technical and design needs.




CASAMBI



inset single control via
Casambi app

M15A
Slim 48V Track Suspended / Surface

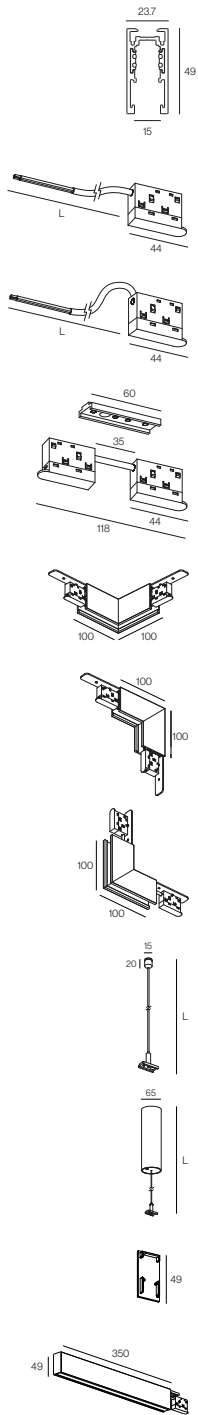

Model No.	Size(mm)	Product Name	Code No.
M15A10	1000	Track	15.M15A10000
M15A20	2000	Track	15.M15A20000
M15A30	3000	Track	15.M15A30000
M15L01	44x12x29.5 Cable L:500	Power Feeder Unit	15.M15L01000
M15L02	44x12x29.5 Cable L:2000	Power Feeder Unit	15.M15L02000
M15L03	44x12x29.5 Cable L:500	Power Feeder Unit	15.M15L09000
M15L04	44x12x29.5 Cable L:2000	Power Feeder Unit	15.M15L10000
M15L05	118x12x29.5/60x7x19	Linear Connector	15.M15L04A00
M15AH0	100x100	Channel Corner *H90°	15.M15AH9000
M15AV0	100x100	Channel Corner *V90°	15.M15AV9000
M15AE0	100x100	Channel Corner *E90°	15.M15AE9000
M15L07	Cable L:2000	Pendant Kit	15.M15L06A00
M15L08	Cable L:2000	Pendant Kit	15.M15L07A00
M15L06	49x23.7x6	End Caps	15.M15L05A00
M15L09	350x23.7x49	Driver Box	15.M15L08A00

Material colour | BK ■ WH □ |

Material | AL □ PC




CASAMBI



inset single control via
Casambi app


M15E
Slim 48V Track Trimless Recessed

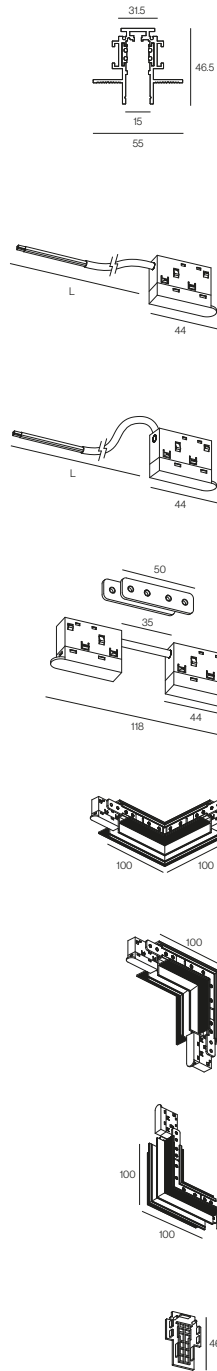

Model No.	Size(mm)	Product Name	Code No.
M15E10	1000	Track	15.M15E10000
M15E20	2000	Track	15.M15E20000
M15E30	3000	Track	15.M15E30000
M15L01	44x12x29.5 Cable L:500	Power Feeder Unit	15.M15L01000
M15L02	44x12x29.5 Cable L:2000	Power Feeder Unit	15.M15L02000
M15L03	44x12x29.5 Cable L:500	Power Feeder Unit	15.M15L09000
M15L04	44x12x29.5 Cable L:2000	Power Feeder Unit	15.M15L10000
M15L10	118x12x29.5/50x2x13.4	Linear Connector	15.M15L04E00
M15EH0	100x100	Channel Corner *H90°	15.M15EH9000
M15EV0	100x100	Channel Corner *V90°	15.M15EV9000
M15EE0	100x100	Channel Corner *E90°	15.M15EE9000
M15L11	46.5x31.5x6	End Caps	15.M15L05E00

Material colour | BK ■ WH □ |

Material | AL □ PC

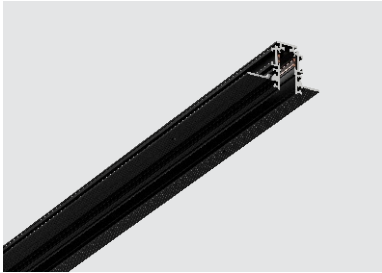


CASAMBI



inset single control via Casambi app

M15F
Slim 48V Track Trimless Recessed

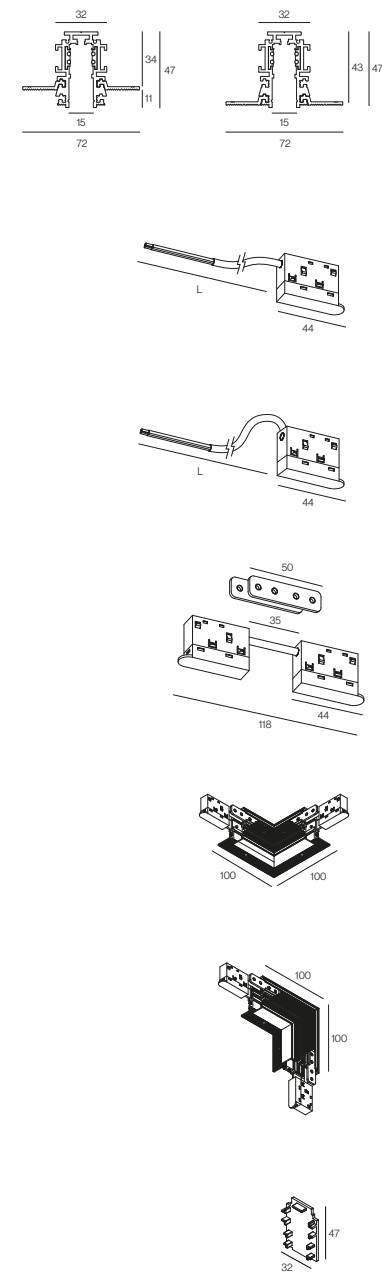

Model No.	Size(mm)	Product Name	Code No.
M15F10	1000	Track	15.M15F10000
M15F20	2000	Track	15.M15F20000
M15F30	3000	Track	15.M15F30000
M15L01	44x12x29.5 Cable L:500	Power Feeder Unit	15.M15L01000
M15L02	44x12x29.5 Cable L:2000	Power Feeder Unit	15.M15L02000
M15L03	44x12x29.5 Cable L:500	Power Feeder Unit	15.M15L09000
M15L04	44x12x29.5 Cable L:2000	Power Feeder Unit	15.M15L10000
M15L05	118x12x29.5/50x2x134	Linear Connector	15.M15L04E00
M15FH0	100x100	Channel Corner*H90°	15.M15FH9000
M15FV0	100x100	Channel Corner*V90°	15.M15FV9000
M15L12	47x32x7	End Caps	15.M15L05F00

Material colour | BK ■ WH □

Material | AL | PC

M15F Slim Track

can adjust trimless frames according to ceiling or wall thickness.





Slim
TRACK

IT22

It stands out with its compact size and high performance, making it ideal for accent lighting. For accent lighting, flexible choice for its colors and beam angles, structural design balances aesthetics and functionality.

M15

Slim 48V Track

M15A/M15E/M15F



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee

Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

KClighting

IT22	15.001A01000	IT4003
	Power	3W
	Beam angle	18°/23°/35°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	60lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

355°

Hot Plug Safe

Flicker Free

Adjustable

IT28	15.002A01000	IT4105
	Power	5.3W
	Beam angle	25°/31°/42°/56°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

355°

Hot Plug Safe

Flicker Free

Adjustable

IT35	15.012A01000	IT4208
	Power	8W
	Beam angle	22°/29°/37°/50°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

Tunable White

III

Class III


90°

355°

Hot Plug Safe

Flicker Free

Adjustable

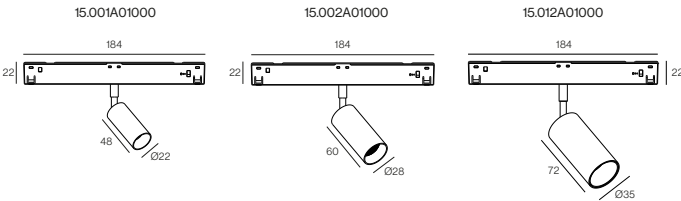

Colour | BK ■ WH □ | Material | AL |

Slim
TRACK

IT30

Knurled ring on the projector, zoomable beam angles from 18° to 31°, excellent lighting solution for accent lighting, used for spaces in stores, galleries, residential, etc.

M15

Slim 48V Track

M15A/M15E/M15F



KClighting

IT30	15.003A01000	IT4305
	Power	5.3W
	Beam angle	18-31°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	36lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □

Material | AL

Slim
TRACK

T050

Its compact size and strong performance make it stand out in accent lighting scenarios accent lighting, flexible choice for its colors and beam angles, structural design balances aesthetics and functionality.

M15 Slim 48V Track

M15A/M15E/M15F



KClighting

T050	15.006A01000	T08006
	Power	5.6W
	Beam angle	19°/26°/38°/58°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

355°

355°

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |



Slim
TRACK

Mars

M15
Slim 48V Track
M15A/M15E/M15F



KClighting

Mars	15.013A01000	MR2006
	Power	5.6W
	Beam angle	21°/26°/38°/52°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Tunable White

Class III

180°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app




Colour | BK ■ WH □ | Material | AL |



Slim
TRACK

IT40

M15
Slim 48V Track
M15A/M15E/M15F

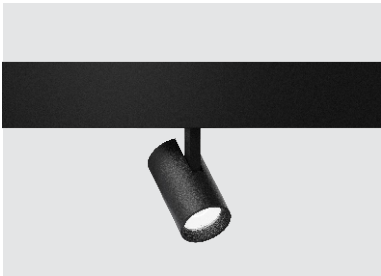

IT40	15.045A01000	IT4412
	Power	12W
	Beam angle	18°/25°/36°/52°
	Color temperature	2700K/3000K/3500K/4000K/2700k-6000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Tunable White

DALI2

90°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |



Slim
TRACK

Grille Fold

Adjustable and folded mini grille light, which can be flexibly used in the spaces for accent lighting, pursuing visual comfort while keeping high lighting performance.

M15 Slim 48V Track

M15A/M15E/M15F



KClighting

Grille Fold	15.007A09000	GF2008
	Power	8.5W
	Beam angle	30°/36°/41°/60°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	73lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

90°

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |



Slim
TRACK

Grille Fold

Product appearance is small and exquisite, it adopts flexible clip installation method, simple installation, easy to disassembly.

M15

Slim 48V Track

M15A/M15E/M15F



KClighting

Grille Fold	15.011A12000	GF2111
	Power	11W
	Beam angle	32°/36°/45°/65°
	Color temperature	2700K/3000K/3500K/4000K/2700k-6000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

Tunable White

Tunable White

DALI2

DALI2

90°

90°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Fold	15.011B12000	FL2011
	Power	11W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K/2700k-6000K
	Light efficiency	45lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

Tunable White

Tunable White

DALI2

DALI2

90°

90°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options		
1	Non-dim	
2	0/1-10V	
3	DALI	
4	Bluetooth	
5	ZigBee	



Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

Slim
TRACK

Grille S

Mini grille lights can be widely used in many different spaces, with excellent anti glare effects, such as shops, offices, etc.

M15 Slim 48V Track

M15A/M15E/M15F



KClighting

Grille S	15.008A12000	GR3011
	Power	11W
	Beam angle	32°/36°/45°/65°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB



Grille S	15.008A18000	GR3109
	Power	8.5W
	Beam angle	30°/36°/41°/60°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

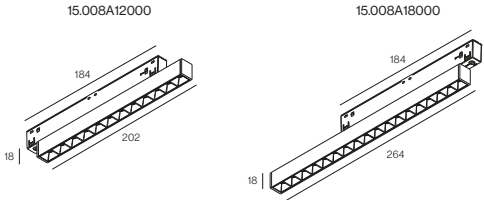



Colour | BK ■ WH □ | Material | AL |



Slim
TRACK

String

M15
Slim 48V Track
M15A/M15E/M15F

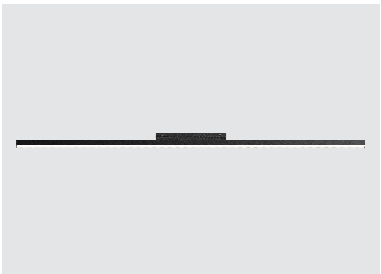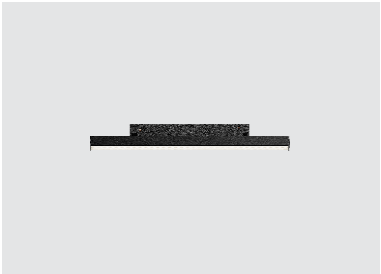

Options

1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee

Features

CASAMBI



inset single control via
Casambi app

KClighting

String	15.022A03000	SG2008
	Power	8W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

Ingress Protection

Voltage

Class III

Tunable White

DALI2

Hot Plug Safe

Flicker Free

Fixed

String	15.022A06000	SG2116
	Power	16W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	82lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

Ingress Protection

Voltage

Class III

Tunable White

DALI2

Hot Plug Safe

Flicker Free

Fixed

String	15.022A09000	SG2224
	Power	24W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	83lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

Ingress Protection

Voltage

Class III


Tunable White

DALI2

Hot Plug Safe

Flicker Free

Fixed

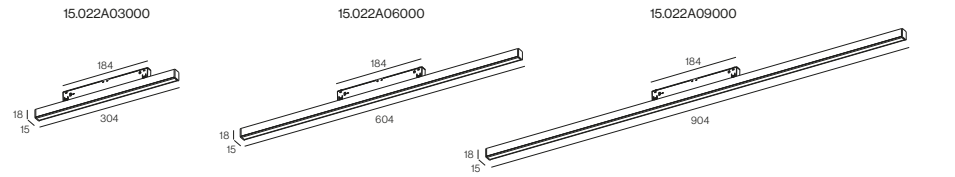

Colour | BK ☒ WH ☐

Material | PC |

Mino

Slim
TRACK



M15
Slim 48V Track
M15A/M15E/M15F



KClighting

Mino	15.037A60000	NO0008/NO0010
	Power	8W/10W
	Beam angle	27°/37°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	50lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI 2

DALI 2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app




Colour | BK ■ WH □ | Material | AL |



Slim
TRACK

Lead Ball

M15
Slim 48V Track
M15A/M15E/M15F

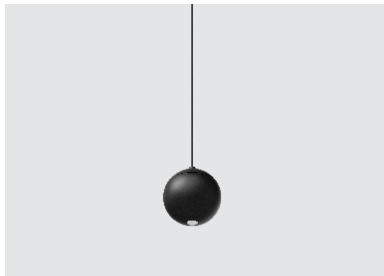

Lead Ball	15.042A01000	LE1008/LE1010
	Power	8W/10W
	Beam angle	27°/37°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	50lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI 2

DALI 2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI


Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

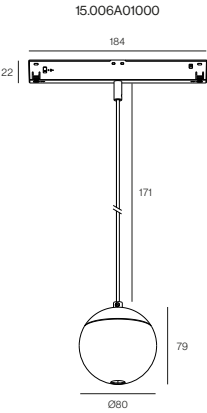

Colour | BK ■ WH □ | Material | AL |

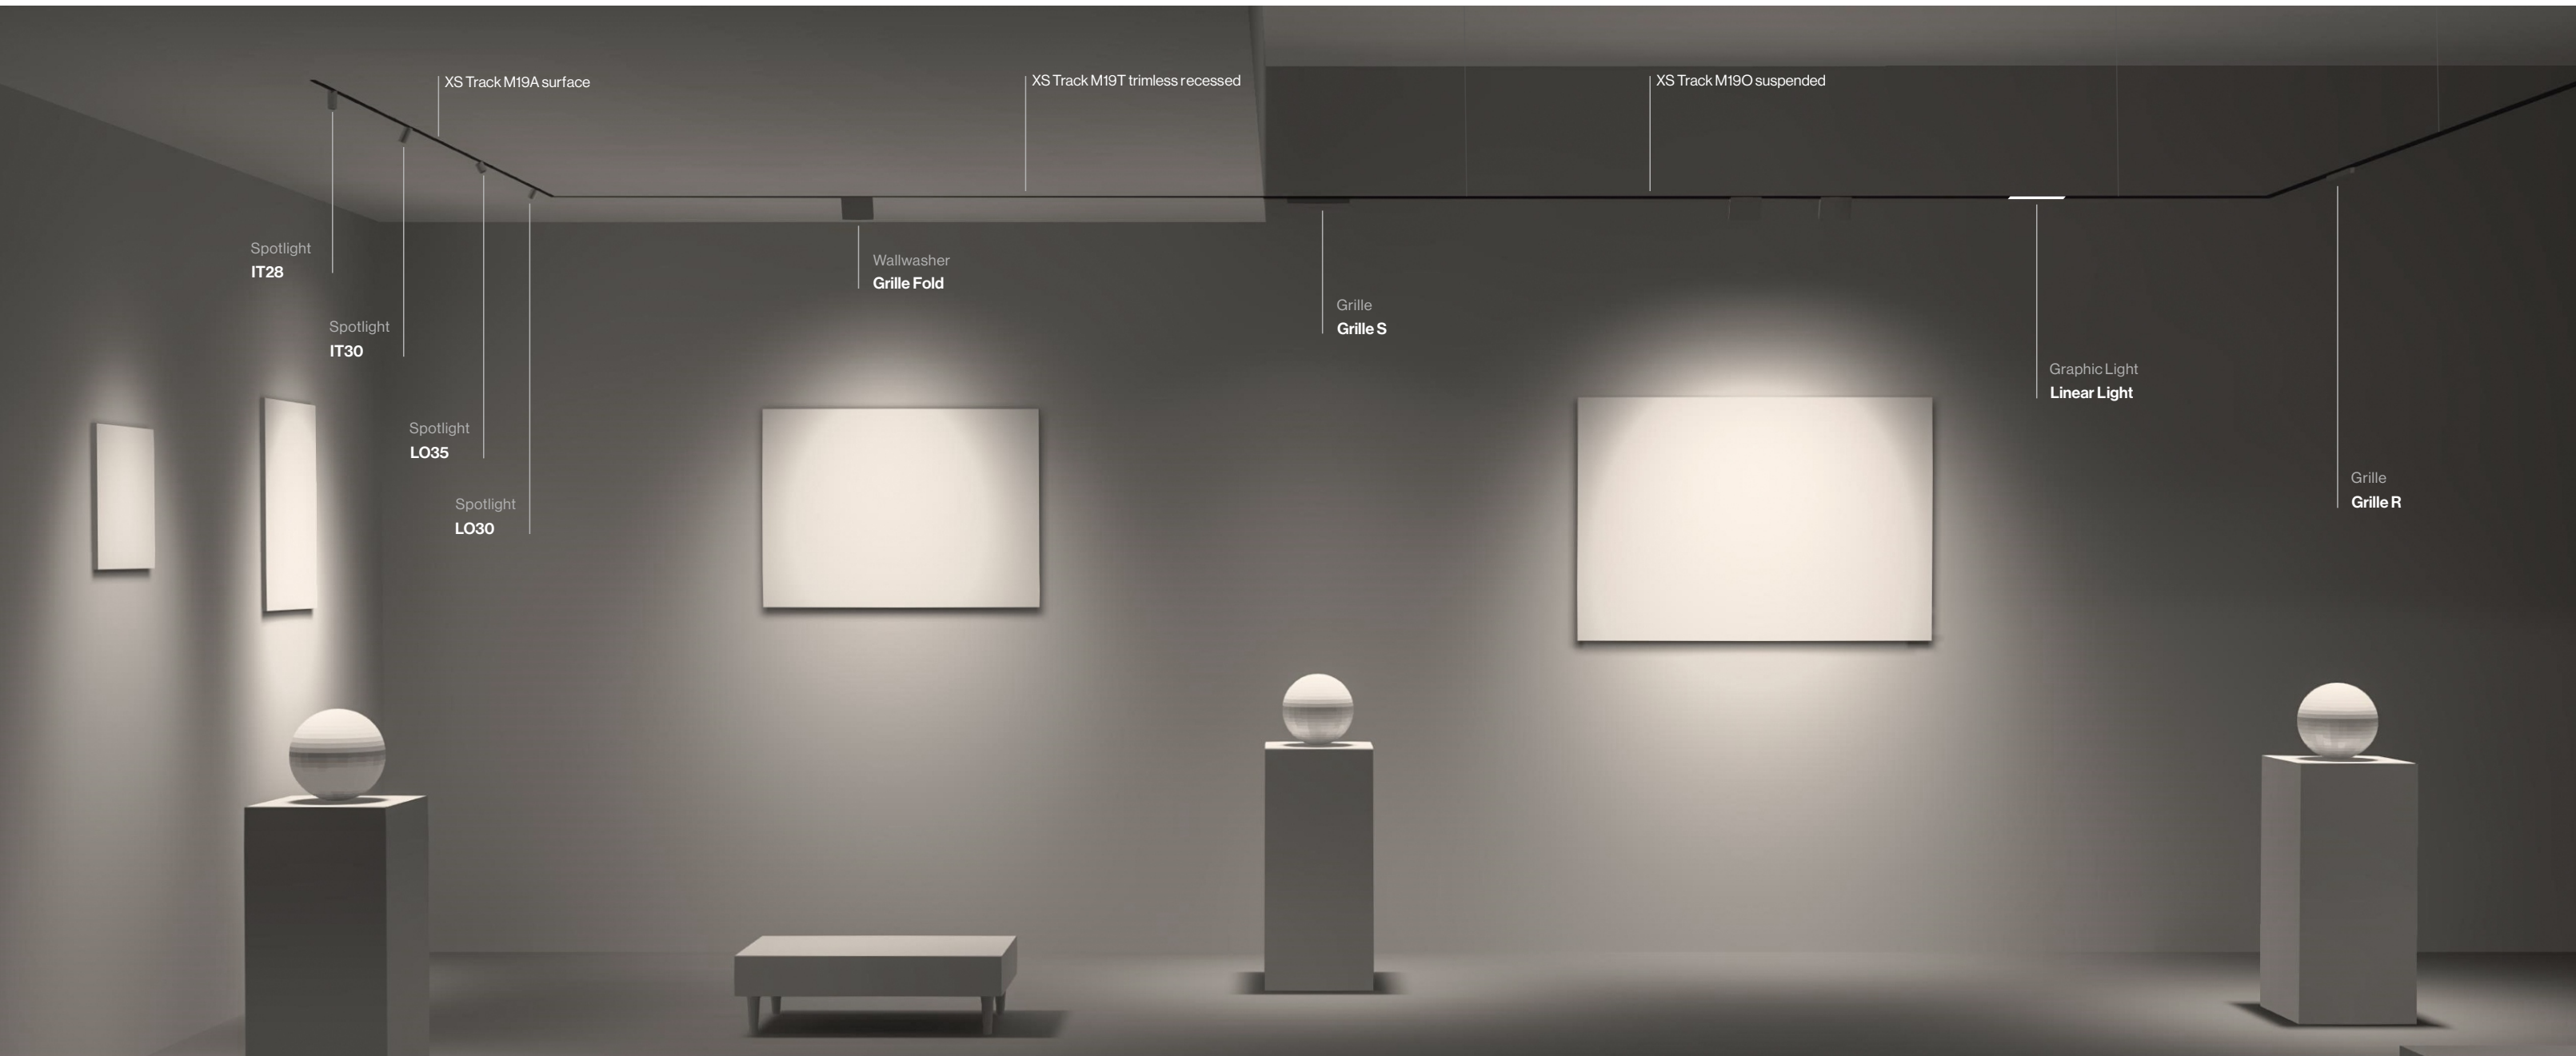

XS TRACK M19A/M19O/M19T/M19E

XS Track is as easy to install as a surface system, but it looks like a trimless track due to its compact size and geometric simplicity.

XS Track M19A/M19O/M19T/M19E system

TYPE

XS TRACK M19A



XS TRACK M19O



XS TRACK M19T




XS TRACK M19E




MOUNTING

Surface



Suspended



Trimless Recessed



Trimless Recessed



INSETS


IT22



IT28



IT35




IT30



LO35



LO30




TO50



Mars



Grille Fold



Grille Fold



Grille Fold




Fold



Grille S



Grille S



Grille R




Grille R



Linear Bar




Roller




Roller




Cubilux



Cubilux




Basilisk



Basilisk




Cone



Pablo S



Pablo S



TO80



TO60



Botte






XS Track M19A surface



48v

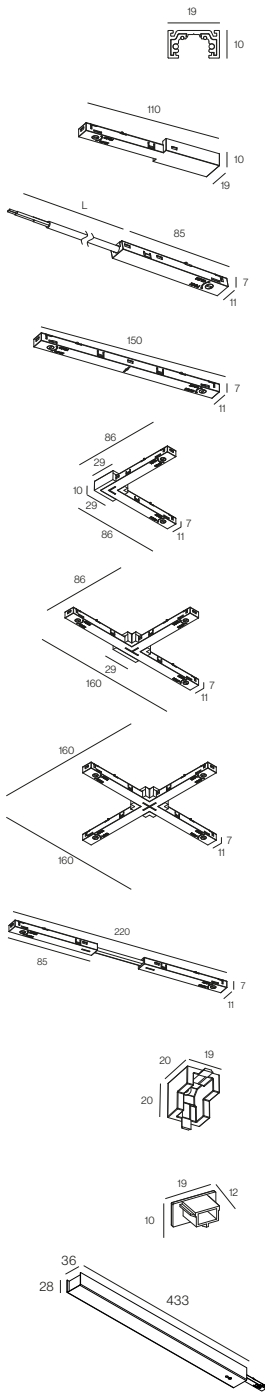

Model No.	Size(mm)	Product Name	Code No.
M19A10	1000	Track	10.M19A10000
M19A20	2000	Track	10.M19A20000
M19A30	3000	Track	10.M19A30000
M19L01	110x19x10	Power Feeder Unit	10.M19L01000
M19L02	85x11x7 L:500	Power Feeder Unit	10.M19L11000
M19L03	85x11x7 L:2100	Power Feeder Unit	10.M19L12000
M19L04	150x11x7	Linear(connector)	10.M19L02000
M19L05	86x86x7	L-connector	10.M19L03000
M19L06	29x29x10	L-connector Fixing Part	10.M19L03001
M19L07	160x86x7	T-connector	10.M19L04000
M19L08	29x24x10	T-connector Fixing Part	10.M19L04001
M19L09	160x160x7	X-connector	10.M19L05000
M19L10	29x29x10	X-connector Fixing Part	10.M19L05001
M19L11	220x11x7	Linear Flexible(connector)	10.M19L06000
M19L12	20x20x19	Vertical Corner*v90° Installation Fixing Part	10.M19L06001
M19L13	19x12x10	End Caps	10.M19L07000
M19L18		Driver Box/100W/48V	10.M19L15000
M19L19		Driver Box/200W/48V	10.M19L16000

Material colour | BK ■ WH □ |


Material | AL □ PC



XS Track M19O suspended



48v

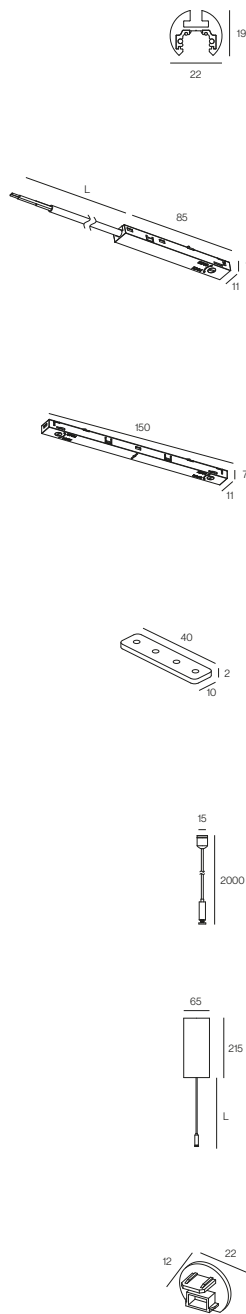

Model No.	Size(mm)	Product Name	Code No.
M19O10	1000	Track	10.M19O10000
M19O20	2000	Track	10.M19O20000
M19O30	3000	Track	10.M19O30000
M19L02	85x11x7 L:500	Power Feeder Unit	10.M19L11000
M19L03	85x11x7 L:2100	Power Feeder Unit	10.M19L12000
M19L04	150x11x7	Linear(connector)	10.M19L02000
M19L17	40x10x2	Linear Connector	10.M19L14000
M19L14	2000x15	Pendant Kit	10.M19L08000
M19L15	215x65 L:1800	Pendant Kit	10.M19L09000
M19L16	22x19x12	End Caps	10.M19L10000

Material colour | BK ■ WH □ |


Material | AL □ PC



XS Track M19T trimless recessed



48v

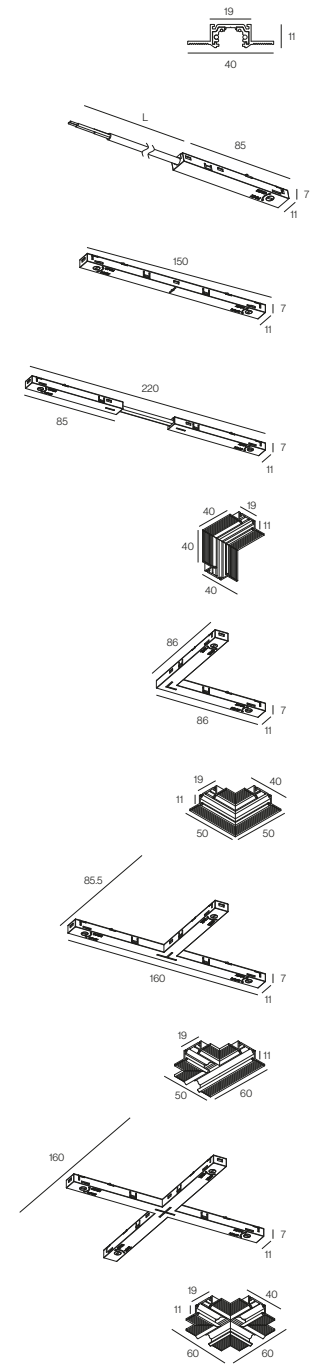

Model No.	Size(mm)	Product Name	Code No.
M19T10	1000	Track	10.M19T10000
M19T20	2000	Track	10.M19T20000
M19T30	3000	Track	10.M19T30000
M19L02	85x11x7 L:500	Power Feeder Unit	10.M19L11000
M19L03	85x11x7 L:2100	Power Feeder Unit	10.M19L12000
M19L04	150x11x7	Linear(connector)	10.M19L02000
M19L11	220x11x7	Linear Flexible(connector)	10.M19L06000
M19TV0	40x40x40	V-shaped Corner*V90°	10.M19TV9000
M19L05	86x86x7	L-connector	10.M19L03000
M19TH0	50x50x11	L-shaped Corner*H90°	10.M19TH9000
M19L07	160x85.5x7	T-connector	10.M19L04000
M19TT0	60x50x11	T-shaped Corner*T90°	10.M19TT9000
M19L09	160x160x7	X-connector	10.M19L05000
M19TX0	60x60x11	X-shaped Corner*X90°	10.M19TX9000

Material colour | BK ■ WH □ |


Material | AL □ PC □



XS Track M19E trimless recessed



48v

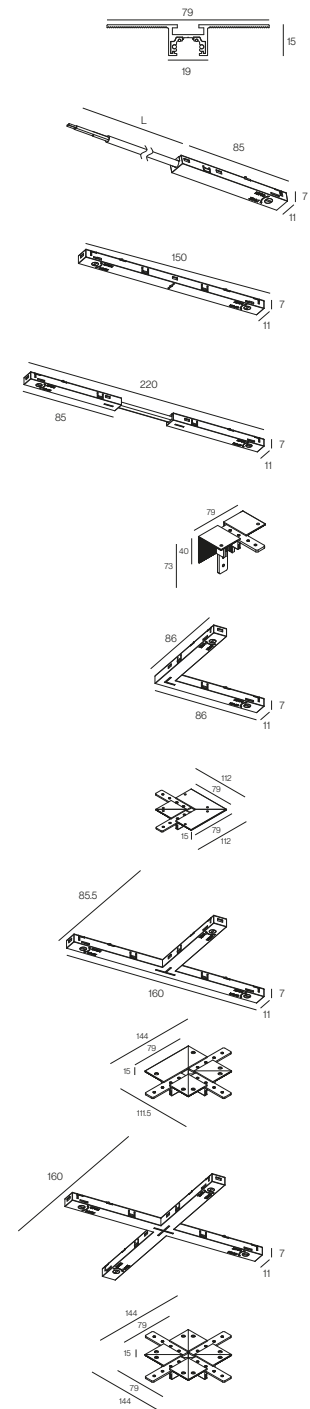

Model No.	Size(mm)	Product Name	Code No.
M19E10	1000	Track	10.M19E10000
M19E20	2000	Track	10.M19E20000
M19E30	3000	Track	10.M19E30000
M19L02	85x11x7 L:500	Power Feeder Unit	10.M19L11000
M19L03	85x11x7 L:2100	Power Feeder Unit	10.M19L12000
M19L04	150x11x7	Linear(connector)	10.M19L02000
M19L11	220x11x7	Linear Flexible(connector)	10.M19L06000
M19EV0	73x73x40	V-shaped Corner*V90°	10.M19EV9000
M19L05	86x86x7	L-connector	10.M19L03000
M19EH0	112x112x15	L-shaped Corner*H90°	10.M19EH9000
M19L07	160x85.5x7	T-connector	10.M19L04000
M19ET0	144x111.5x15	T-shaped Corner*T90°	10.M19ET9000
M19L09	160x160x7	X-connector	10.M19L05000
M19EX0	144x144x15	X-shaped Corner*X90°	10.M19EX9000

Material colour | BK ■ WH □ |

Material | AL □ PC □

- 01 Track
M19A10 / M19A20 / M19A30
10.M19A10000
10.M19A20000
10.M19A30000

- 02 Power feeder unit
M19L01
10.M19L01000

- 03 Linear(connector)
M19L04
10.M19L02000

- 04 L-connector fixing part
M19L06
10.M19L03001

- 05 L-connector
M19L05
10.M19L03000

- 06 T-connector fixing part
M19L08
10.M19L04001

- 07 T-connector
M19L07
10.M19L04000

- 08 X-connector fixing part
M19L10
10.M19L05001









- 09 X-connector
M19L09
10.M19L05000

- 10 Vertical corner *v90°
installation fixing part
M19L12
10.M19L06001

- 11 Linear flexible
M19L11
10.M19L06000



- 12 End caps
M19L13
10.M19L07000

- G Curved track
Ø600mm/90° R300
M19AV0
10.M19AV0690

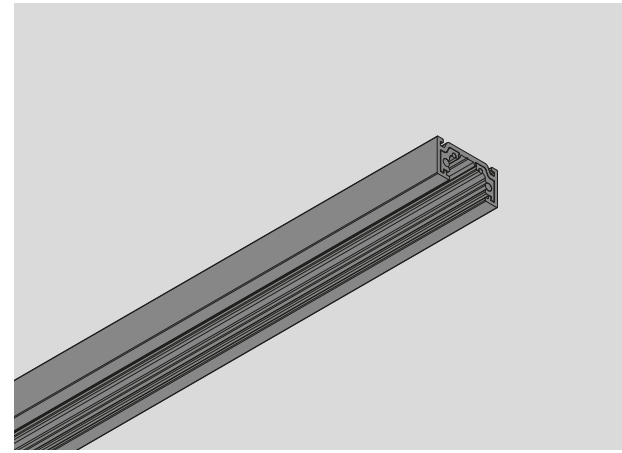


XS Track M19A surface

XS Track is as easy to install as a surface system, but it looks like a trimless track due to its small size and its geometric simplicity.

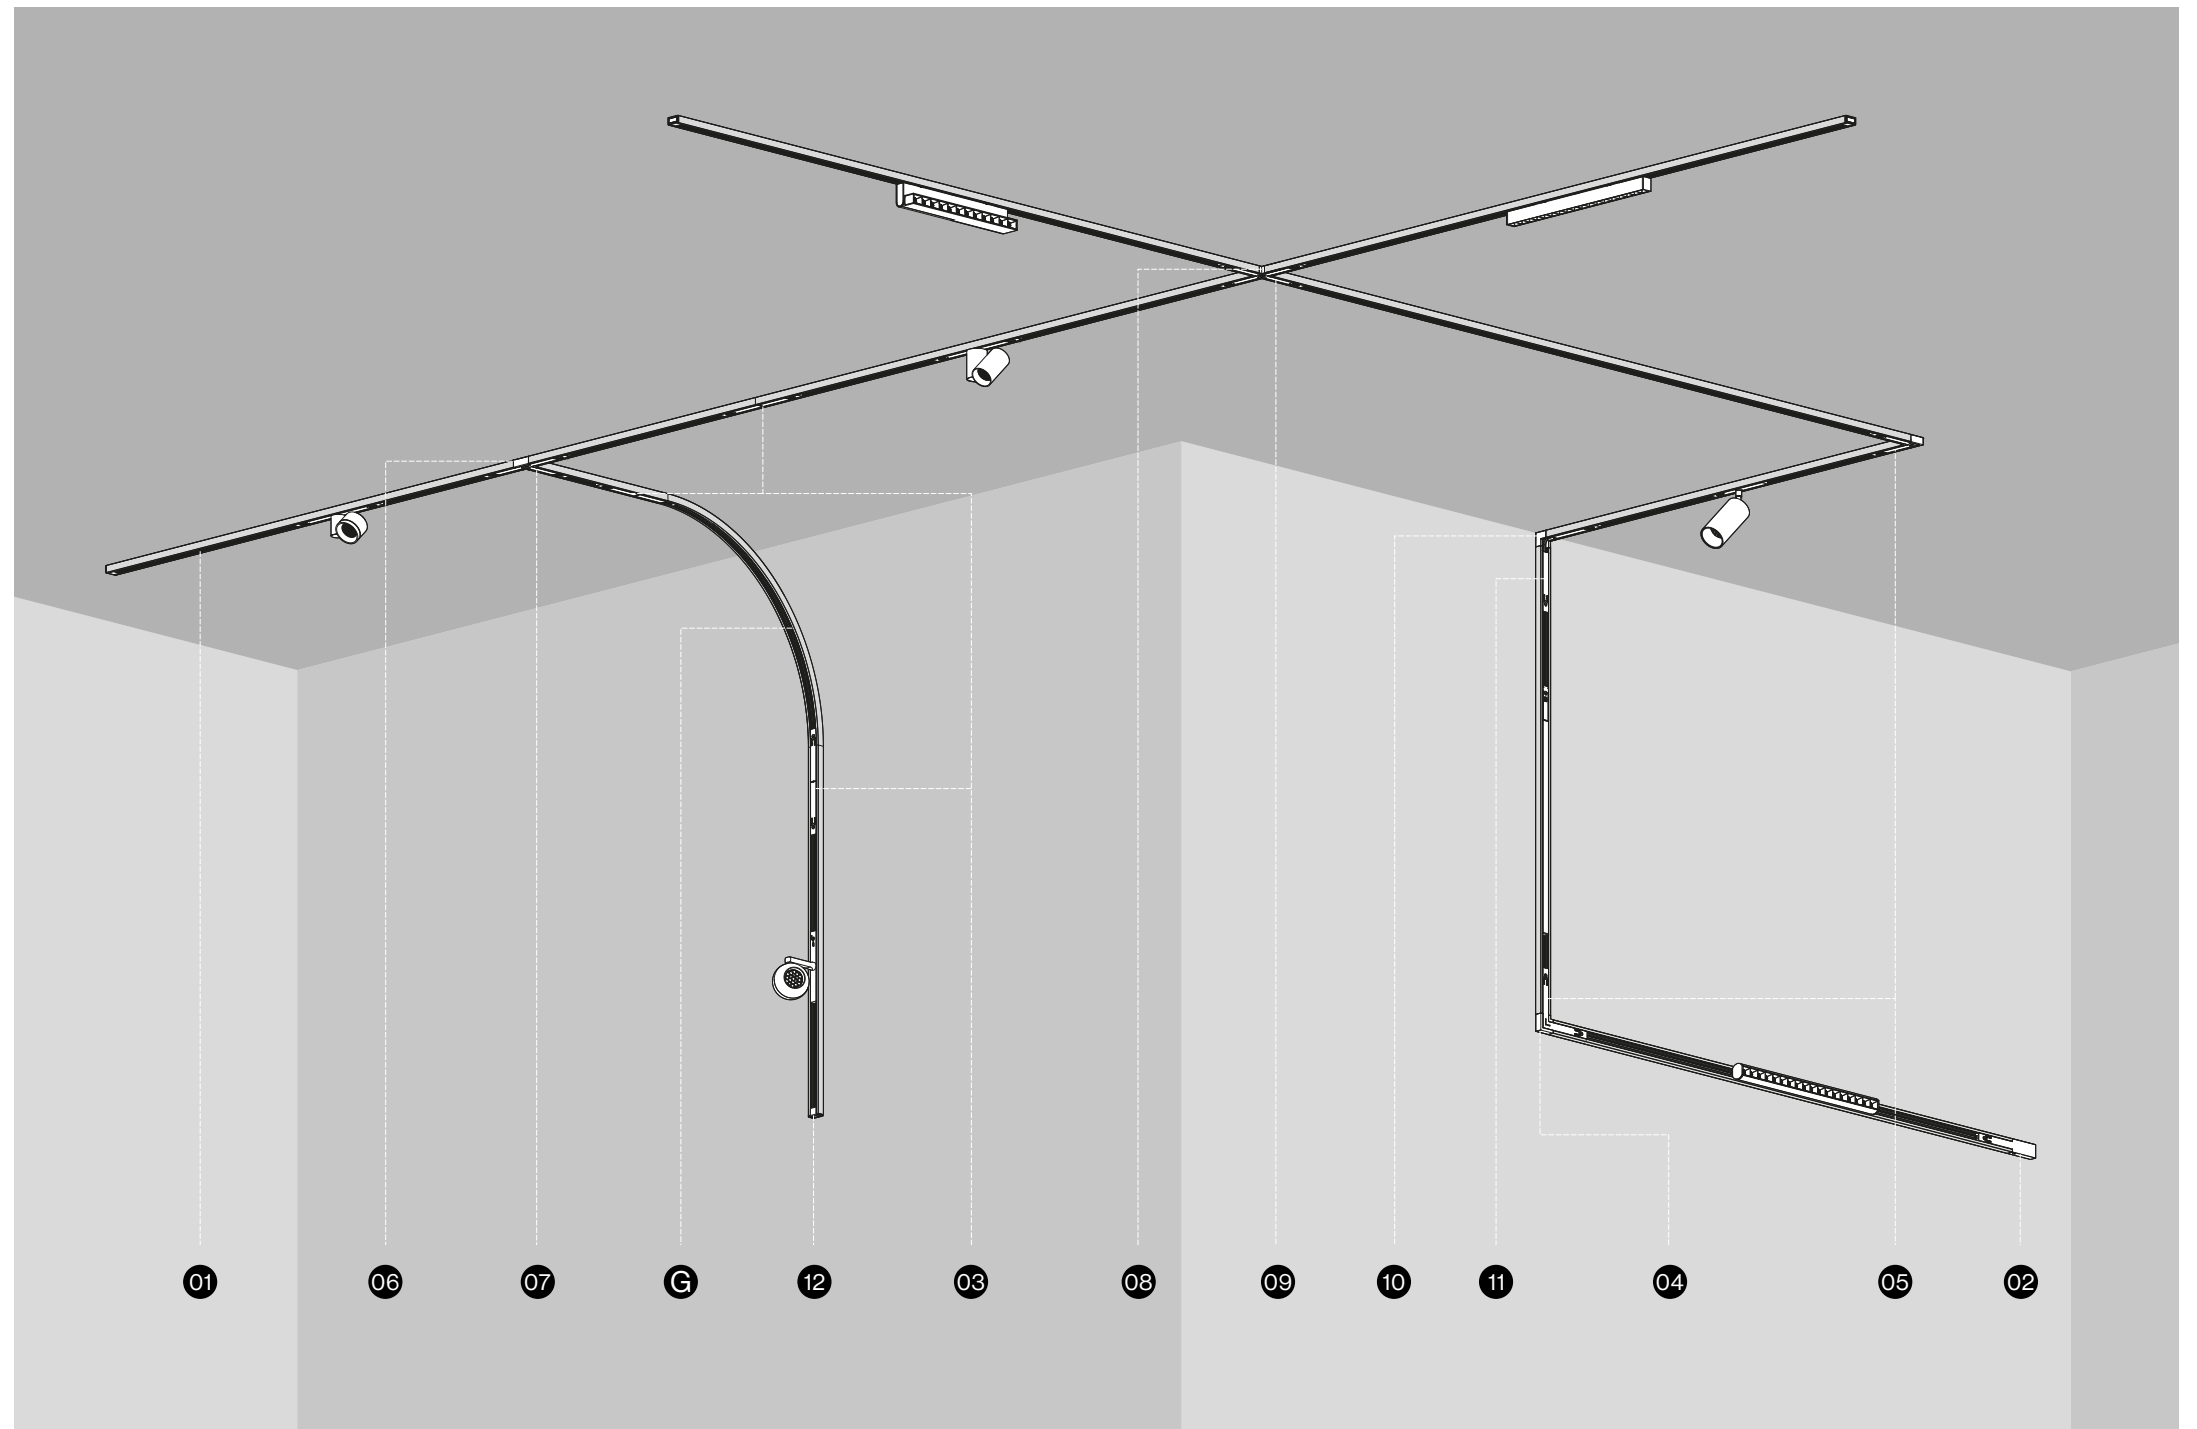

Your perfect curved track

The XS TRACK offers many solutions to compose curved profiles, with 45°, 90° and 180° curved connectors, Individualized solutions can be evaluated on request.



Curved track M19AC




48v


A Curved Track
R200 C90°
M19AC0
10.M19AC0490




B Curved Track
R300 C90°
M19AC1
10.M19AC0690




C Curved Track
R400 C45°
M19AC2
10.M19AC0845




D Curved Track
R800 C45°
M19AC3
10.M19AC1645





E Curved Track
R800 C90°
M19AC4
10.M19AC1690



F Curved Track
R800 C180°
M19AC5
10.M19AC1618



G Curved Track
R300 V90°
M19AV0
10.M19AV0690

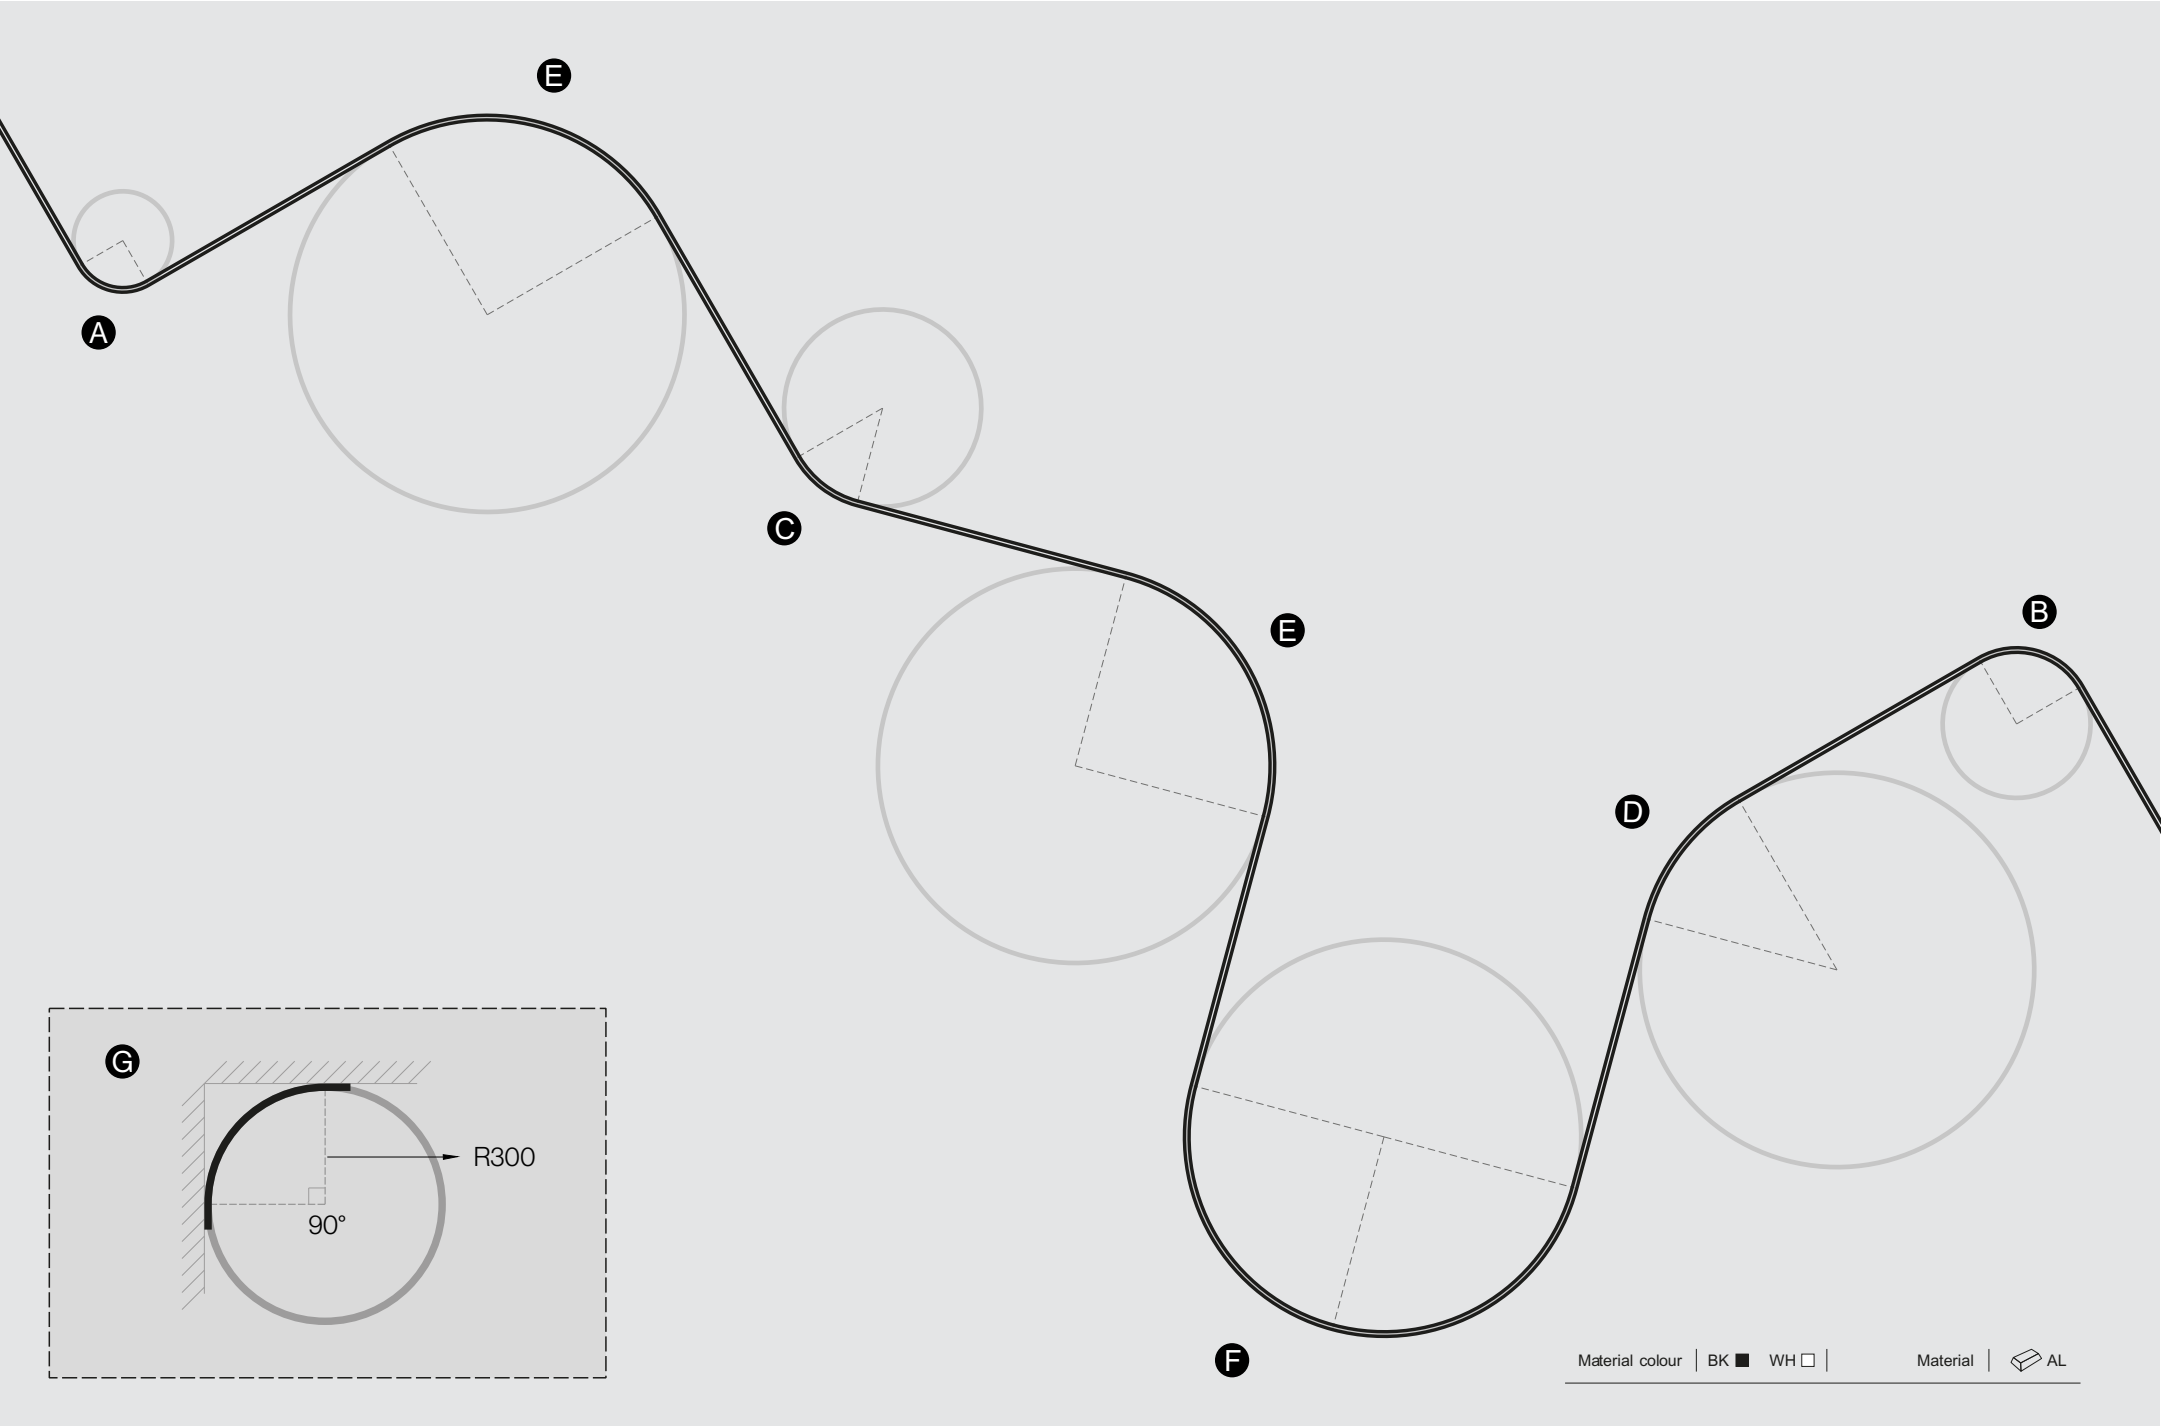

IT22
XS Track

It combines a compact design with high performance for accent lighting, offering flexible choices in colors and beam angles, structural design balances aesthetics and functionality.

XS TRACK M19A/M19O/M19T/M19E



IT22	10.001A01D00	IT1003
	Power	3W
	Beam angle	18°/23°/35°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	60lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
	CE CB TÜV        	
	Ingress Protection Voltage Class III 90° 355° Hot Plug Safe Flicker Free Adjustable	



IT28	10.002A01D00	IT1105
	Power	5.3W
	Beam angle	25°/31°/42°/56°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
	CE CB TÜV        	
	Ingress Protection Voltage Class III 90° 355° Hot Plug Safe Flicker Free Adjustable	



IT35	10.012A01D00	IT1208
	Power	8W
	Beam angle	22°/29°/37°/50°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
	CE CB TÜV        	
	Ingress Protection Voltage Class III 82° 355° Hot Plug Safe Flicker Free Adjustable	

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

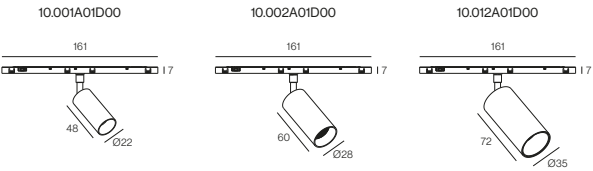

Colour | BK ■ WH □ | Material |  AL |

IT30

XS Track

Knurled ring on the projector, zoomable beam angles from 18° to 31°, excellent lighting solution for accent lighting, used for spaces in stores, galleries, residential, etc.



XS TRACK M19A/M19O/M19T/M19E



IT30	10.003A01D00	IT1305
	Power	5.3W
	Beam angle	18-31°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	36lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

82°

82°

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |



LO35

XS Track

A functional and attractive spotlight can satisfy different lighting requirements, with minimalistic and compact structure design.



XS TRACK M19A/M19O/M19T/M19E



L035	10.004A01D00	L00005
	Power	4.5W
	Beam angle	13°/20°/28°/60°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	66lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

180°

180°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

LO30

XS Track

The micro spotlight is specially designed for accent lighting, its mini structure allows it to be installed in a small space without being obtrusive.



XS TRACK M19A/M19O/M19T/M19E



LO30	10.005A01D00	L00105
	Power	5.3W
	Beam angle	25°/31°/42°/56°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

180°

180°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

XS TRACK M19A/M19O/M19T/M19E



TO50	10.006A01D00	TO1006
	Power	5.6W
	Beam angle	19°/26°/38°/58°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

Ingress Protection

Voltage

Class III

180°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

TO50
XS Track

It combines a compact design with high performance for accent lighting, offering flexible choices in colors and beam angles, structural design balances aesthetics and functionality.

Mars

XS Track

This product redefines conventional lighting with a flexible lamp head that adjusts easily to achieve the desired lighting angle, and automatically and easily rotate to achieve the ideal lighting effect.

XS TRACK M19A/M19O/M19T/M19E



Mars	10.013A01D00	MR1006
	Power	5.6W
	Beam angle	21°/26°/38°/52°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

180°

180°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |



XS TRACK M19A/M19O/M19T/M19E



Grille Fold	10.007A09D00	GF0009
Power	8.5W	
Beam angle	30°/36°/41°/60°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	73lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	SMD	

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Grille Fold	10.007A12D00	GF0111
Power	11W	
Beam angle	32°/36°/45°/65°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	79lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	SMD	

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

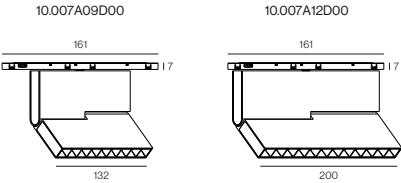

Colour | BK ■ WH □ | Material | AL |

Grille Fold
XS Track

Adjustable and folded mini grille light, which can be flexibly used in the spaces for accent lighting, pursuing visual comfort while keeping high lighting performance.



XS TRACK M19A/M19O/M19T/M19E



Grille Fold	10.011A12D00	GF0211
	Power	11W
	Beam angle	32°/36°/45°/65°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CECBTUV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Fold	10.011B12D00	FL0011
	Power	11W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	45lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CECBTUV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

Grille Fold
XS Track

This product redefines conventional lighting with a flexible lamp head that adjusts easily to achieve the desired lighting angle.adjust the irradiation angle, and automatically and easily rotate to achieve the ideal lighting effect.

Grille S

XS Track

It features a compact design with high performance, ideal for accent lighting applications, flexible choice for its colors and beam angles, structural design balances aesthetics and functionality.

XS TRACK M19A/M19O/M19T/M19E



Grille S	10.008A12D00	GR0011
	Power	11W
	Beam angle	32°/36°/45°/65°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Grille S	10.008A18D00	GR0109
	Power	8.5W
	Beam angle	30°/36°/41°/60°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

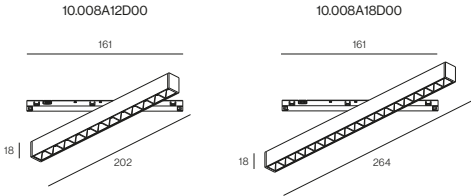

Colour | BK ■ WH □ | Material | AL |

Grille R

XS Track

The arc-shaped lamp body design makes it look softer and less tough, the mini grille light can be widely used for many different spaces with excellent anti-glare effects, such as stores, offices, etc.



XS TRACK M19A/M19O/M19T/M19E



Grille R	10.009A12D00	GR1011
	Power	11W
	Beam angle	32°/36°/45°/65°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Grille R	10.009A18D00	GR1109
	Power	8.5W
	Beam angle	30°/36°/41°/60°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

355°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

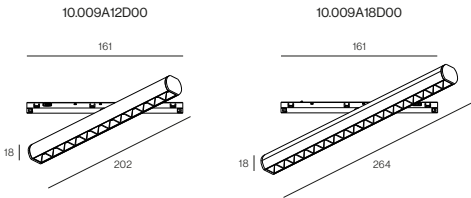

Colour | BK ■ WH □ | Material | AL |

XS TRACK M19A/M19O/M19T/M19E




Linear Bar	10.010A03000	LB0006
	Power	6W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV		IP20 Ingress Protection
		DC 48V Voltage
		Class III Class III
		Hot Plug Safe Hot Plug Safe
		Flicker Free Flicker Free
		Fixed Fixed

Linear Bar	10.010A06000	LB0112
	Power	12W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	80lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV		IP20 Ingress Protection
		DC 48V Voltage
		Class III Class III
		Hot Plug Safe Hot Plug Safe
		Flicker Free Flicker Free
		Fixed Fixed

Linear Bar	10.010A12000	LB0223
	Power	23W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	83lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV		IP20 Ingress Protection
		DC 48V Voltage
		Class III Class III
		Hot Plug Safe Hot Plug Safe
		Flicker Free Flicker Free
		Fixed Fixed

Options	
1	Non-dim

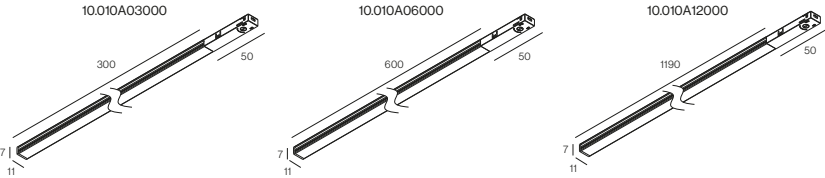

Colour | BK ■ WH □

Material | PC

Linear Bar
XS Track

The very thin linear luminary with diffused light that stands out for its small dimensions and discretion.

XS TRACK M19A



Roller	10.014A01D00	RL1006
	Power	6W
	Beam angle	17°/25°/35°/53°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	93lm/W
	Color rendering index	≥90
	Operating temperature	-20°C - 40°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

DC 48V

Class III

Hot Plug Safe

Flicker Free

Fixed

Roller	10.014A02D00	RL1108
	Power	8W
	Beam angle	17°/25°/35°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	94lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

DC 48V

Class III

Hot Plug Safe

Flicker Free

Fixed

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

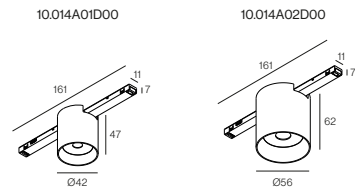


Colour | BK ■ WH □ |

Material | AL |

Roller
XS Track

Surface-mounted magnetic track lights are suitable for various places, such as homes, offices, shopping malls, hotels, exhibition halls, etc., They can provide you with a comfortable, efficient, and personalized lighting experience.

XS TRACK M19A

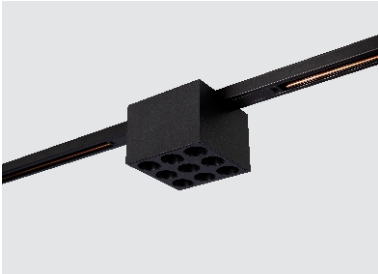

Cubilux	10.015A04D00	CB1006
	Power	6W
	Beam angle	25°/39°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	58lm/W
	Color rendering index	≥90
	Operating temperature	-20°C - 40°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CECBTUV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Fixed

Fixed

Cubilux	10.015A09D00	CB1110
	Power	10W
	Beam angle	25°/39°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	67lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CECBTUV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Fixed

Fixed

Options	
1	PWM
2	DALI
3	CASAMBI



Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ |

Material | AL |


Cubilux
XS Track

These lamps use magnetic mounting for quick and easy installation—no drilling required. convenient and fast, without drilling holes. They adopt a grid design, which is full of creativity. They can be combined into different shapes and effects according to personal preferences and space needs. The lamps have various colors and styles to choose from, to meet different decoration styles and atmosphere needs.

Basilisk



Introducing the fold curve, the evolution of our popular fold tracking light.
Experience the same space-saving folding design you love,
Now in a sleek, modern oval shape.

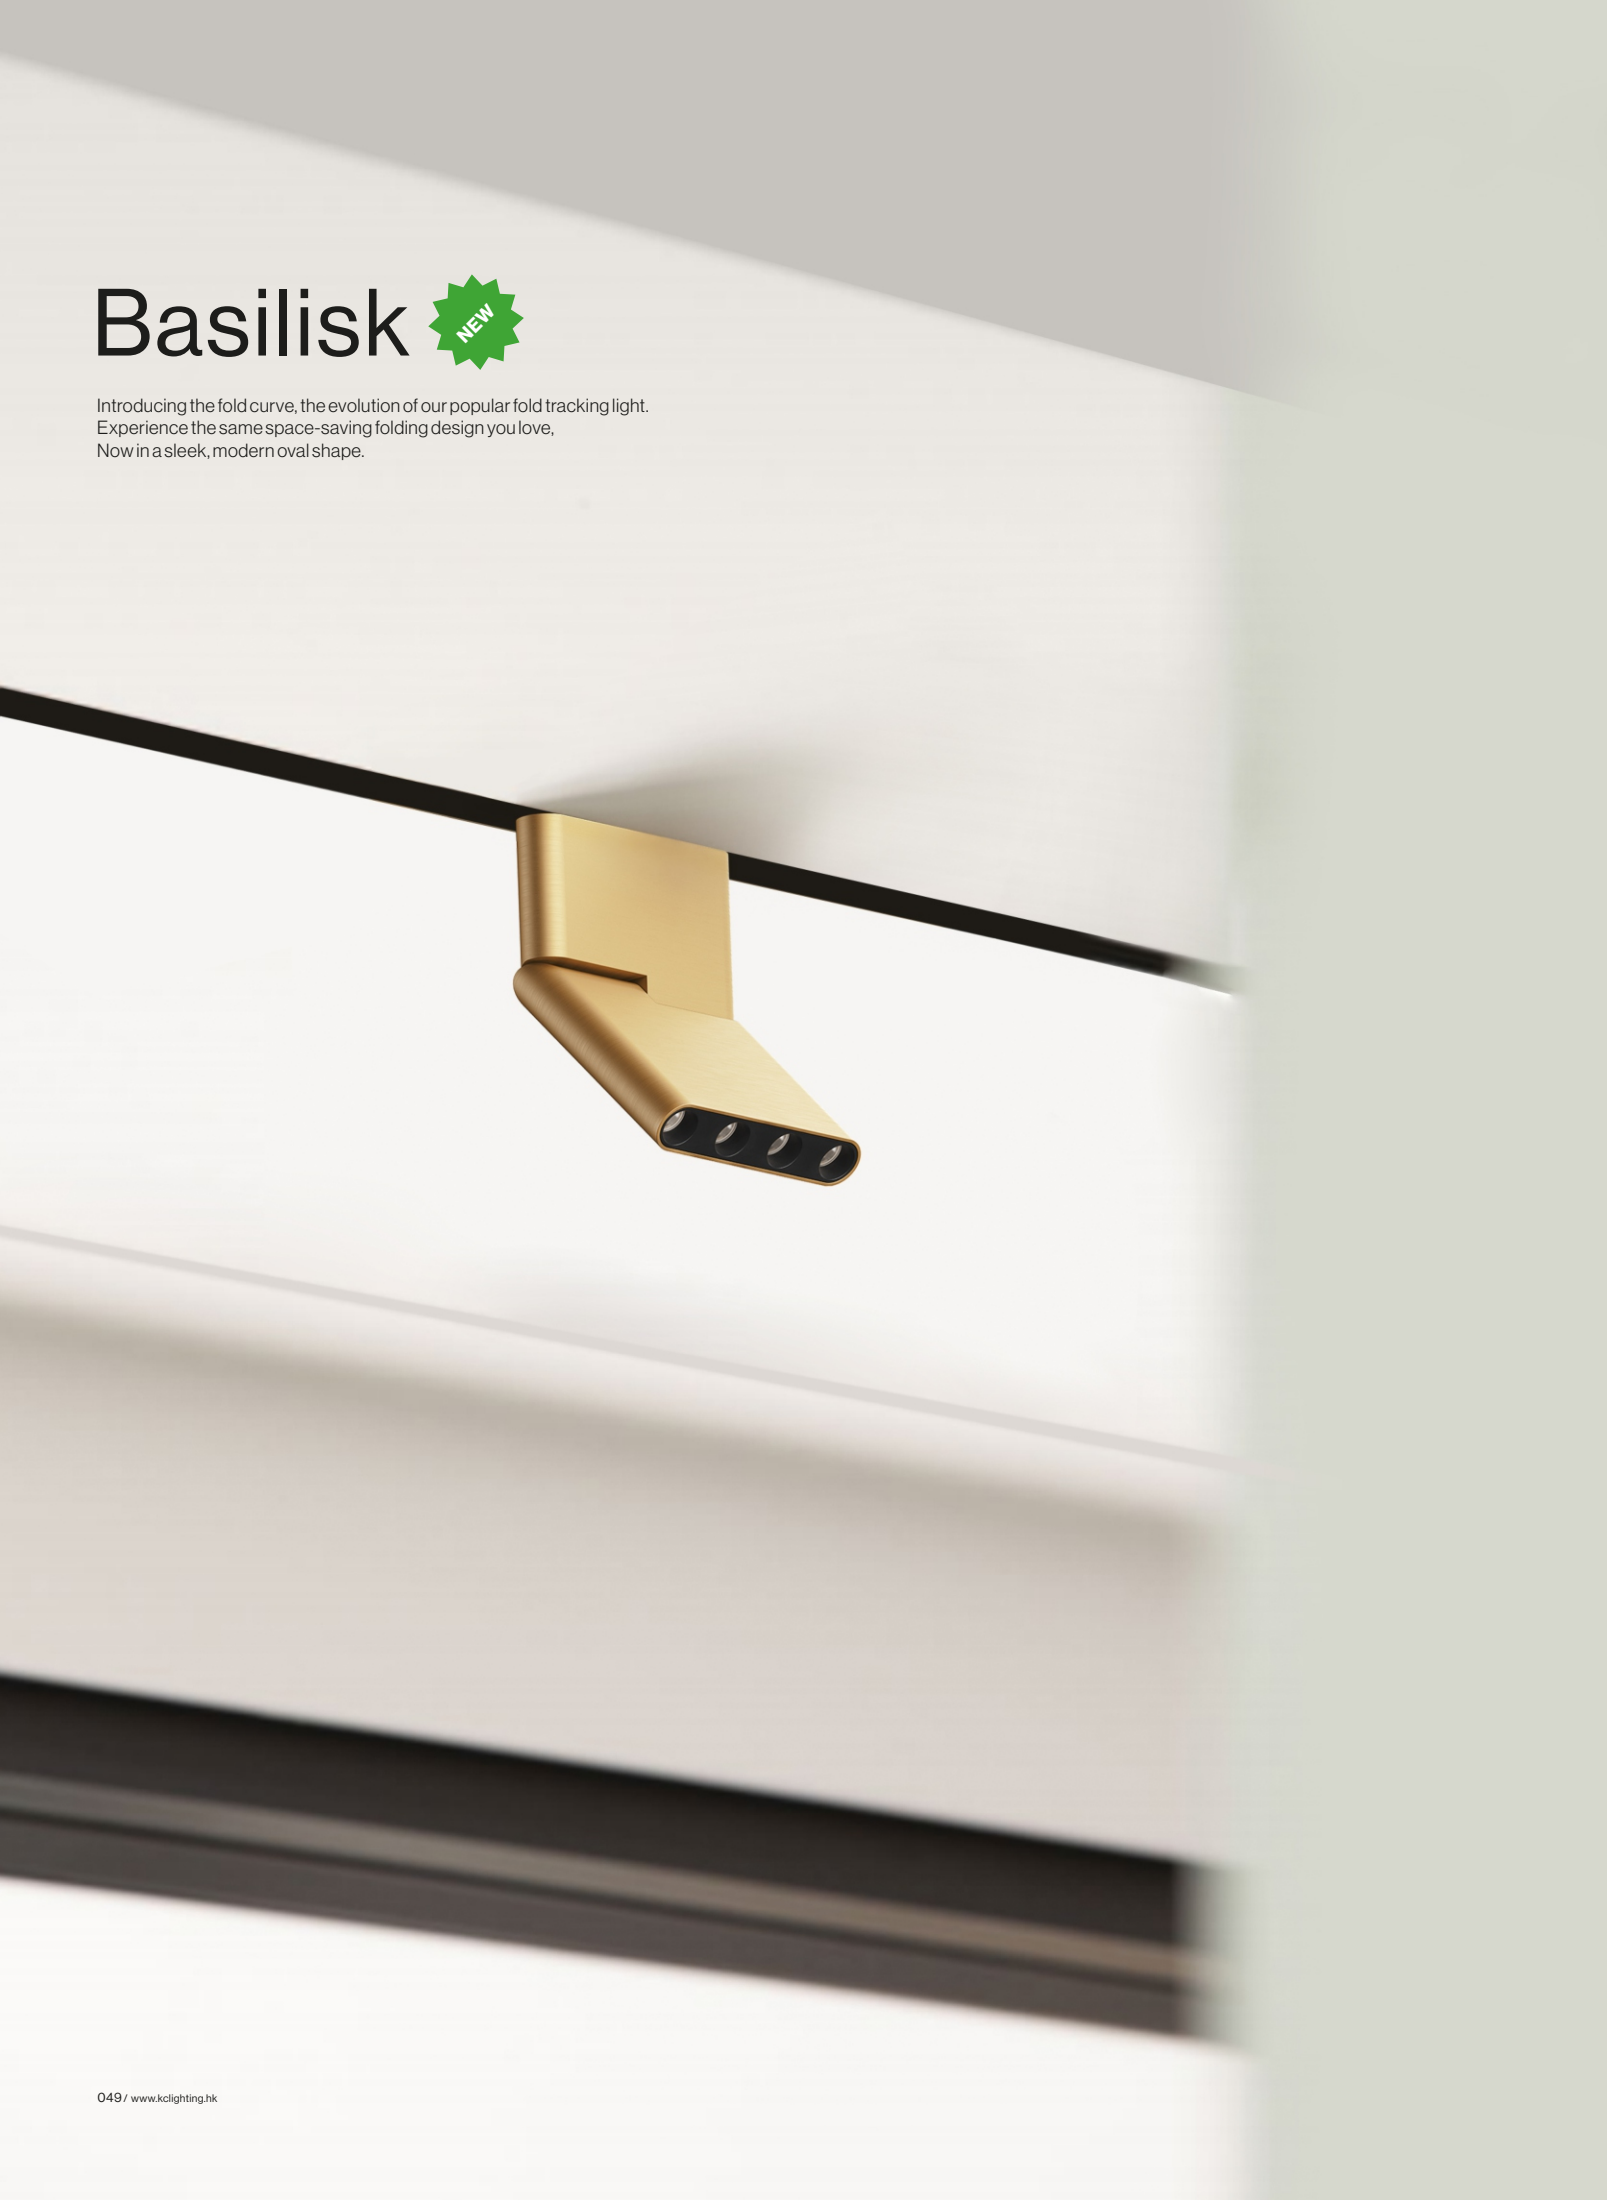

XS TRACK M19A/M19O/M19T/M19E



Basilisk	10.016A04D00	BL1006
	Power	6W
	Beam angle	27°/33°/43°/55°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	82lm/W
	Color rendering index	≥90
	Operating temperature	-20°C - 40°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TUV CCC ENEC

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

135°

135°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



XS TRACK M19A/M19O/M19T/M19E



355°

Basilisk NEW

Introducing the fold curve, the evolution of our popular fold tracking light. Experience the same space-saving folding design you love, Now in a sleek, modern oval shape.



Basilisk	10.017A12D00	BL1112
	Power	10W
	Beam angle	27°/33°/43°/55°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	96lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TUV CCC ENEC

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ GD ■ | Material | AL |

XS TRACK M19A/M19O/M19T/M19E



Cone	10.018B01D00	CN1010
Power	10W	
Beam angle	20°/28°/42°/52°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	116lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play


inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

Cone NEW

Introducing the cone track light: the iconic cone design, now with the versatility of magnetic track lighting.

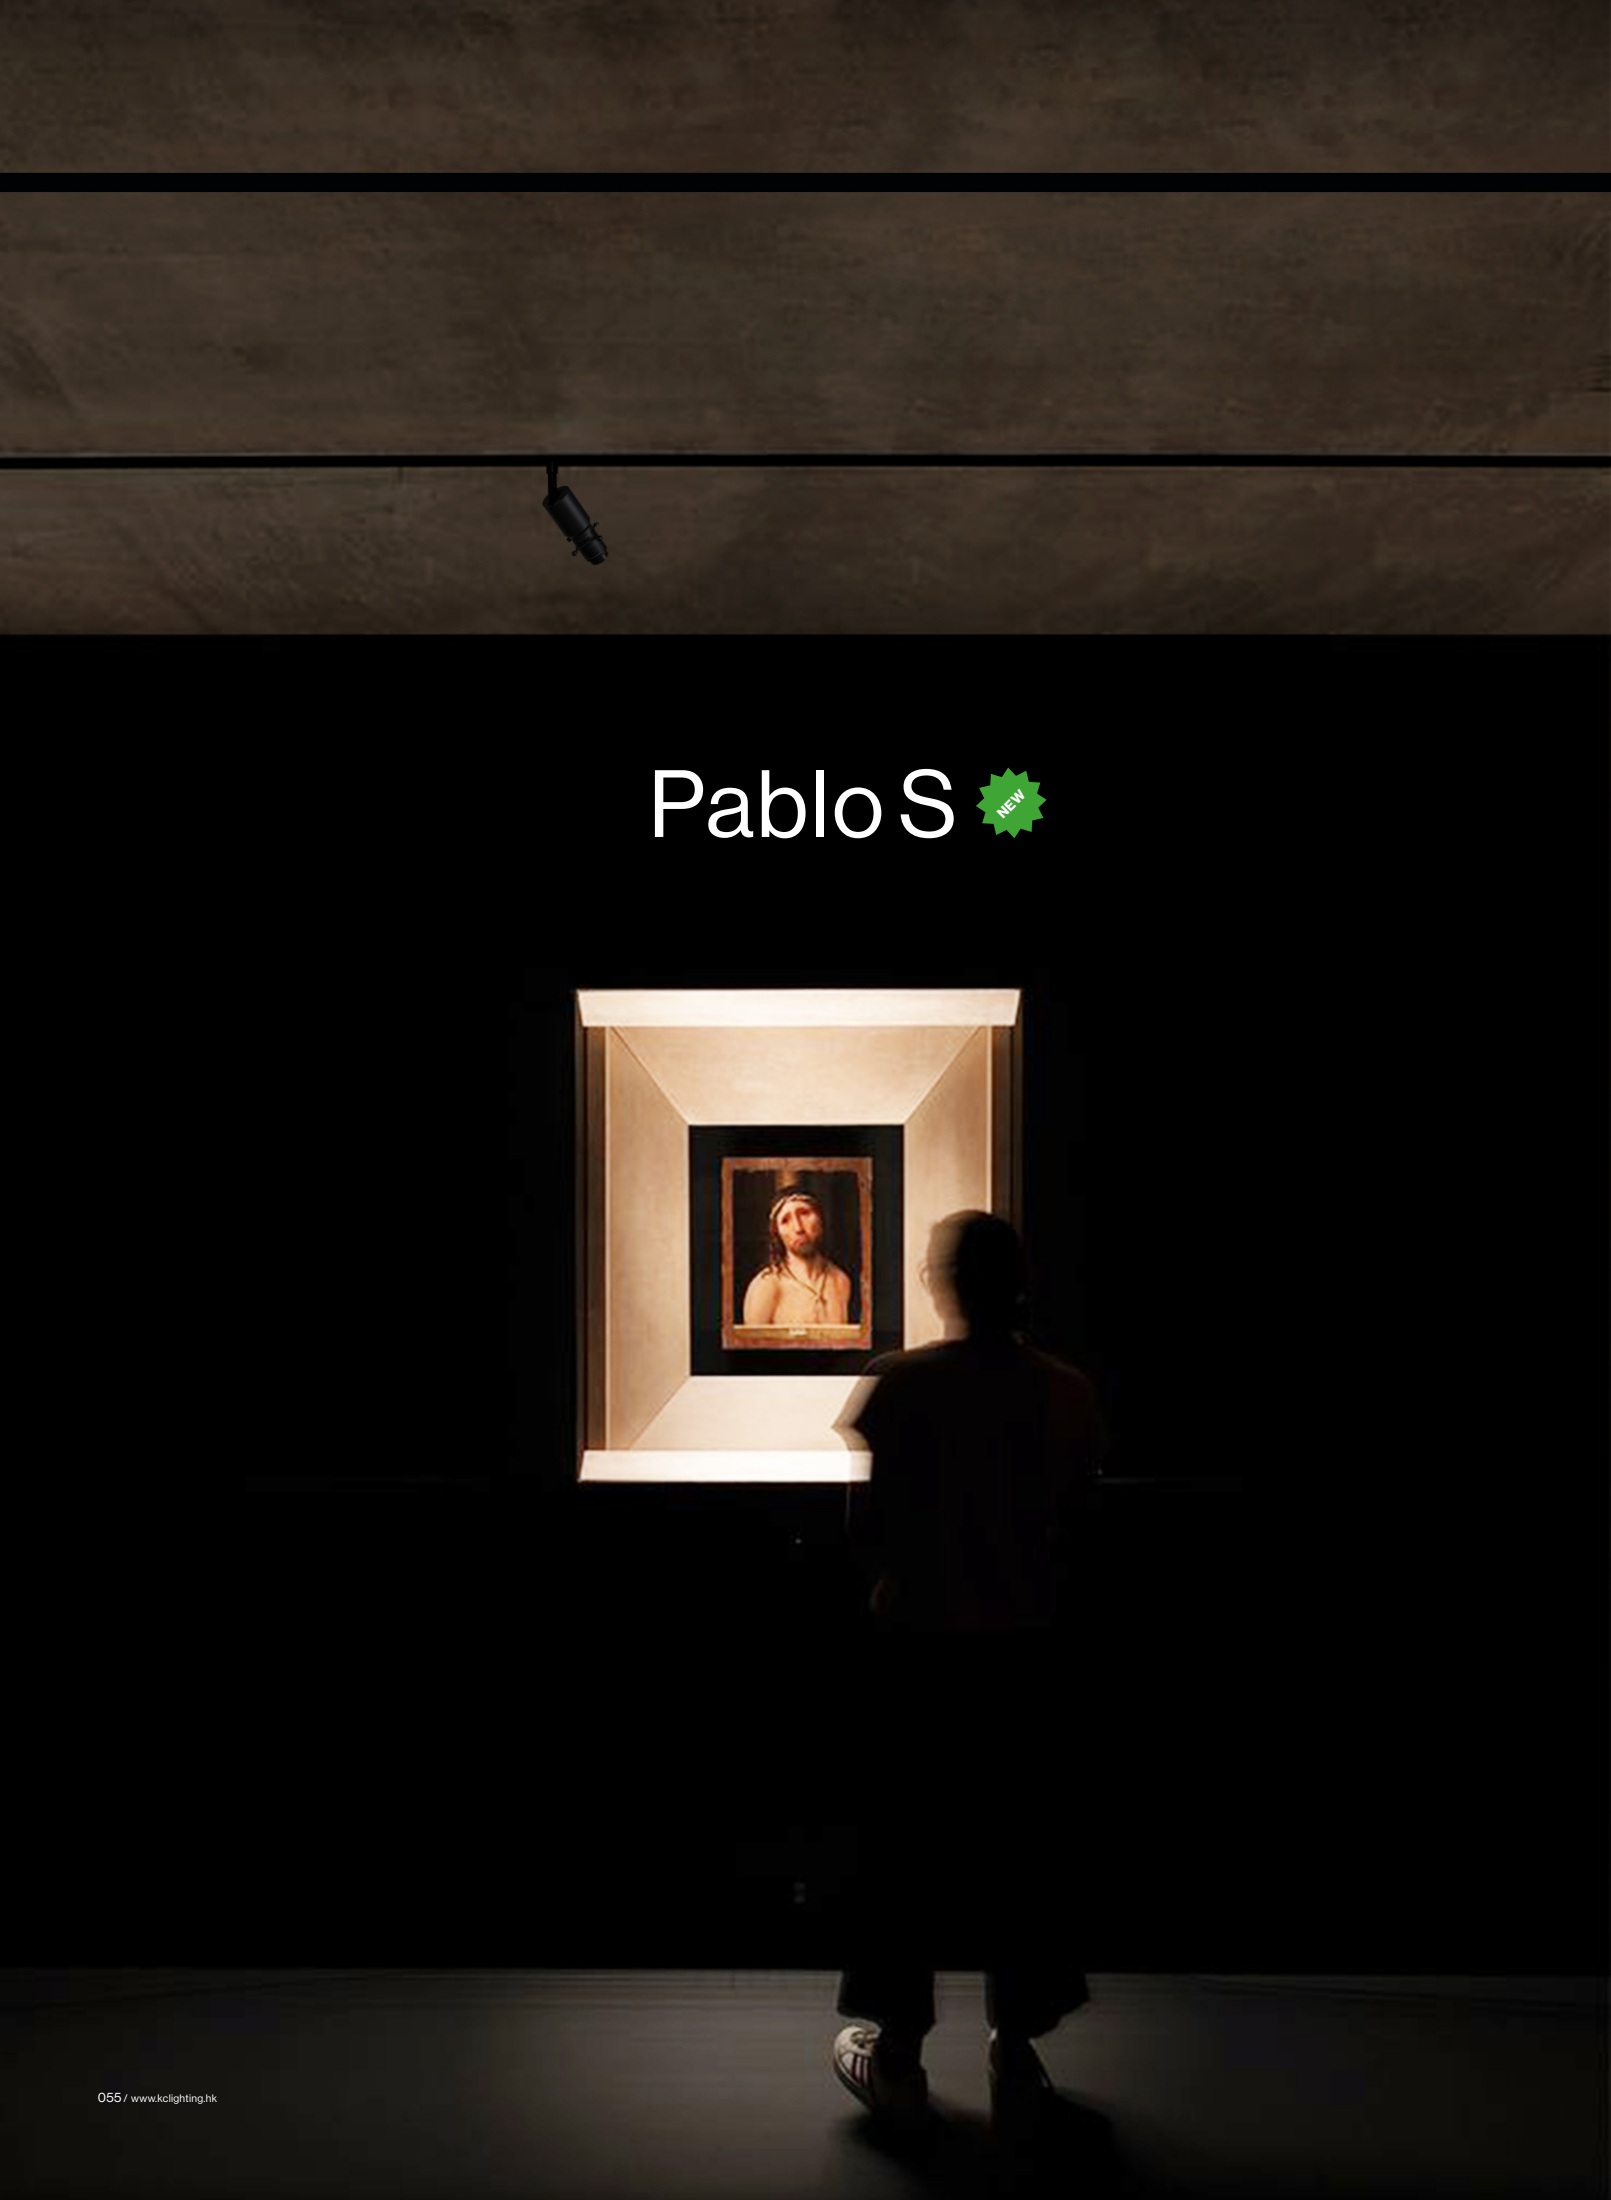

Pablo S NEW

XS TRACK M19A/M19O/M19T/M19E



Pablo S	10.019A01D00	PS1003
	Power	3W
	Beam angle	17°-36°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	12lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV CCC

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Pablo S	10.020A01D00	PS1106
	Power	6W
	Beam angle	20°-33°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	23lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV CCC

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

90°

90°

355°

355°

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options

1

PWM

2

DALI

3

CASAMBI

Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

Light spot shape choice

round

square


triangle

rectangle

trapezoid

sector

rhombus

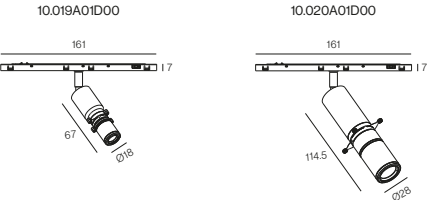

Colour | BK ■ WH □ | Material | AL |

XS TRACK M19A/M19O/M19T/M19E



TO80	10.021A01D00	TO1110
	Power	10W
	Beam angle	10°/24°/36°/58°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	118lm/W
	Color rendering index	≥90
	Operating temperature	-20°C - 40°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV CCC

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

355°

Hot Plug Safe

Flicker Free

Adjustable

TO60	10.022A01D00	TO1208
	Power	8W
	Beam angle	24°/30°/39°/48°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	114lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV CCC

IP20

Ingress Protection

DC 48V

Voltage

III

Class III

90°

355°

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

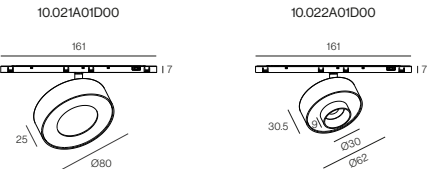

Colour | BK ■ WH □ | Material | AL |

TO60



The XS TO60 is a shooting light series suitable for low-voltage rail lights. It stands out with its light and elegant appearance. Minimalized design. You can move freely and make the spotlights facing any direction.

Botte

Powerhouse, big light, small package.



XS TRACK M19A/M19O/M19T/M19E



Botte	10.023A01D00	BT0002
	Power	2W
	Beam angle	29°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	77lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV CCC

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Fixed

Fixed

Options	
1	PWM
2	DALI
3	CASAMBI


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ | Material | AL |

MINI TRACK M26A

Surface/Suspended system

Quickinfo

General

Surface,Suspended

IP20

Electrical

NON DIM, DALI DIM , BLE MESH

Transparent Feeder Cable

Physical

aluminium

Spray Powder

Spotlight insets



Graphic light insets











Grille



Description

Extruded aluminium profile with 26mm width groove. It can be surface mounted or suspended. The cable can be adjusted without tools from maximum 1500mm. 90°connectors make variety shaping possibilities. 4 wires inset can support more options of dimming system.



MINI TRACK M26A Suspended /surface
order installation track, light insets, mounting accessories separately
Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

Features

CASAMBI



inset single control via
Casambi app




48v

Model No.	Size(mm)	Product Name	Code No.
M26A10	1000	Track	07.M26A10000
M26A20	2000	Track	07.M26A20000
M26A30	3000	Track	07.M26A30000
M26AV0	100x100	Channel Corner*V90°	07.M26AV9000
M26AH0	100x100	Channel Corner*H90°	07.M26AH9000
M26AE0	100x100	Channel Corner*E90°	07.M26AE9000
M26AX0	77x77	X-Shaped Corner*X90°	07.M26AX9000
M26AT0	180x77x77	T-Shaped Corner*T90°	07.M26AT9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L07	2000x35x22.5	Pendant Kit	07.M26L06000
M26L08	2000x65	Pendant Kit	07.M26L07000
M26L09	405x22x42 215x115x30 215x115x30	Insert Power Supply Power Supply /LRS/350W/48V Power Supply /UHP/200W/48V	07.M26L10000 2.01.MW022 2.01.MW023
M26L10		Driver Box	07.M26L08000
Material colour BK ■ WH □ Material AL			

MINI TRACK M26T

trimless system

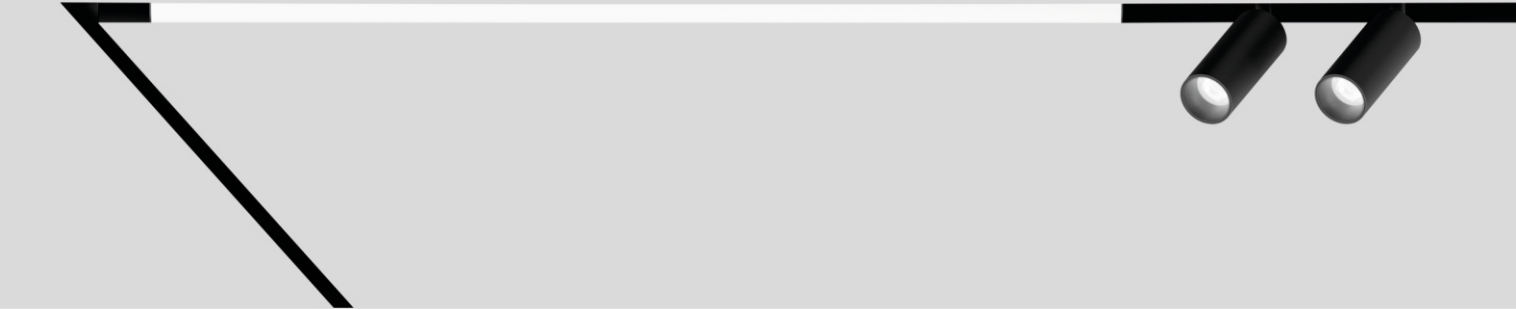

Quickinfo

General
Recessed trimless
IP20

Electrical
NON DIM, DALI DIM, BLE MESH

Physical
aluminium
Spray powder

Spotlight insets



Graphic light insets




Grille



Description

Extruded aluminium profile with 26mm width groove. It's recessed trimless type. The cable can be adjusted without tools from maximum 1500mm. 90°connectors make variety shaping possibilities. 4 wires inset can support more options of dimming system.

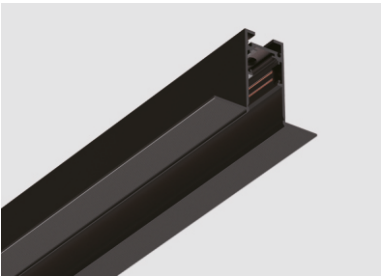

MINI TRACK M26T Trimless
order installation track, light insets, mounting accessories separately
Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

Features

CASAMBI



inset single control via
Casambi app



48v

Model No.	Size(mm)	Product Name	Code No.
M26T10	1000	Track	07.M26T10000
M26T20	2000	Track	07.M26T20000
M2630	3000	Track	07.M26T30000
M26TV0	100x100	Channel Corner *V90°	07.M26TV9000
M26TH0	100x100	Channel Corner *H90°	07.M26TH9000
M26TE0	100x100	Channel Corner *E90°	07.M26TE9000
M26TX0	77x77	X- Shaped Corner *X90°	07.M26TX9000
M26TT0	180x77x77	T- Shaped Corner *T90°	07.M26TT9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

Material colour | BK ■ WH □ | Material | AL

MINI TRACK M26R

trim system



Quickinfo

General

Recessed, Trim

IP20

Electrical

NON DIM, DALI DIM , BLE MESH

Transparent feeder cable

Physical

aluminium

Spray powder

Spotlight insets



Graphic light insets



Grille



Description

Extruded aluminium profile with 26mm width groove. It's recessed type with frame. 90° connectors make variety shaping possibilities. 4 wires inset can support more options of dimming system.



MINI TRACK M26R Trim
order installation track, light insets, mounting accessories separately
Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

Features

CASAMBI



inset single control via
Casambi app




48v

Model No.	Size(mm)	Product Name	Code No.
M26R10	1000	Track	07.M26R10000
M26R20	2000	Track	07.M26R20000
M26R30	3000	Track	07.M26R30000
M26RV0	100x100	Channel Corner *V90°	07.M26RV9000
M26RH0	100x100	Channel Corner *H90°	07.M26RH9000
M26RE0	100x100	Channel Corner *E90°	07.M26RE9000
M26RX0	77x77	X- Shaped Corner *X90°	07.M26RX9000
M26RT0	180x77x77	T-Shaped Corner *T90°	07.M26RT9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L06	54x26	End Caps	07.M26L05R00
M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

Material colour | BK ■ WH □ | Material | AL

MINI TRACK M26E

trimless system

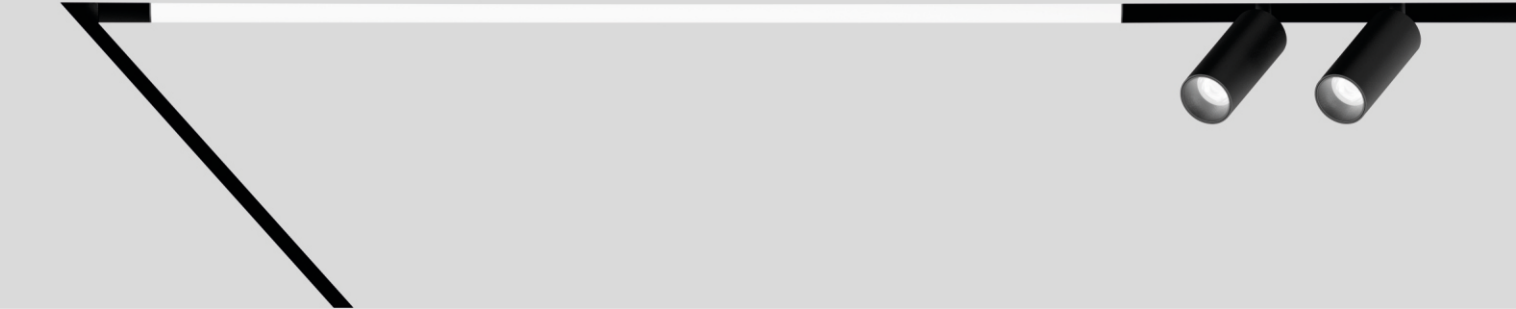

Quickinfo

General

Recessed trimless

IP20

Electrical

NON DIM, DALI DIM , BLE MESH

Transparent feeder cable

Physical

aluminium

Spray Powder

Spotlight insets



Graphic light insets




Grille



Description

Extruded aluminium profile with 26mm width groove. It's recessed trimless type. 90°connectors make variety shaping possibilities. 4 wires inset can support more options of dimming system.

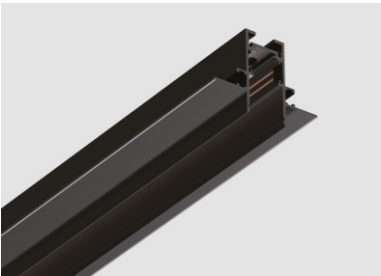

MINI TRACK M26E Trimless

order installation track, light insets, mounting accessories separately

Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

Features

CASAMBI



inset single control via
Casambi app



48v

Model No.	Size(mm)	Product Name	Code No.
M26E10	1000	Track	07.M26E10000
M26E20	2000	Track	07.M26E20000
M26E30	3000	Track	07.M26E30000
M26EV0	100x100	Channel Corner *V90°	07.M26EV9000
M26EH0	100x100	Channel Corner *H90°	07.M26EH9000
M26EE0	100x100	Channel Corner *E90°	07.M26EE9000
M26EX0	77x77	X- Shaped Corner *X90°	07.M26EX9000
M26ET0	180x77x77	T-Shaped Corner *T90°	07.M26ET9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

Material colour | BK ■ WH □ | Material | AL

MINI TRACK M26S

surface system



Quickinfo

General
Surface
IP20

Electrical
NON DIM, DALI DIM , BLE MESH
Transparent Feeder Cable

Physical
aluminium
Spray powder

Spotlight insets



Graphic light insets




Grille



Description

Extruded aluminium profile with 26mm width groove. It's recessed trimless type. 90°connectors make variety shaping possibilities. 4 wires inset can support more options of dimming system.

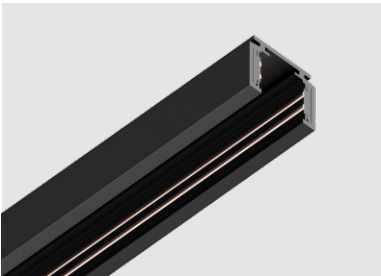

MINI TRACK M26S Surface
order installation track, light insets, mounting accessories separately
Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

Features

CASAMBI




inset single control via
Casambi app




48v


Model No.	Size(mm)	Product Name	Code No.
M26S10	1000	Track	07.M26S10000
M26S20	2000	Track	07.M26S20000
M26S30	3000	Track	07.M26S30000




M26SV0	50x50	Channel Corner *V90°	07.M26SV9000
--------	-------	----------------------	--------------




M26SH0	50x50	Channel Corner *H90°	07.M26SH9000
--------	-------	----------------------	--------------




M26SE0	50x50	Channel Corner *E90°	07.M26SE9000
--------	-------	----------------------	--------------




M26SX0	110x110	X- Shaped Corner *X90°	07.M26SX9000
--------	---------	------------------------	--------------



M26ST0	110x68x21.5	T-Shaped Corner *T90°	07.M26ST9000
--------	-------------	-----------------------	--------------



M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
--------	-----------------------	-------------------	--------------




M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
--------	------------------------	-------------------	--------------



M26L03	130x17x16	Linear Flexible	07.M26L03000
--------	-----------	-----------------	--------------



M26L14	124x17x16/160x22	Linear Connector	07.M26L04S00
--------	------------------	------------------	--------------



M26L11	26.4x21.5	End Caps	07.M26L05S00
--------	-----------	----------	--------------



M26L09	405x22x42	Insert Power Supply	07.M26L10000
--------	-----------	---------------------	--------------

Material colour | BK ■ WH □ |


Material | AL

MINI TRACK M26A/M26T/M26R/M26E/M26S



Pablo S

Magnetic suction cutoff lamp, rail adjustable focus rail lamp, fixed focus lens, focusing range 1:1, compact size, excellent performance, COB light source high-definition projection, millimeter level cutoff, accurate cutoff, and uniform illumination.

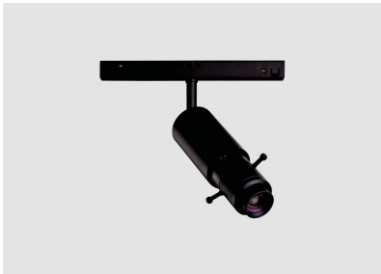

Pablo S	07.002X01000	PS2010
	Power	10W
	Beam angle	52°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	31lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

90°

90°

365°

365°

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Pablo S	07.002X02000	PS2110
	Power	10W
	Beam angle	16°-34°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	31lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

90°

90°

365°

365°

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Adjustable

Adjustable

Options

1

Non-dim

2

0/1-10V

3

DALI

4

Bluetooth

5

ZigBee

Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

Light spot shape choice

round

square


triangle

rectangle

trapezoid

sector

rhombus

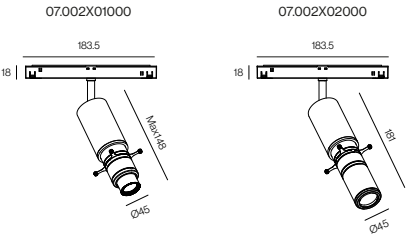

Material colour | BK | Material | AL



IT



MINI TRACK M26A/M26T/M26R/M26E/M26S



IT25	07.008A01000	IT2003
	Power	3W
	Beam angle	16°/20°/33°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	60lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		



IT35	07.001A01000	IT2108
	Power	8W
	Beam angle	20°/26°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		



IT35-2	07.001A02000	IT2116
	Power	2*8W
	Beam angle	20°/26°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		

Colour | BK ■ WH □ BK+GD ■ WH+GD ■ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



IT45	07.002A01000	IT2212
	Power	12W
	Beam angle	18°/23°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	83lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		



IT45-2	07.002A02000	IT2224
	Power	2*12W
	Beam angle	18°/23°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

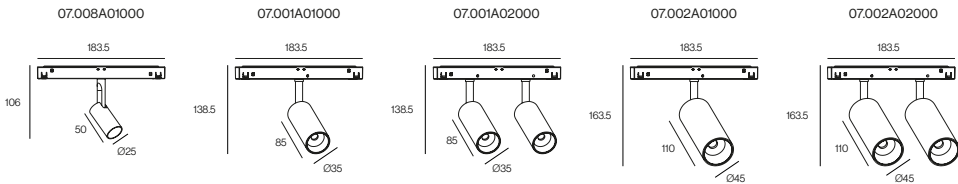

Colour | BK ■ WH □ BK+GD ■ WH+GD ■ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



IT45



IT45	07.002B01000	IT2212
	Power	12W
	Beam angle	18°/23°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	83lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		

IT45-2	07.002B02000	IT2224
	Power	2*12W
	Beam angle	18°/23°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° 365° 365° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

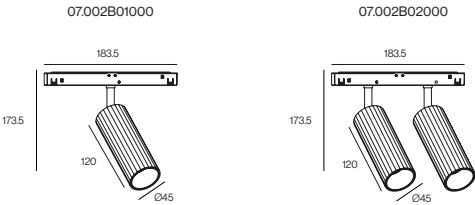

Colour | BK WH BR | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



IT55	07.003A01000	IT2315
	Power	15W
	Beam angle	15°/25°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	86lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CECBTUV IP20 DC 48V Class III Tunable White 90° 365° DALI2 Hot Plug Safe Flicker Free Adjustable		



IT55	07.003B01000	IT3015
	Power	15W
	Beam angle	15°-36°/30°-55°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	90lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CECBTUV IP20 DC 48V Class III Tunable White 90° 365° DALI2 Hot Plug Safe Flicker Free Adjustable		



IT70	07.006A01000	IT2425
	Power	25W
	Beam angle	15°/25°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	86lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CECBTUV IP20 DC 48V Class III Tunable White 90° 365° DALI2 Hot Plug Safe Flicker Free Adjustable		

Colour | BK ■ WH □ BK+GD ■ WH+GD ■ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



IT70	07.006B01000	IT3125
	Power	25W
	Beam angle	15°-36°/30°-60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	98lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB
CECBTUV IP20 DC 48V Class III Tunable White 90° 365° DALI2 Hot Plug Safe Flicker Free Adjustable		

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

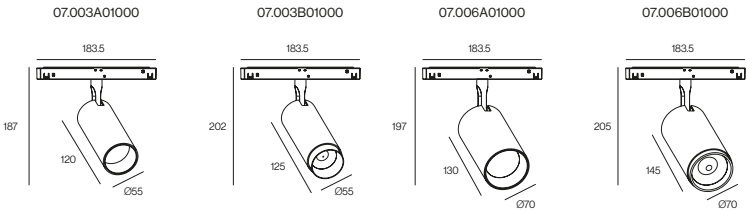

Colour | BK ■ WH □ BK+GD ■ WH+GD ■ | Material | AL |



MINI TRACK M26A/M26T/M26R/M26E/M26S



TO	07.005A01000	TO2015/TO2020
	Power	15W/20W
	Beam angle	15°/25°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	111lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20
Ingress Protection

DC 48V
Voltage

Class III

Tunable White

355°

365°

DALI2

Hot Plug Safe

Flicker Free

Adjustable



TO	07.005B01000	TO3015
	Power	15W
	Beam angle	wallwasher
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	73lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20
Ingress Protection

DC 48V
Voltage

Class III

Tunable White

355°

365°

DALI2

Hot Plug Safe

Flicker Free

Adjustable



TO	07.005C01000	TO4020
	Power	20W
	Beam angle	15°/25°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	111lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TUV

IP20
Ingress Protection

DC 48V
Voltage

Class III

Tunable White

355°

365°

DALI2

Hot Plug Safe

Flicker Free

Adjustable

TO

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

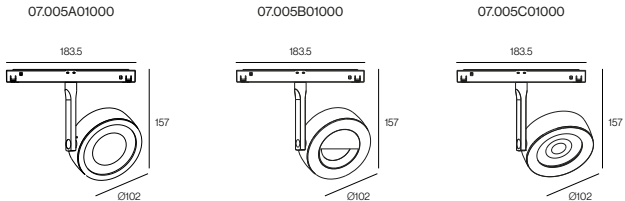

Colour | BK ■ WH □ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



Launcher	07.048A02000	LC0004
	Power	4W
	Beam angle	22°/36°/45°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	64lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CECBTUV

IP20

DC 48V

Class III

Tunable White

90°

365°

DALI2

Hot Plug Safe

Flicker Free

Adjustable

Launcher	07.048A05000	LC0110
	Power	10W
	Beam angle	22°/36°/45°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CECBTUV

IP20

DC 48V

Class III

Tunable White

90°

365°

DALI2

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

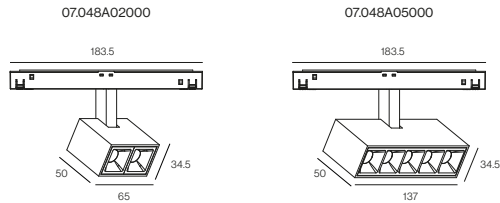

Launcher



The new icon in lighting structures: thanks to its unique design and magnetic technology infra structure offers a singular way to improve your lighting design in the architectural space.



Fold



MINI TRACK M26A/M26T/M26R/M26E/M26S



Fold	07.007A06000	GF1010
	Power	10W
	Beam angle	18°/23°/35°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	95lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		



Fold	07.007A12000	GF1120
	Power	20W
	Beam angle	18°/23°/35°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	99lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		



Fold	07.007B06000	FL1010
	Power	10W
	Beam angle	110°
	Color temperature	3000K/4000K/6000K/3000K-6000K
	Light efficiency	49lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		

Colour | BK ■ WH □ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



Fold	07.007B12000	FL1120
	Power	20W
	Beam angle	110°
	Color temperature	3000K/4000K/6000K/3000K-6000K
	Light efficiency	46lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TÜV IP20 Ingress Protection DC 48V Voltage Class III Class III Tunable White Tunable White 90° 90° DALI2 DALI2 Hot Plug Safe Hot Plug Safe Flicker Free Flicker Free Adjustable Adjustable		

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

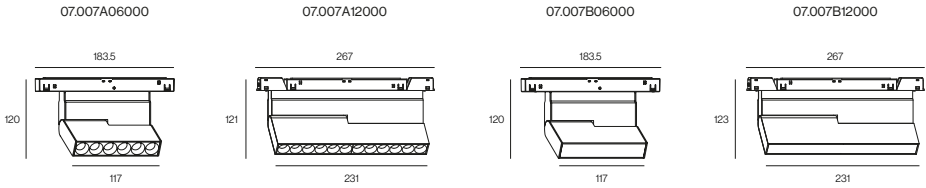

Colour | BK ■ WH □ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



Grille light	07.021A06000	GR2010
	Power	10W
	Beam angle	18°/23°/35°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	95lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

UGR<19

UGR<19

Fixed

Fixed

Grille light	07.021A12000	GR2120
	Power	20W
	Beam angle	18°/23°/35°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	99lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

UGR<19

UGR<19

Fixed

Fixed

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee



Features

CASAMBI

Available on the App Store

GET IT ON Google Play


inset single control via Casambi app




Colour | BK ■ WH □ | Material | AL |

Grille light

String

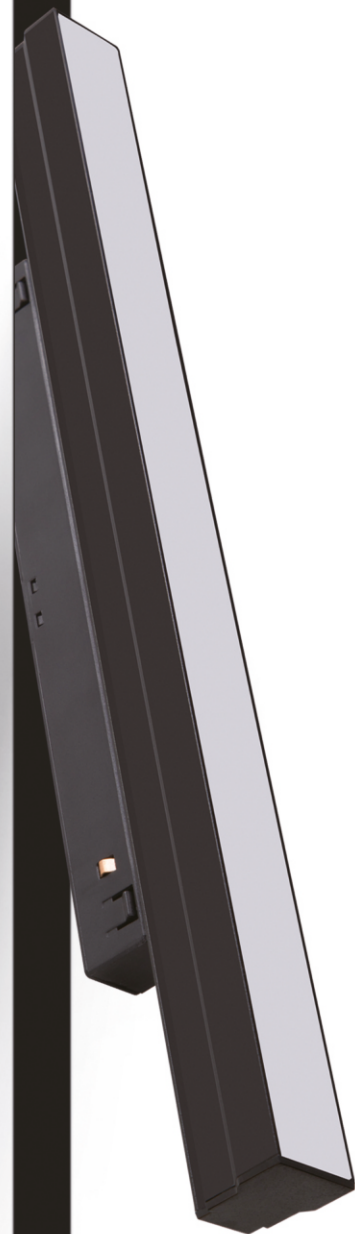

MINI TRACK M26A/M26T/M26R/M26E/M26S

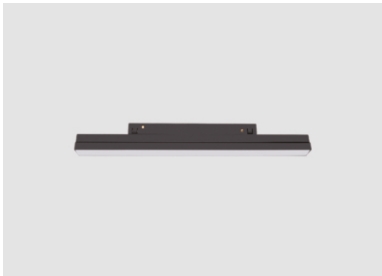

String	07.022A03000/07.022B03000	SG0010/SG1010
	Power	10W
	Beam angle	100°/UGR90°
	Color temperature	3000K/4000K/6000K/3000K-6000K
	Light efficiency	95lm/W / UGR91lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TUV IP20 Ingress Protection DC 48V Voltage III Class III Tunable White DALI2 Hot Plug Safe Flicker Free Fixed		



String	07.022A06000/07.022B06000	SG0120/SG1120
	Power	20W
	Beam angle	100° /UGR 90°
	Color temperature	3000K/4000K/6000K/3000K-6000K
	Light efficiency	116lm/W/UGR 95lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TUV IP20 Ingress Protection DC 48V Voltage III Class III Tunable White DALI2 Hot Plug Safe Flicker Free Fixed		



String	07.022A09000/07.022B09000	SG0230/SG1230
	Power	30W
	Beam angle	100°/UGR90°
	Color temperature	3000K/4000K/6000K/3000K-6000K
	Light efficiency	100lm/W/UGR 97lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TUV IP20 Ingress Protection DC 48V Voltage III Class III Tunable White DALI2 Hot Plug Safe Flicker Free Fixed		

Colour | BK ■ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



String	07.022A12000/07.022B12000	SG0320/SG1320
	Power	40W
	Beam angle	100°/UGR90°
	Color temperature	3000K/4000K/6000K/3000K-6000K
	Light efficiency	99lm/W/UGR95lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD
CE CB TUV IP20 Ingress Protection DC 48V Voltage III Class III Tunable White DALI2 Hot Plug Safe Flicker Free Fixed		

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

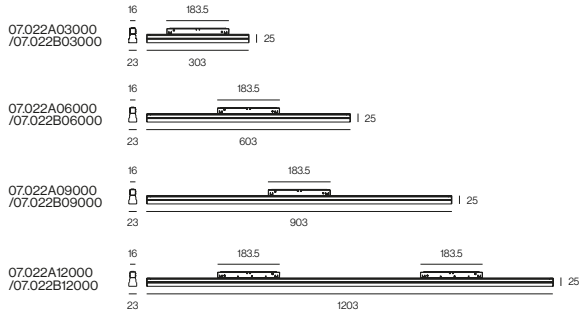

Colour | BK ■ | Material | AL |

MINI TRACK M26S



Roller	07.014A02000	RL4108
	Power	8W
	Beam angle	17°/25°/35°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	94lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Roller 

Colour | BK ■ WH □ | Material |  AL |



Cubilux 

MINI TRACK M26S



Cubilux	07.015A09000	CB5010
	Power	10W
	Beam angle	25°/39°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	68lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD




Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee

Features







inset single control via
Casambi app



Colour | BK ■ WH □ | Material |  AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S

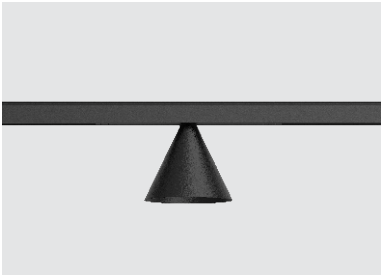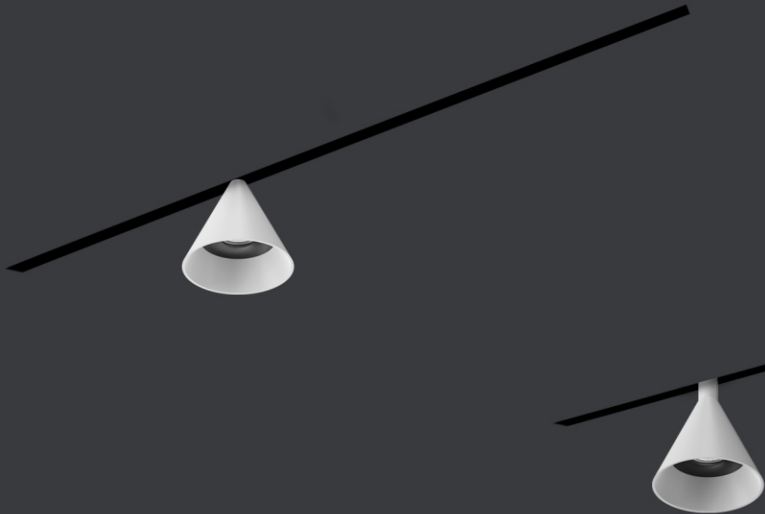

Cone S	07.052A01000	CN3010
Power	10W	
Beam angle	20°/28°/42°/52°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	116lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	

CECBTUV

IP20

DC 48V

Class III

DALI2

Hot Plug Safe

Flicker Free

Fixed

Cone S	07.052B01000	CN4010
Power	10W	
Beam angle	20°/28°/42°/52°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	116lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	

CECBTUV

IP20

DC 48V

Class III

DALI2

Hot Plug Safe

Flicker Free

Fixed

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee



Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Cone S



The iconic cone design, now with the versatility of magnetic track lighting.

Colour | BK ■ WH □ | Material | AL

MINI TRACK M26A/M26T/M26R/M26E/M26S



Barral	07.053A02000	BR0020
	Power	2*10W
	Beam angle	18°/25°/38°/52°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	109lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □

Material | AL

Barral



The double barrel track light elevates your lighting experience with its innovative double-light design. This modern fixture seamlessly integrates with magnetic track systems, offering exceptional versatility and control over your space.



Cup

Simple design, focused illumination



MINI TRACK M26A/M26T/M26R/M26E/M26S



Cup	07.054A01000	CP0010
	Power	10W
	Beam angle	19°-45°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	66lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app




Colour | BK ■ WH □ | Material | AL |

Soul



MINI TRACK M26S

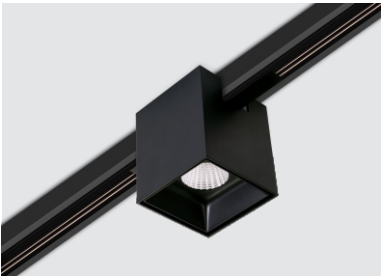

Soul	07:183B02000	SU0015
Power	15W	
Beam angle	25°/30°/46°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	83lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



Soul	07:183B02010	SU1015
Power	15W	
Beam angle	25°/30°/46°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	83lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee

Features


CASAMBI

Available on the App Store


GET IT ON Google Play

inset single control via Casambi app

07:183B02000



07:183B02010





Colour | BK ■ WH □

Material | AL

MINI TRACK M26A/M26T/M26R/M26E/M26S



Cubilux P

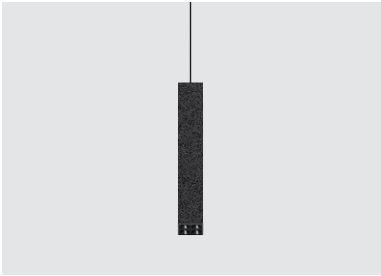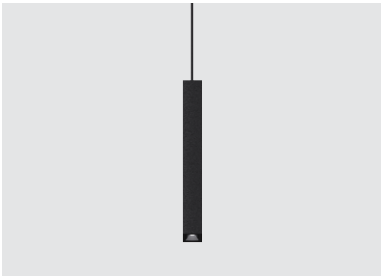

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee

Cubilux P	07.055A01000	CB6002
Power	2W	
Beam angle	18°/30°/36°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	49lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	SMD	

CE CB TÜV 

 IP20
Ingress Protection

 DC 48V
Voltage

 Class III

 DALI 2

 Hot Plug Safe

 Flicker Free

 Pendant

Cubilux P	07.055A04000	CB6106
Power	6W	
Beam angle	30°/41°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	66lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	SMD	

CE CB TÜV 

 IP20
Ingress Protection

 DC 48V
Voltage

 Class III

 DALI 2

 Hot Plug Safe

 Flicker Free

 Pendant

Cubilux P	07.055A09000	CB6210
Power	10W	
Beam angle	30°/41°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	75lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	SMD	

CE CB TÜV 

 IP20
Ingress Protection

 DC 48V
Voltage

 Class III

 DALI 2

 Hot Plug Safe

 Flicker Free


 Pendant

Features



Available on the App Store
GET IT ON Google Play

inset single control via Casambi app

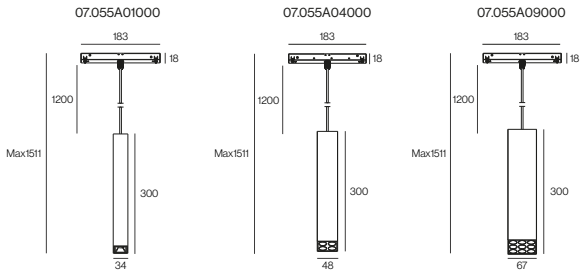

Colour | BK ■ WH □ | Material |  AL |



Pic

MINI TRACK M26A/M26T/M26R/M26E/M26S



Pic	07.056A01000	PC2010
	Power	10W
	Beam angle	18°/26°/34°/50°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

DC 48V

Class III

DALI2

Hot Plug Safe

Flicker Free

Pendant

Pic	07.056B01000	PC3010
	Power	8W
	Beam angle	18°/26°/35°/51°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

DC 48V

Class III

15°

DALI2

Hot Plug Safe

Flicker Free

Adjustable

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

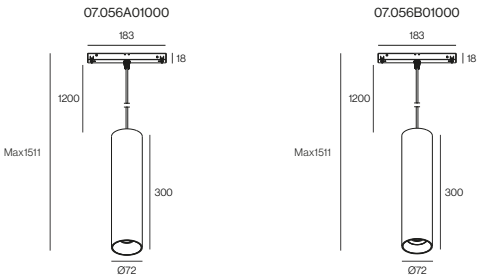

MINI TRACK M26A/M26T/M26R/M26E/M26S

Ball	07.035A01000	BA0006
Power		6W
Beam angle		150°
Color temperature		2700K/3000K/3500K/4000K/3000K-6000K
Light efficiency		85lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD

CE CB TUV

IP20

DC 48V

Class III

Tunable White

DALI 2

Hot Plug Safe

Flicker Free

Pendant

Ball	07.035A02000	BA0110
Power		10W
Beam angle		150°
Color temperature		2700K/3000K/3500K/4000K/3000K-6000K
Light efficiency		89lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD

CE CB TUV

IP20

DC 48V

Class III

Tunable White

DALI 2

Hot Plug Safe

Flicker Free

Pendant

Ball	07.035A03000	BA0212
Power		12W
Beam angle		150°
Color temperature		2700K/3000K/3500K/4000K/3000K-6000K
Light efficiency		92lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD

CE CB TUV

IP20

DC 48V

Class III

Tunable White

DALI 2

Hot Plug Safe

Flicker Free

Pendant

Ball

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

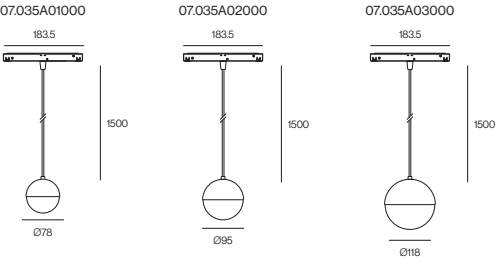


Colour | BK ■ WH □ GD ■ CR ■ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



Lead ball

Luminaires are available in different colour versions for matching the luminaire colour to the surroundings.

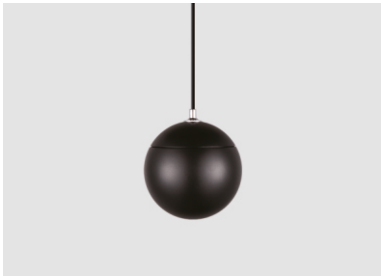

Lead ball	07.042A01000	LE0008/LE0010
	Power	8W/10W
	Beam angle	27°/37°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	50lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI 2

DALI 2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ GB ■ CR ■ | Material | AL |



Moon

The new icon in lighting structures: thanks to its unique design and magnetic technology infra structure offers a singular way to grow your lighting design in the architectural space.

MINI TRACK M26A/M26T/M26R/M26E/M26S



Moon	07.040A01000	MO0030
	Power	30W
	Beam angle	110°
	Color temperature	2700K/3000K/3500K/4000K/3000K-6000K
	Light efficiency	80lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | WH ☐ BK ☒ WH+GD ☐ BK+GD ☐

Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



Cone



Cone	07.036A01000	CN2020
	Power	20W
	Beam angle	18°/25°/36°/60°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	104lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI 2

DALI 2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK+GD BK+WH | Material | AL |



Gyro

Simple design, interesting light, decorating the space, at the same time, creating warm atmosphere.

MINI TRACK M26A/M26T/M26R/M26E/M26S



Gyro	07.043A01000	GY0008
	Power	8W
	Beam angle	19°/23°/31°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	56lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

DC 48V

Class III

Tunable White

DALI 2

Hot Plug Safe

Flicker Free

Pendant

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



Colour | BK ■ WH □ BR ■ | Material | AL |

MINI TRACK M26A/M26T/M26R/M26E/M26S



Mino	07.032A33000	MN1010
	Power	10W
	Beam angle	18°/23°/32°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	91lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Mino	07.032B33000	MN2010
	Power	10W
	Beam angle	18°/23°/32°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	91lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

07.032A33000

black

red

green

blue

yellow

07.032B33000

black

red

green

blue

yellow

Options

1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee

Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app

07.032A33000

183.5

330

Ø51.5

07.032B33000

183.5

330

Ø51.5

Mino



Mino

MINI TRACK M26A/M26T/M26R/M26E/M26S



Mino	07.033A20000	MN3012
	Power	12W
	Beam angle	24°/32°/36°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	73lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Mino	07.033A30000	MN3115
	Power	15W
	Beam angle	24°/32°/36°
	Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
	Light efficiency	73lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB

CE CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Class III

Class III

Tunable White

Tunable White

DALI2

DALI2

Hot Plug Safe

Hot Plug Safe

Flicker Free

Flicker Free

Pendant

Pendant

Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app



COLOUR | BK ■ WH □ GD ■ | MATERIAL | AL |

Meteor

In this typology of products, not only a high technical performance of the luminaires is required, but also a decorative elegance, which is vital.

MINI TRACK M26A/M26T/M26R/M26E/M26S



Meteor	07.044A01000	ME0003
	Power	3W
	Beam angle	18°/22°/32°
	Color temperature	2700K/3000K/3500K/4000K
	Light efficiency	66lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	SMD



Options	
1	Non-dim
2	0/1-10V
3	DALI
4	Bluetooth
5	ZigBee


Features

CASAMBI

Available on the App Store

GET IT ON Google Play

inset single control via Casambi app




COLOUR | BK ■ WH □ GD ■ | MATERIAL | AL |

Armada

Revolutionary product that allows movement management in the three axes: rotation, tilting and active linear motion (ALM) - allowing full spectrum repositioning options.



Armada	13.001A01000	AM0030
	Power	30W
	Beam angle	13°-50°
	Color temperature	2700K-6000K
	Light efficiency	53lm/W
	Color rendering index	≥90
	Operating temperature	-25°C - 50°C
	Rated life hours	35,000-50,000h LM80
	LED chip	COB




Options	
1	Casambi

Features

CASAMBI




inset single control via
Casambi app



COLOUR | BK ■ WH □ |

MATERIAL |  AL |

Motorized
TRACK

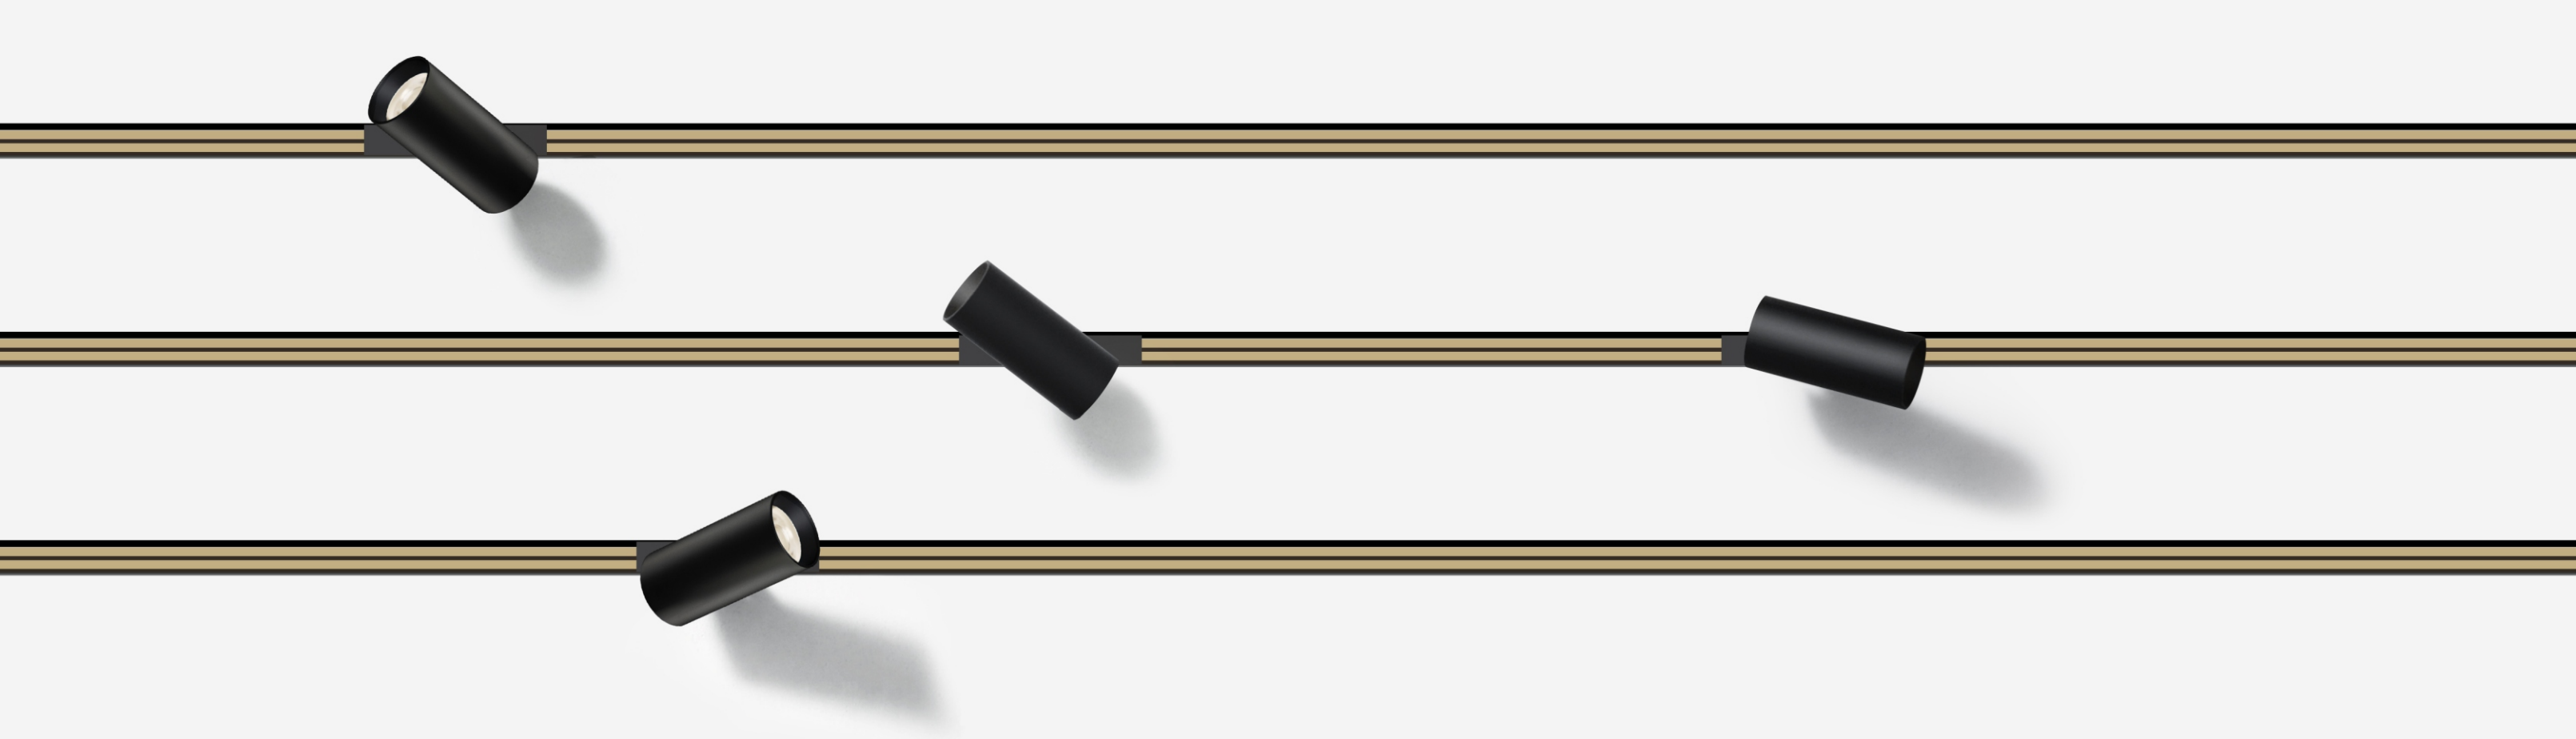

Endless possibilities

Armada is a revolutionary track light system offering unparalleled control and flexibility. Integrated with the Casambi app, Armada elevates the lighting experience to a new level.

Unmatched features and flexibility



Armada's design allows for full mobility, allows movement management in the three axes: rotation, tilting and translation. This provides dynamic lighting options tailored to any environment. Armada also offers adjustable color temperature for creating the perfect ambiance and features a unique liquid plasma zoom for precise light control.

Advanced wireless control with casambi technology



Integrated with Casambi technology, Armada is future-proof and energy-efficient. Casambi's self-organizing network allows effortless control of multiple fixtures, with seamless firmware updates and synchronization.

The Casambi app, available for iOS and Android, serves as an intuitive user interface for easy commissioning and remote control. It displays only relevant functionalities for each fixture, Making it an ideal luminaire for museum and banquet hall applications.



Upgrade to Armada today and experience the future of lighting control with flexibility, precision, and advanced technology.

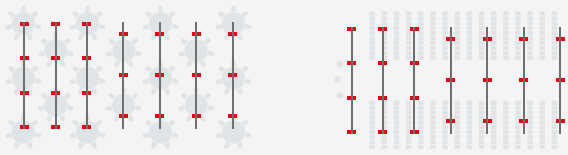



Scene 1.





Scene 2.





Scene 3.



Scene 4.



Scene 5.





GUANGDONG KC LIGHTING CO.,LTD

No. 13 Lianbao Road, Shengfeng Community,
Xiaolan Town, Zhongshan City,Guangdong,China

Tel: +86 760 22389158/+86 760 22382108
E-mail: info@kclighting.hk
Fax: +86 760 22382109
Web: www.kclighting.hk

